




# MATERIALS & COLOR SCHEME

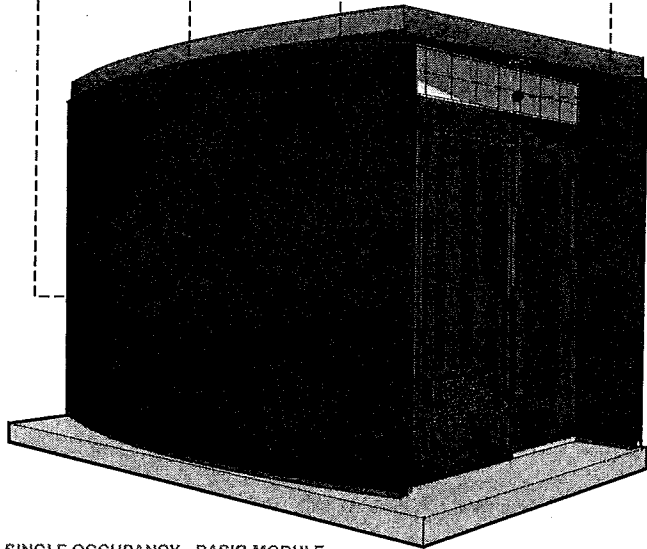


SINGLE OCCUPANCY - BASIC MODULE




# DESIGN OPTION

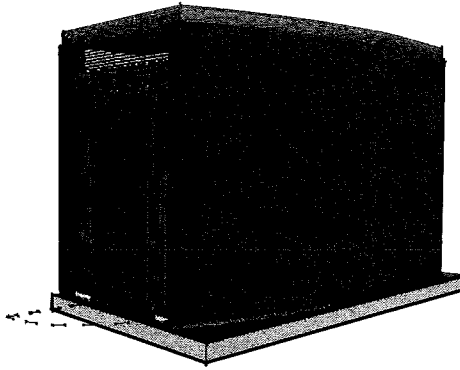


SINGLE OCCUPANCY - BASIC MODULE REAR VIEW

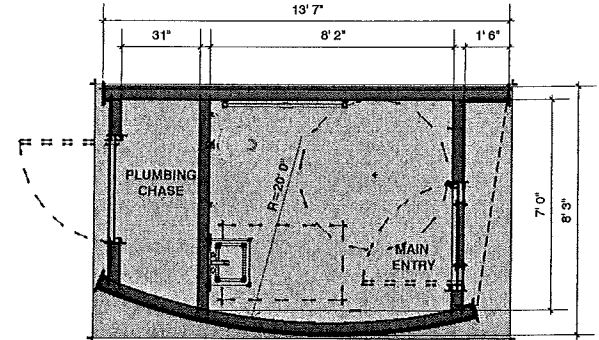


FLOOR PLAN - SINGLE OCCUPANCY - BASIC MODULE

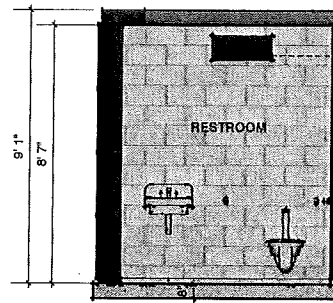


TRANSVERSE SECTION

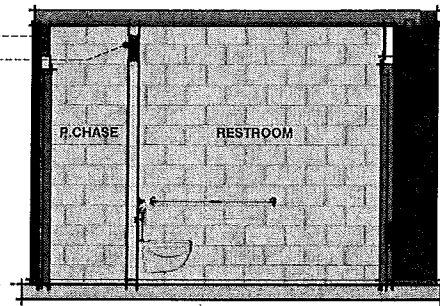


LONGITUDINAL SECTION

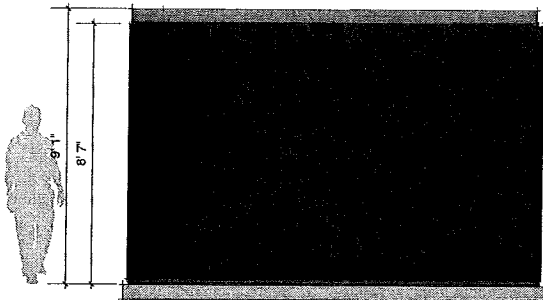


RIGHT ELEVATION

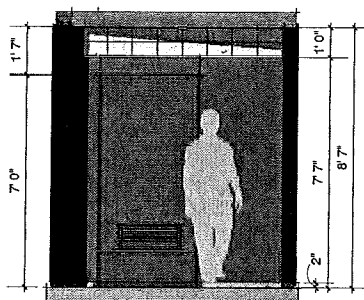

FRONT ELEVATION

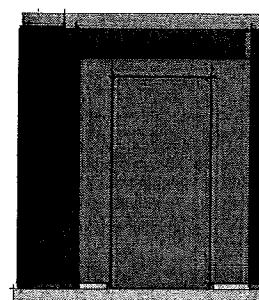


BACK ELEVATION

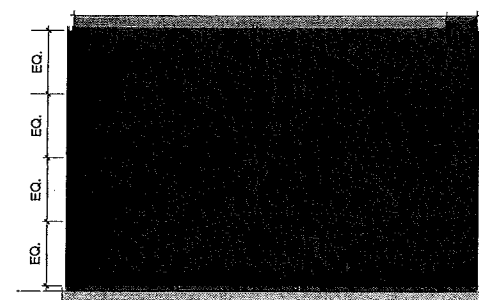


LEFT ELEVATION



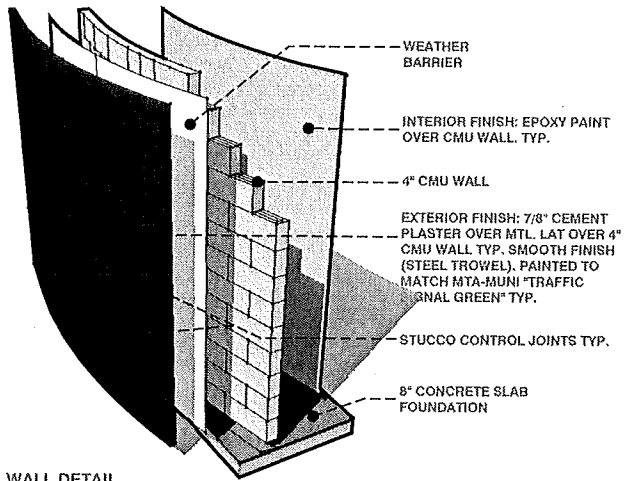


WALL DETAIL

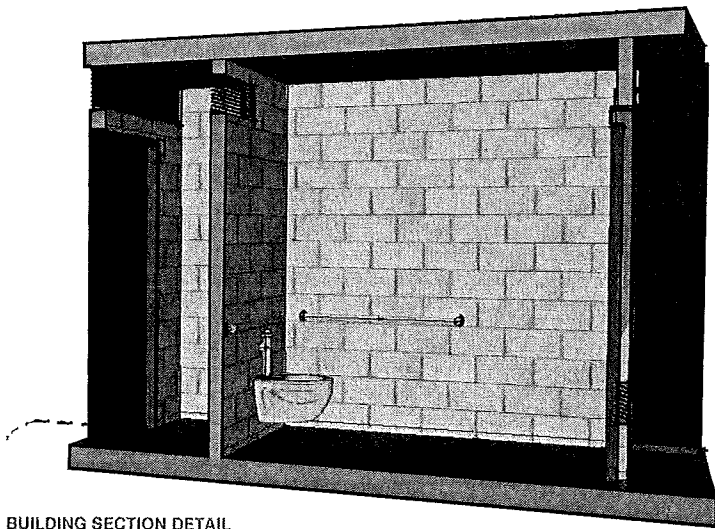


BUILDING SECTION DETAIL


DETAILS

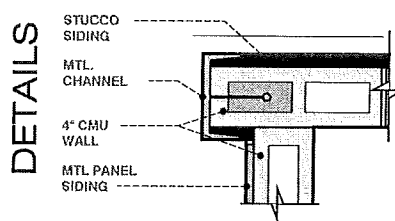

WALL DETAIL 1

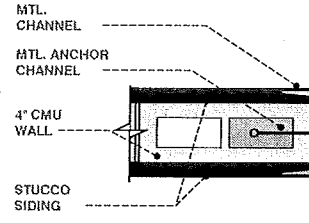


WALL DETAIL 2

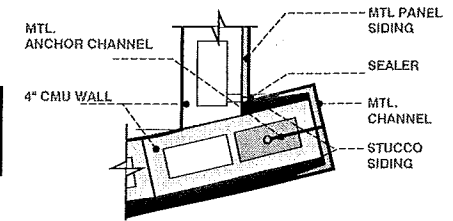

WALL DETAIL 3


DESIGN OPTION

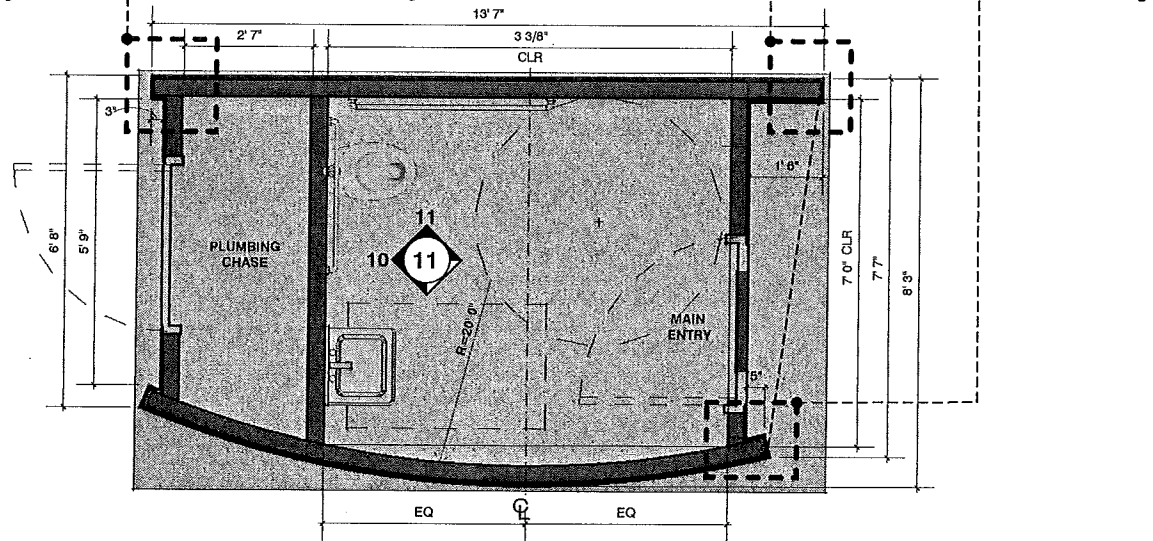

FLOOR PLAN - SINGLE OCCUPANCY - BASIC MODULE

DESIGN CRITERIA:  
TEMPORARY/ PREFABRICATED FACILITIES

WALLS: 4" CMU WALLS  
 EXTERIOR FINISH: 7/8" CEMENT PLASTER OVER MTL. LAT OVER 4" CMU WALL TYP. SMOOTH FINISH (STEEL TROWEL), PAINTED TO MATCH MTA-MUNI "TRAFFIC SIGNAL GREEN" W/ ANTIGRAFFITI CLEAR COATING TYP.  
 INTERIOR FINISH: EXPOSED CMU WALL WITH EPOXY PAINT TYP.  
 ROOF: BUILD UP ROOF/ FLUID APPLIED ROOFING (WATER PROOFING ROOFGUARD/SOLATEC TYP.)  
 DOORS: EXTERIOR METAL DOOR. PAINTED.  
 NATURAL ILLUMINATION: KALWALL SYSTEM WALL  
 VENTILATION: METAL LOUVERS (WALLS AND DOORS) & MECHANICAL EXHAUST FAN.  
 LIGHTING: INTERIOR-MOTION ACTIVADED LIGHT. EXTERIOR-RECESSED CEILING LIGHT.  
 FLOOR: EXPOSED CONCRETE.

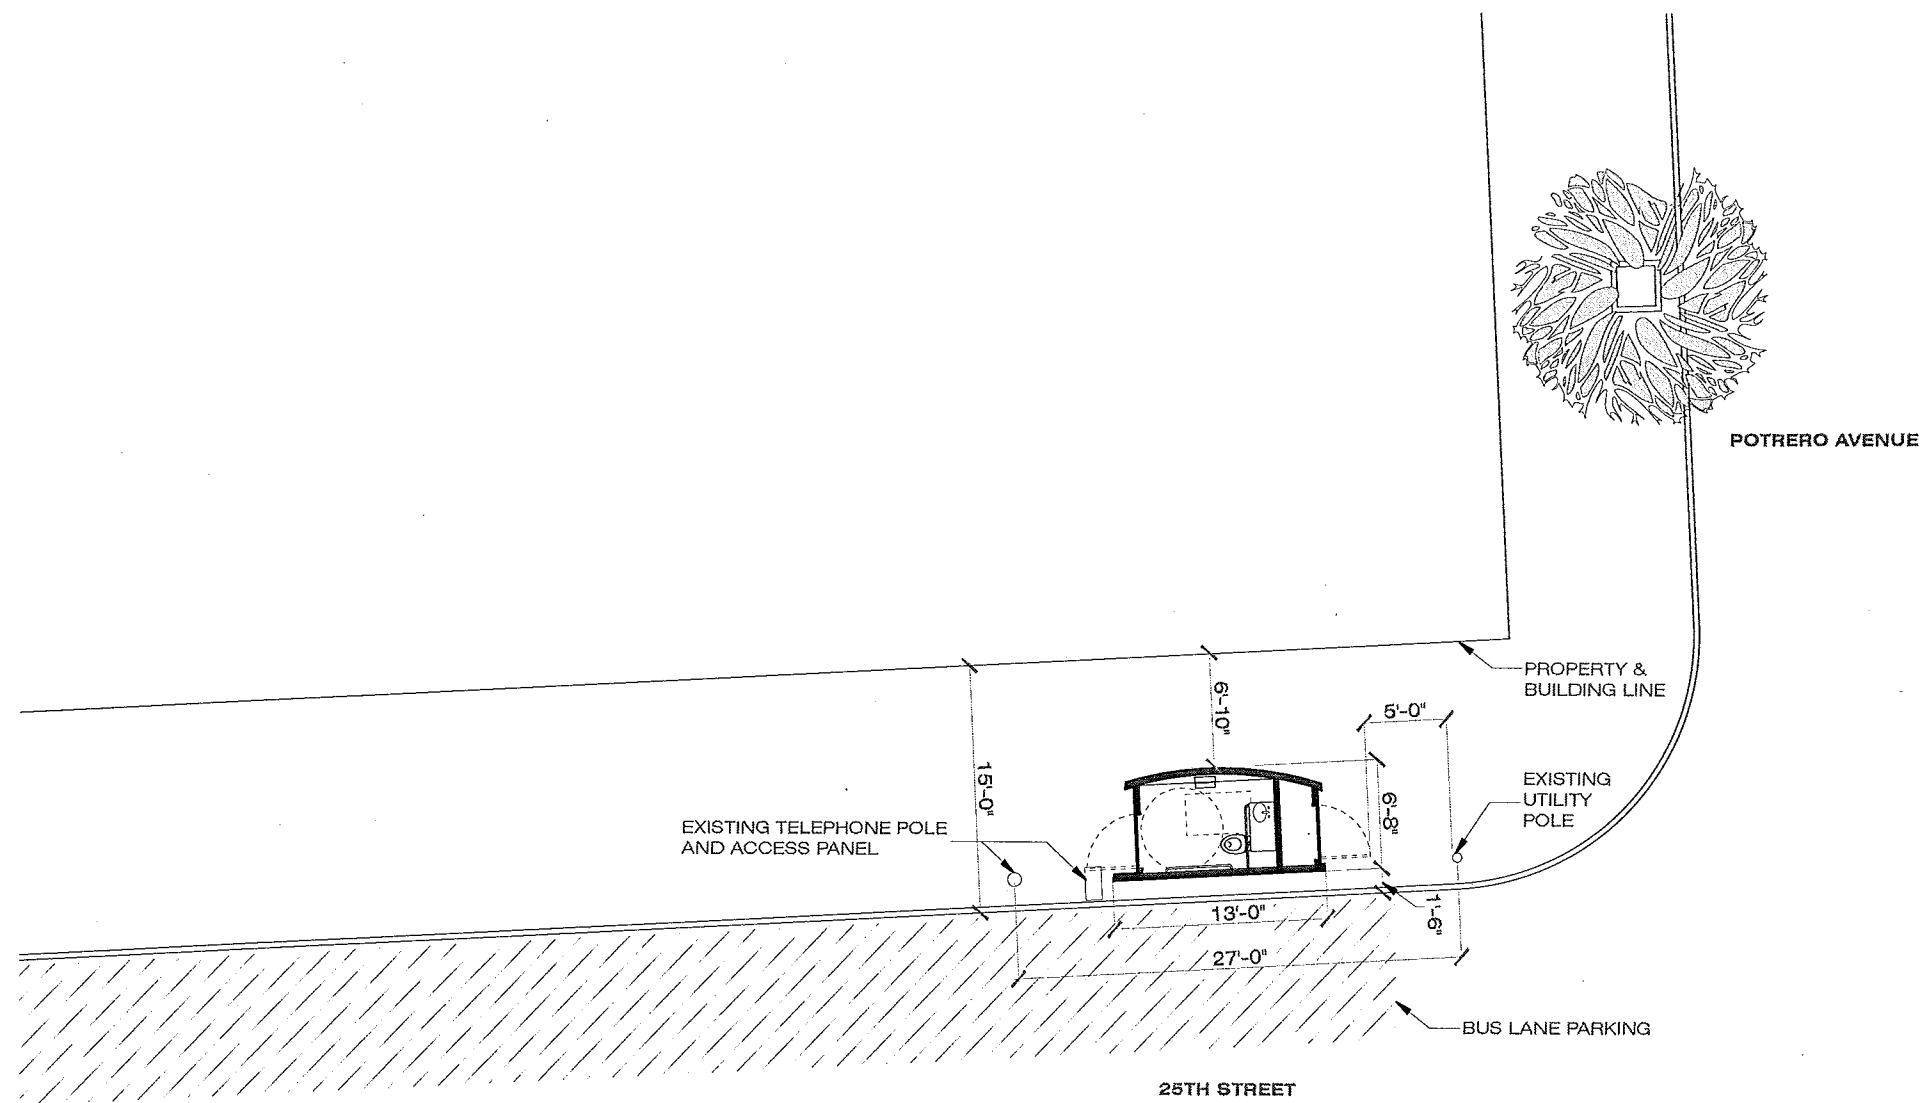

SITE PLAN - N.T.S. 