

UC Berkeley

Other Recent Work

Title

Are Shelters in Place?: Mapping the Distribution of Transit Amenities via a Bus-Stop Census of San Francisco

Permalink

<https://escholarship.org/uc/item/3qj1t495>

Journal

Journal of Public Transportation, 23(3)

Author

Moran, Marcel E.

Publication Date

2021-07-01

Peer reviewed

Are Shelters in Place?: Mapping the Distribution of
Transit Amenities via a Bus-Stop Census of San Francisco

Marcel E. Moran, Institute of Transportation Studies, University of California, Berkeley

July, 2021

Published in Journal of Public Transportation, Volume 23, Number 3

Are Shelters in Place?

Mapping the Distribution of Transit Amenities via a Bus-Stop Census of San Francisco

Abstract

Transit stops serve as crucial components of journeys for riders, but their condition is often left out of equity considerations. Two important empirical questions are what stop amenities, such as places to sit, clear signage, shelters for inclement weather, and unobstructed curbs are present, and how are they distributed across systems, which may reveal neighborhood or route-specific disparities. San Francisco, CA represents an ideal case for which to pursue this question, given it maintains a 'transit first' policy directive that mandates public space prioritize transit over private automobiles. An in-person census of 2,964 street-level bus stops was conducted over three months, which finds that a majority of stops lack both seating and shelter of any kind, that route signage varies widely in format and legibility, and that roughly one third of all stops are obstructed by on-street parking, rendering them difficult to use and exposing riders to oncoming traffic. Stops in the city's northern half are more likely to feature seating, shelter, and unobstructed curbs, whereas amenity "coldspots" nearly all lie within the city's southern half. Stop amenities also vary sharply by bus route, such that routes with the longest headways (and thus waiting times) provide on average the least seating, shelter, and clear curbs. These three amenities – seating, shelter, and unobstructed curbs – are also present to a greater degree in Census tracts with higher shares of white residents. This census demonstrates that equity evaluations of transit must include stop amenities, which are often overlooked, can undermine transit's attractiveness, and even compound long-standing imbalances in service quality for underserved communities. Furthermore, studies of this kind can inform where amenity upgrades should be prioritized, targeting those areas currently lacking in high-quality stops, and raising the minimum standard of stop amenities overall. Finally, given data collected in this census is almost entirely unavailable to riders within current trip-planning and wayfinding applications, this work raises the possibility of expanding transit-data standards to include amenity details.

Keywords: Transit, Equity, Buses, GIS

Introduction

Cities across the United States have set ambitious goals for increasing the share of trips which take place on transit, such as Boston (over 40% by 2030) and Portland (25% by 2035) (“Go Boston 2030,” 2017; “Transportation System Plan,” 2018). These targets relate to manifold objectives, including reducing congestion, as well as improving air-quality and lowering carbon emissions. Indeed, transit not only moves people more efficiently in terms of space on the road, but it also requires less energy per traveler (Barrero et al., 2008; Lowe et al., 2009; Hodges, 2010). Regardless of these potential benefits, transit ridership has been falling in nearly all U.S. cities over the last decade (Amin, 2018), and dropped precipitously during the COVID-19 pandemic (Hart, 2020). For transit systems to reverse these long and short-term trends, they must provide a level of service that competes with alternatives like personal automobiles, bicycles, and walking, but also ridehailing (such as Uber and Lyft), and micromobility (shared bikes and scooters). This is particularly relevant given a number of studies on emerging modes indicate a shift away from transit (Graehler, Jr. et al., 2018; Schaller, 2018).

Transit’s attractiveness generally stems from the spatial extent of routes, their frequency, and fare prices. However, features such as clear signage, places to sit, shelters to provide shade and protection from inclement weather, ease in boarding and exiting vehicles (e.g. unobstructed curbs), and screens providing real-time arrival estimates are also influential. Indeed, as Portland, Oregon’s TriMet agency puts it, “the public’s first impression of TriMet and its services is the bus stop” (Baldwin et al., 2010). Though, cursory use of many transit systems indicates that stop amenities are often inadequate (lack of clear signage, seating, shelters, etc.) and inconsistently distributed (the number of amenities varies from stop to stop). Indeed, U.S. media outlets have held contests for ‘sorriest bus stops’ and made calls for ‘worst bus stop signs,’ with entrants showing stops located perilously close to high-speed arteries, framed in by concrete barriers, and lacking legible signage of any kind (Schmitt, 2018; Bliss, 2019). Beyond poking fun at such facilities, these articles highlight a notable gap in the transit literature: comprehensive analyses of stop amenities. Such data could shed light on a number of pertinent questions, particularly: how have resources been divided among routes and neighborhoods in terms of transit stops? Given the widespread goals of increasing transit ridership as well as improving the travel experience for those already riding, the paucity of research on stop amenities stands out.

One approach to fill this gap is to conduct a census: in-person visits to each stop in a given transit system in order to catalog the presence of seating, signage, curb obstructions, shelters, and other amenities. San Francisco, CA operates a fixed-route transit system (managed by the San Francisco Municipal Transportation Agency, or SFMTA) that includes buses, light-rail, cable cars, and street cars. San Francisco is guided by a ‘Transit-First’ policy which stipulates that: “travel by public transit, by bicycle and on foot must be an attractive alternative to travel by private automobile,” and that “decisions regarding the use of limited public street and sidewalk space shall encourage the use of public rights of way by pedestrians, bicyclists, and public transit” (“Transit-First Policy,” 2007). A census of San Francisco’s bus stops is a direct way to evaluate if these directives are reflected in transit infrastructure. The city also stands out generally due to its innovative transportation policies, including one of the country’s first dynamic parking-pricing schemes (Pierce and Shoup, 2013), pilot programs for shared bikes and scooters (Moran, 2021), a streamlined planning process for bicycle and bus lanes (Swan,

2019), and the banning of private automobiles from its main thoroughfare, Market Street (Fitzgerald Rodriguez, 2020). Given leadership on these fronts, it is of interest if San Francisco provides adequate bus-stop amenities, and if it does so consistently citywide.

This paper proceeds by reviewing academic studies of bus stops, including those which connect stop amenities to rider experience and changes in travel behavior. It then details the methods of this census, including which amenities were cataloged, and what other datasets (including route headways) were ushered to put the findings into context. The results section covers the low levels of seating and shelter present across bus stops citywide, the roughly one third of stops which are obstructed by on-street parking, and how these relate to San Francisco's geography and sociodemographics. Stop amenities are analyzed by route and headway category, which display wide variation. Finally, the conclusion section draws upon the findings of the census for policy recommendations for other transit systems grappling with inadequate and inconsistent stop amenities.

Literature Review

Scholars have analyzed bus stops in a number of different ways: critiques of stop design and quality, surveys of riders on stop preferences, testing of effects of stop amenities on ridership, and investigations of how transit agencies make decisions regarding stop investment and prioritization. As to the first category; there is evidence that the orientation of bus-shelter doors (either facing toward or away from the roadway) influence pollution riders are exposed to (Moore et al., 2012), and that many stops lack nearby crosswalks (Pulugurtha and Vanapalli, 2008; Hosford et al., 2020). Loukaitou-Sideris (1999) closely observed a small number of bus stops in Los Angeles to determine if certain features lend themselves to crime. Her study found that specific attributes likely do so, including bus shelters which are closed in by walls to the degree that the view of the interior space from the street was blocked. Corazza and Favaretto (2019) usher a great number of attributes about roughly 200 bus stops in a single district of Rome (including trash cans, street lights, and bollards, among others), which serves in part as inspiration this study.

As to surveys, the Federal Transit Administration sponsored a project that surveyed bus riders in four cities on stop design, finding highest preference for those with pitched roofs, one side fully open to the elements, and clear walls over opaque surfaces (Lusk, 2001). Another survey, based in the Twin-Cities region of Minnesota found that respondents perceived waiting times were shorter if stops had benches and shelters (Fan et al., 2016), and a subsequent study from the same area determined that adjacent trees also decreased perceived waiting times (Lagune-Reutler et al., 2016). These complement research which finds that providing real-time scheduling for arrivals can also make waiting less frustrating (Ferris et al., 2010; Watkins et al., 2011; Woetzel et al., 2018), and even improve riders' sense of safety (Abenzoza et al., 2018). In addition, rider surveys have suggested that perceptions of bus-stop comfort can also factor into the decision to switch to a car (Han et al., 2018).

In addition to stated preferences, two studies have linked stop quality to rider behavior. In Salt Lake City, researchers documented that the installation of seating, shelters, and sidewalks correlated with increases in stop-level ridership and decreases in paratransit-service demand (Kim et al., 2018).

Likewise, bus stops in Chicago which had real-time arrival screens installed were associated with increased ridership, when comparing routes which did and did not receive the new hardware (Tang and Thakuriah, 2012).

It is important to consider how transit agencies make decisions regarding stop amenities. One report on the topic concluded that “in most instances, the estimated number of passenger boardings has the greatest influence” (Fitzpatrick et al., 1996). For example, the WMATA system’s “Guidelines: Design and Placement of Transit Stops” calls for a bus shelter to be present based on stop-specific ridership – in this case whether or not there are at least 50 boardings per day (2009). This logic is echoed by numerous other agencies, including Rogue Valley Transportation District in Oregon (“Bus Stop Design & Planning Guide,” 2011), OmniTrans in Southern California (Parsons and Gruen, 2013), and GCRTA in the Cleveland, OH area (Feke et al., 2018). However, one obvious pitfall of this approach is that it can become a *self-fulfilling prophecy*, in that low-amenity stops may actively deter ridership, which means they will never qualify for upgrades. Second, this logic means that riders at more popular stops will inherently be provided better facilities than those who live or commute to less-popular stations.

There is also evidence that factors beyond ridership drive the distribution of stop amenities. Indeed, the Star Tribune in Minnesota compared bus boardings to stop amenities using publicly-released data (Roper, 2014), and identified hundreds of stops lacking a shelter of any kind even though they qualified for amenities given ridership benchmarks. At the same time, many other stops had shelters even though ridership was far lower. Moreover, a study of bus stops in Los Angeles indicated that the primary determinant of where shelters were present was the revenue-generating potential of shelter advertisements (Law and Taylor, 2001). This finding has particular importance for San Francisco; SFMTA at one point contracted out shelter construction to an advertising firm (Roth, 2009), an agreement which left it up to the private vendor to not only upgrade existing shelters, but install new ones as well (Gordon, 2007). Though, SFMTA’s press release announcing the contract noted that “SFMTA will have approval over the construction schedule to ensure that priorities such as volume of passenger boardings and distribution throughout the city are followed” indicating support for linking ridership and stop investment.

Beyond these analyses, transit agencies, metropolitan planning organizations, design firms, and nonprofits have also produced resources on how transit stops can be improved, and have examined their own facilities. These measures emphasize stop siting, providing riders with a way to submit feedback regarding maintenance issues, maximizing seating along crowded sidewalks, incorporating lighting and heating, and modifying curbs with bus-stop bulbs (Robson and Piczenik, 2009; NACTO, 2016; Farrington and Schwartz, 2017; Buchanan and Hovenkotter, 2018; Colosi et al., 2018). Beyond guidance, a small number of transit agencies have released audits on their own bus stops, such as those focused on accessibility (Finch, 2013; “Bus Stop Safety and Accessibility Study,” 2018; “Space Coast Area Transit,” 2018), or how amenities vary by which jurisdiction maintains them (“Metro Transit Bus Stop Amenities Study,” 2018). In the Atlanta Region, several organizations have partnered for “Operation Bus Stop Census,” which seeks to crowdsource information on stop quality across the MARTA system by releasing a free smartphone application anyone can use to submit information (Clanton, 2020).

Outside of stops, there is also ample evidence that transit service is inequitably provided, both in terms of mode and location. Golub and colleagues (2013) detail the history of transportation funding in Northern California's East Bay, which was biased in terms of suburban rail compared to urban buses, the latter of which served a more-diverse and low-income population (see also Attoh, 2019). This pattern of underinvestment in bus transit has been mirrored elsewhere, including Los Angeles, which involved a successful legal fight over inadequate funding (Grengs, 2007). Along with spatial and modal disparities, there are also specific populations who struggle with transit infrastructure generally and stops in particular, such as people with vision impairments (Azenkot et al., 2011). As one study notes:

One specific challenge for blind and low vision bus riders is locating and verifying bus stop locations, particularly in new or unfamiliar areas. They often search for physical landmarks such as the bus shelter, benches, or transit sign as a cue that they have reached the stop, but the design and location of the stop relative to the intersection are frequently quite variable.
(Campbell, 2014)

People with other disabilities also consistently experience difficulty in navigating transit systems, including stops (Wu et al., 2011), which can have significant consequences in terms of social exclusion (Stanley et al., 2011; Aarhaug and Elvebakk, 2015).

While there demonstrably are differences in bus stop quality across space, and issues with specific populations using them, a clear definition of equity is required regarding the distribution of bus-stop amenities. One approach, in line with a utilitarian conception of equity (Di Ciommo and Shiftan, 2017), would entail that the highest number of riders receive some amount of benefit (in the form of stop amenities) given existing budget constraints. This might result in stop amenities being concentrated *only* along the bus routes with high ridership, given it could maximize the number of riders using amenities. Though, as noted above, the spatial distribution of ridership may be in part tied to the presence of these very amenities, meaning that stop-investment patterns can themselves shape ridership.

In contrast, a conception of equity drawn from the work of Rawls (specifically his 'difference principle'), would favor distributing benefits such that those with the least resources receive a higher share than those better off to begin with (Rawls, 1999; Martens, 2016; Pereira et al., 2017). In the context of bus stops, this definition of equity would prioritize that amenities be present at stops in low-income and/or minority neighborhoods, and not primarily determined by ridership alone. Third, the 'social minimum' principle, advanced by Waldron (1986) and others (Weithman, 1995), focuses on the *minimum standard* of the distribution of goods. Applied here, that would entail that all stops in the system at least meet some established criteria. For example, that each bus stop has legible route signage, a curb unobstructed by parked automobiles, and at least seating for a single waiting rider.

Both of these latter approaches – priority for underserved neighborhoods, and bringing up stops to a minimum standard– would benefit riders most in need (regardless of what part of the bus system they use), and encourage more ridership. Of course, no transit agency has an unlimited budget, and so decisions regarding system investment must always be made with fiscal constraints in mind. This relates to both Rawls' difference principle and the interest for a minimum standard across stops. Indeed, given not every stop can be upgraded at once, these principles suggest that stop improvements should occur

first in the areas most in need, which would both raise more stops to a minimum standard, and in doing so benefit the least well-off riders.

Overall, scholarship suggests that bus-stop amenities influence ridership, that a number of transit agencies are mindful of the need to improve their stops, and that such improvements could benefit riders who frequently face challenges with transit journeys. However, there are as of yet no comprehensive stop censuses, or spatial analysis of such findings across an entire city. Thus, the opportunity exists to conduct a bus-stop census, which can generate both locally-salient findings as to the distribution of stop amenities, and also insights for agencies elsewhere about how such data relate to equity goals.

Methods

The primary method of this census is in-person visits to every street-level bus stop in San Francisco managed by SFMTA. This does not include the Bay Area Rapid Transit (BART) or Caltrain systems (which are rail), nor does it include SFMTA stops for cable cars, street cars, or light-rail. However, this census does include stops which are shared among SFMTA's different modes for those which explicitly serve a bus route. This census also excludes bus stops that exclusively serve other systems, such as SamTrans, AC Transit, and Golden Gate Transit, which are centered in other counties.

Before this census began, attempts at obtaining detailed stop-amenity information from SFMTA were made. This included queries within SFMTA's website, and San Francisco's open-data portal, as well as email correspondence with SFMTA staff. These steps uncovered a single geospatial dataset which lists the location of each bus stop, though it only includes one binary amenity attribute: the presence or absence of a shelter. While this dataset is a useful starting point, it is reductive in terms of a stop's full condition, leaving out signage, seating, and curb status, among others. Likewise, SFMTA's general transit feed specification (GTFS) – which lists every stop system wide and is used by trip-planning applications – contains no amenity information. Headways (i.e. frequency) by route were drawn from SFMTA's system map (dated "Winter/Spring 2019"), which predates COVID-related service cuts (Cassidy, 2020). For buses, there are three headway categories: service every 10 minutes or less, service every 10-20 minutes, and service every 20-30 minutes.

This census took place over the months of May, June, and July 2020. Throughout the data-collection process, SFMTA records (updated as of April, 2020) on the location of every bus stop were referenced in order to ensure all were visited in person (outside of those within active-construction zones). The presence of the following amenities was recorded at each stop:

- Route Signage (see **Figure 1**)
 - Metal sign;
 - Paint on a metal pole;
 - Paint on a telephone pole;
 - Paint on the pavement; and
 - Marking on bus shelter;
- Shelter (e.g. roof of some kind);

- Seating;
- Electronic ETA Screen (and if present, if such screen is operating);
- Stop ID for the NextBus system (generally via stickers);
- Route/System Map; and
- Unobstructed Curb (vs. those blocked by on-street parking)

A photograph of each bus stop was also taken. While determining if most amenities were present was straightforward, evaluating the status of the curb requires more explanation. In San Francisco, curbs running along bus stops are marked in a number of different ways, including with large stencil-painted lettering which read “BUS STOP,” as well as by curbs painted the color red, or metal signs which read “No Parking.” Thus, determining whether or not a specific bus stop was obstructed by parking was not guided by the presence or absence of automobiles parked in front of it, but whether or not any of these marking types (lettering, curb coloring, or specific no-parking signage) was present. If none of these were visible (i.e. the curb was marked like any other) then it was cataloged as a parking-obstructed stop. There were also other ways to confirm this, such as signs indicating when parking was allowed, or if parking meters were present. In addition, route signage was only recorded as being present at stops if markings (be they stickers, signs, or paint) were legible in person.

FIGURE 1. Route signage examples of bus stops in San Francisco, CA, including (clockwise from top left): metal signs, paint on metal poles, shelter markings, paint on pavement, and paint on telephone poles




Beyond these specific amenities, in-person inspection of all bus stops allowed for more-qualitative observations as well, including signage legibility, sidewalk quality, how obstructed curbs varied by parking layout, and how different sidewalk designs influenced stop functionality.

Though a census of this kind could perhaps be conducted remotely, such as by employing “street view” imagery from Google Maps or similar services, there are several advantages to the in-person method undertaken here. First, street view varies in terms of image quality, and level of obstruction from vehicles, which makes cataloging stop amenities difficult. Indeed, the resolution and angles of street view rarely allow for detection of NextBus ID stickers, electronic ETA signs (and if they are functioning), or pavement markings. Second, street view is not uniform in terms of timing across a city such as San Francisco. While major streets are captured by street-view vehicles at least once a year, images from less-central streets – many of which contain bus stops – can be several years old. Thus, an in-person census conducted over a relatively short period of time ensures that data are not only accurate but also temporally consistent.

Results

Between May and July, 2020, 2,964 SFMTA street-level bus stops were visited across San Francisco, with all present amenities cataloged (see **Figure 2**). In terms of seating, 34% of stops included seating of some kind, be it chairs or benches of varying materials and types. Similarly, 31% of stops featured shelters. Legible route signage of some kind was present at 89% of stops, with paint on metal street poles as the most common type (present at 41% of stops), followed by shelter markings (23%), paint on pavement (19%), metal signs (18%), and paint on telephone poles (7%). There were 516 stops (19% of all stops) which featured more than one type of legible route signage, such as both paint on the pavement and a shelter marking. A NextBus ID was posted at 81% of all stops, which came in various formats, including stickers, as a component of metal signs, paint on the pavement, and a few stops with hand-scrawled numbers. Working electronic screens displaying ETA information were present at 21% of stops, and an additional 2% of stops had ETA screens which were not functioning. Route maps were present at 30% of stops, and almost always as a component of bus shelters.

FIGURE 2. Bar chart of amenities across 2,964 SFMTA bus stops

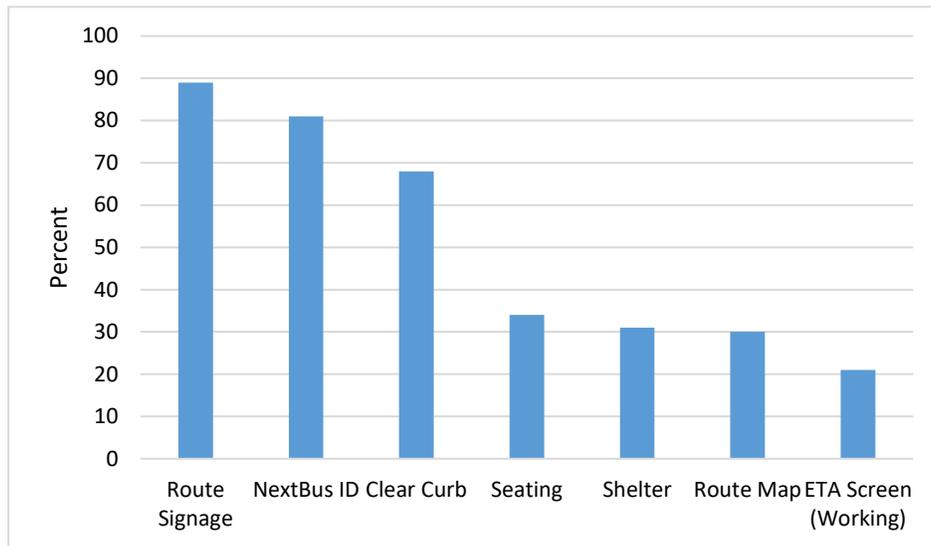

Curbs were obstructed by on-street parking at 32% of stops, meaning there was not enough designated curb space (often called a “dedicated bus zone”) for a bus to pull up, which forces riders to step into the street to board, and often navigate through parked cars (see **Figure 3**).

FIGURE 3. Bus stops in San Francisco where on-street parking obstructs riders from entering and exiting the bus, both at those with and without shelters



All bus stops visited during the census had their geographic locations recorded based on GPS coordinates from ESRI’s Survey123 smartphone application run on an iPhone 7, which is generally accurate within 10 meters of true positions, and allows for data exporting into spatial-analysis software (Lamoureux and Fast, 2019; Merry and Bettinger, 2019). When limiting the analysis to seating, several visible patterns emerge, including a higher share of stops featuring seating in the city’s northern half (see **Figure 4a**). It is also evident that Bayview/Hunters Point, a historic African-American neighborhood in the southeast corner of the city, contains very few stops with seating at all. Using the municipally-

designated geographical center of San Francisco (Rubenstein, 2016), it is possible to quantify the distribution of amenities by half. Indeed, among bus stops in the city's northern half, 45% provide seating, compared to just 22% in the southern half. That pattern is nearly identical for shelters: 42% of stops in the northern half feature shelters, compared to 22% in the southern half. In comparison, the differences in amenities between the eastern and western halves of the city are far smaller; seating is provided at the same percentage of stops (34%), and shelter is provided at 32% of stops in the eastern half versus 30% in the western half.

A "hotspot" analysis of these amenities further illustrates this high-level geographic pattern. The Getis-Ord G_i^* test detects where stops with similar values (in this case, those with or without a given amenity) cluster together (Songchitruksa and Zeng, 2010). Applied to bus-stop data, clusters of stops providing seating are primarily present in the city's northern half, including its central-business district in the northeast quadrant and residential neighborhoods running west. In comparison, seating "coldspots" – clusters of stops lacking seating – nearly all lie in the city's southern half (see **Figure 5a**).

Mapping bus stops by curb type (clear vs. obstructed) displays a similar picture, in that stops clear of on-street parking are present to a far greater degree in the city's northern half (80%) than its southern half (53%) (see **Figure 4b**). Likewise, these differences were less pronounced in the eastern half vs. western half comparison (68% of stops with clear curbs in the eastern half vs. 65% in the western half). The Getis-Ord G_i^* test similarly indicates that clear curbs hotspots sit almost entirely within the city's northern half, notwithstanding a small hotspot also present in the southwest quadrant within a large private housing development (see **Figure 5b**). In addition, nearly every curb "coldspot" occurs within the city's southern half, including a broad portion of the southeast quadrant.

Beyond these north-south and east-west analyses, U.S. Census and bus-headway data were also integrated into spatial analyses in order to consider how amenities vary by route frequency and race. When broken down by Census tract (based on 2019 American Community Survey data), bus stops in tracts with a higher than average share of white residents are more likely to feature seating (37%), shelter (34%), and clear curbs (71%), than to those in tracts with a higher than average share of people of color (31%), (29%), and (62%), respectively. Indeed, for every one percentage increase in a tract's white residents, the odds that a given bus stop features seating increases 0.9%, 0.8% for shelters, and 1% for clear curbs (estimated from a logistic regression). In contrast, this relationship was not evident in terms of income; tracts household incomes both above and below the city's median figure (\$112,449 as of 2019) were equivalent in terms of the likelihood stops feature seating, shelter, and unobstructed curbs. Lastly, the effect of a Census tract's density was different from both these of previous categories, in that those with lower-than average densities had stops 11-12% less likely to feature seating and shelter, but only 4% less likely to provide clear curbs.

Given the evidence of amenities following some corridor patterns from the spatial analyses (such as consistent seating), each bus route comprising the SFMTA system was analyzed in terms of what percentage of its stops include a given amenity. The provision of amenities varies significantly across routes: seating ranges from 10% of stops on some routes to 75% on others, shelter likewise varies from 5% to 76%, clear curbs from 16% to 100%, route maps from 0% to 74%, functioning ETA screens from 0% to 54%, route signage from 78% to 100%, and NextBus IDs from 66% to 100% (see **Table 2**, appendix).

Figure 4a: Map of bus stops in San Francisco, shaded by the presence of seating



Figure 4b: Map of bus stops in San Francisco, shaded by the presence of curb status



Figure 5a: Hotspot and Coldspot analysis (Getis-Ord G_i^*) for bus-stop seating


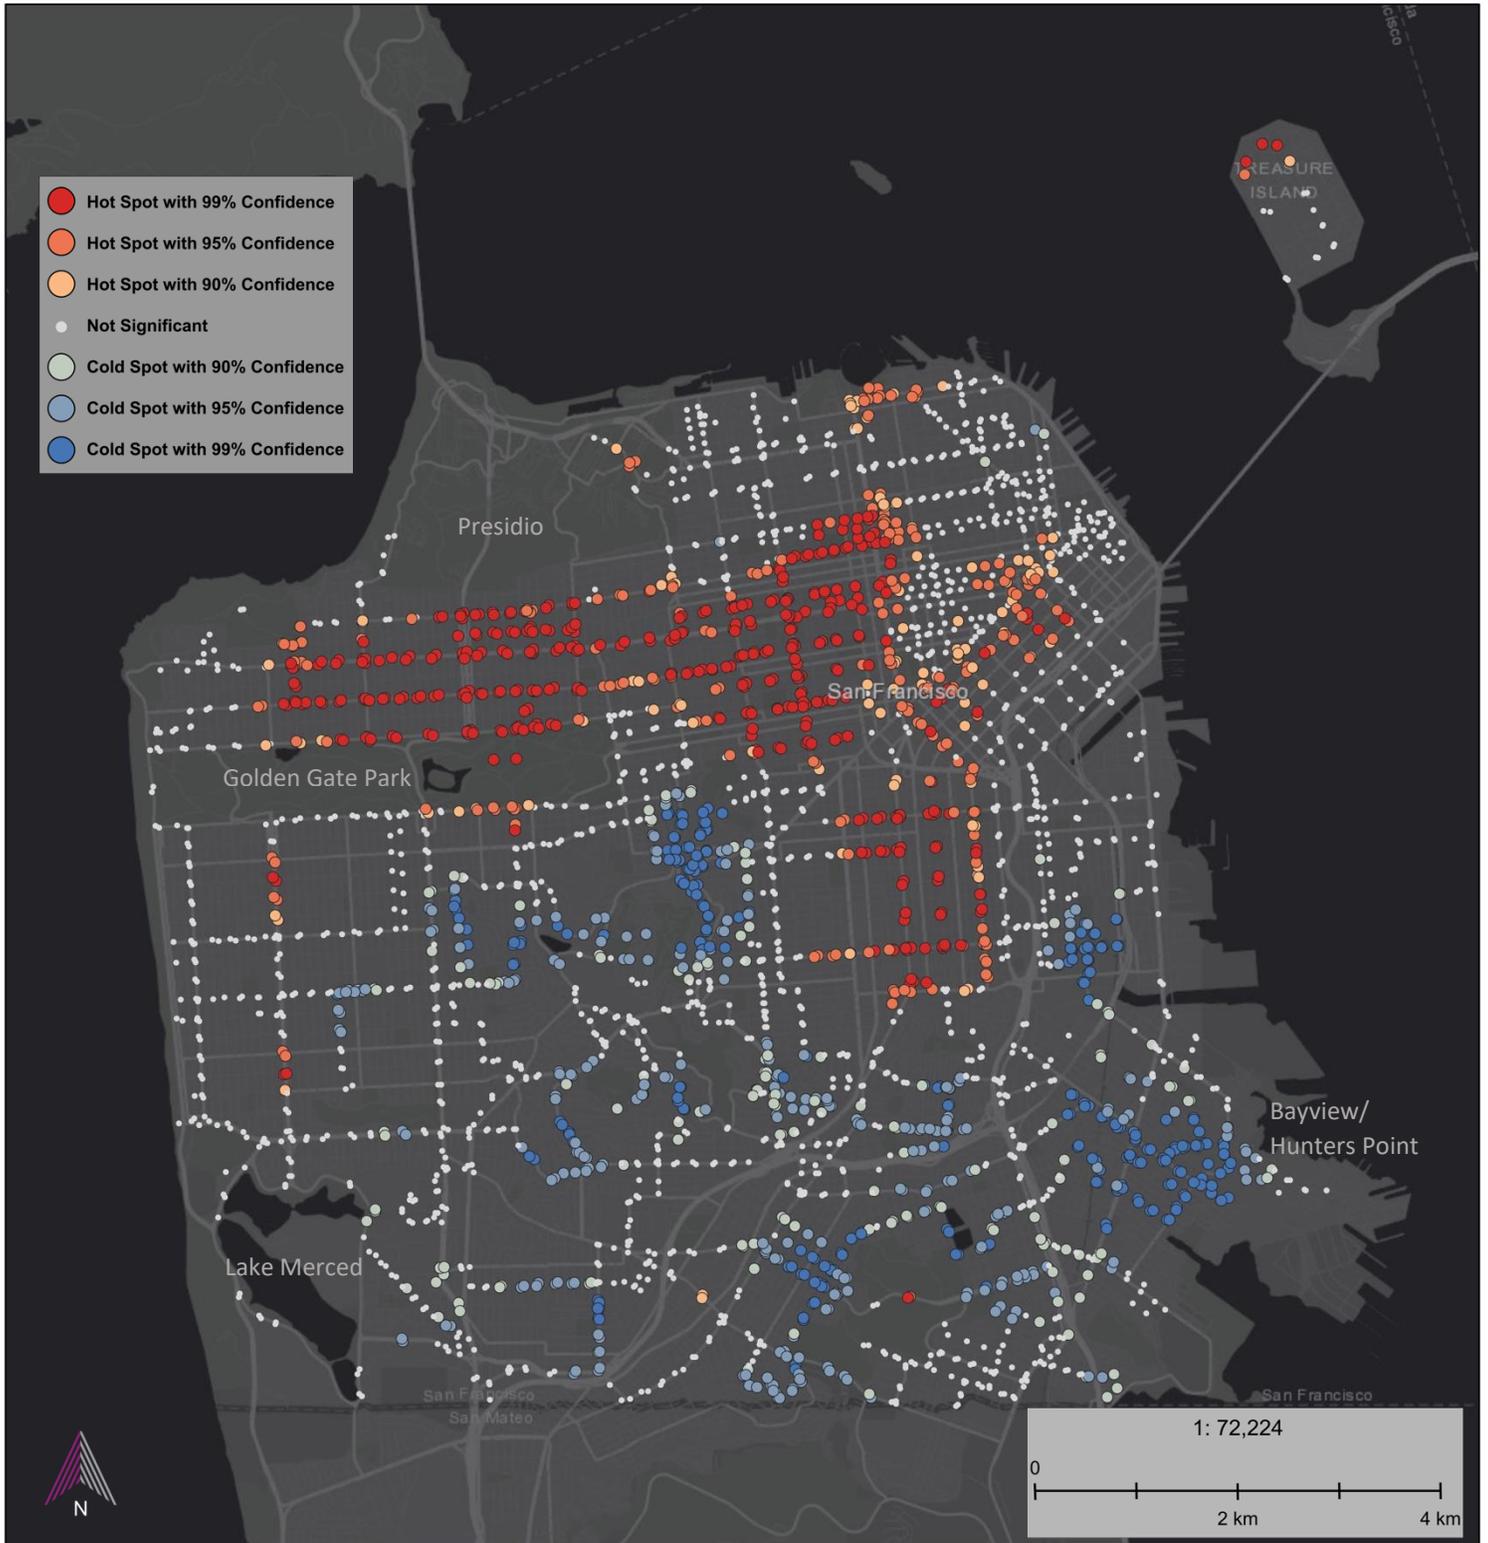


Figure 5b: Hotspot and Coldspot Analysis (Getis-Ord G_i^*) for bus-stop curb status

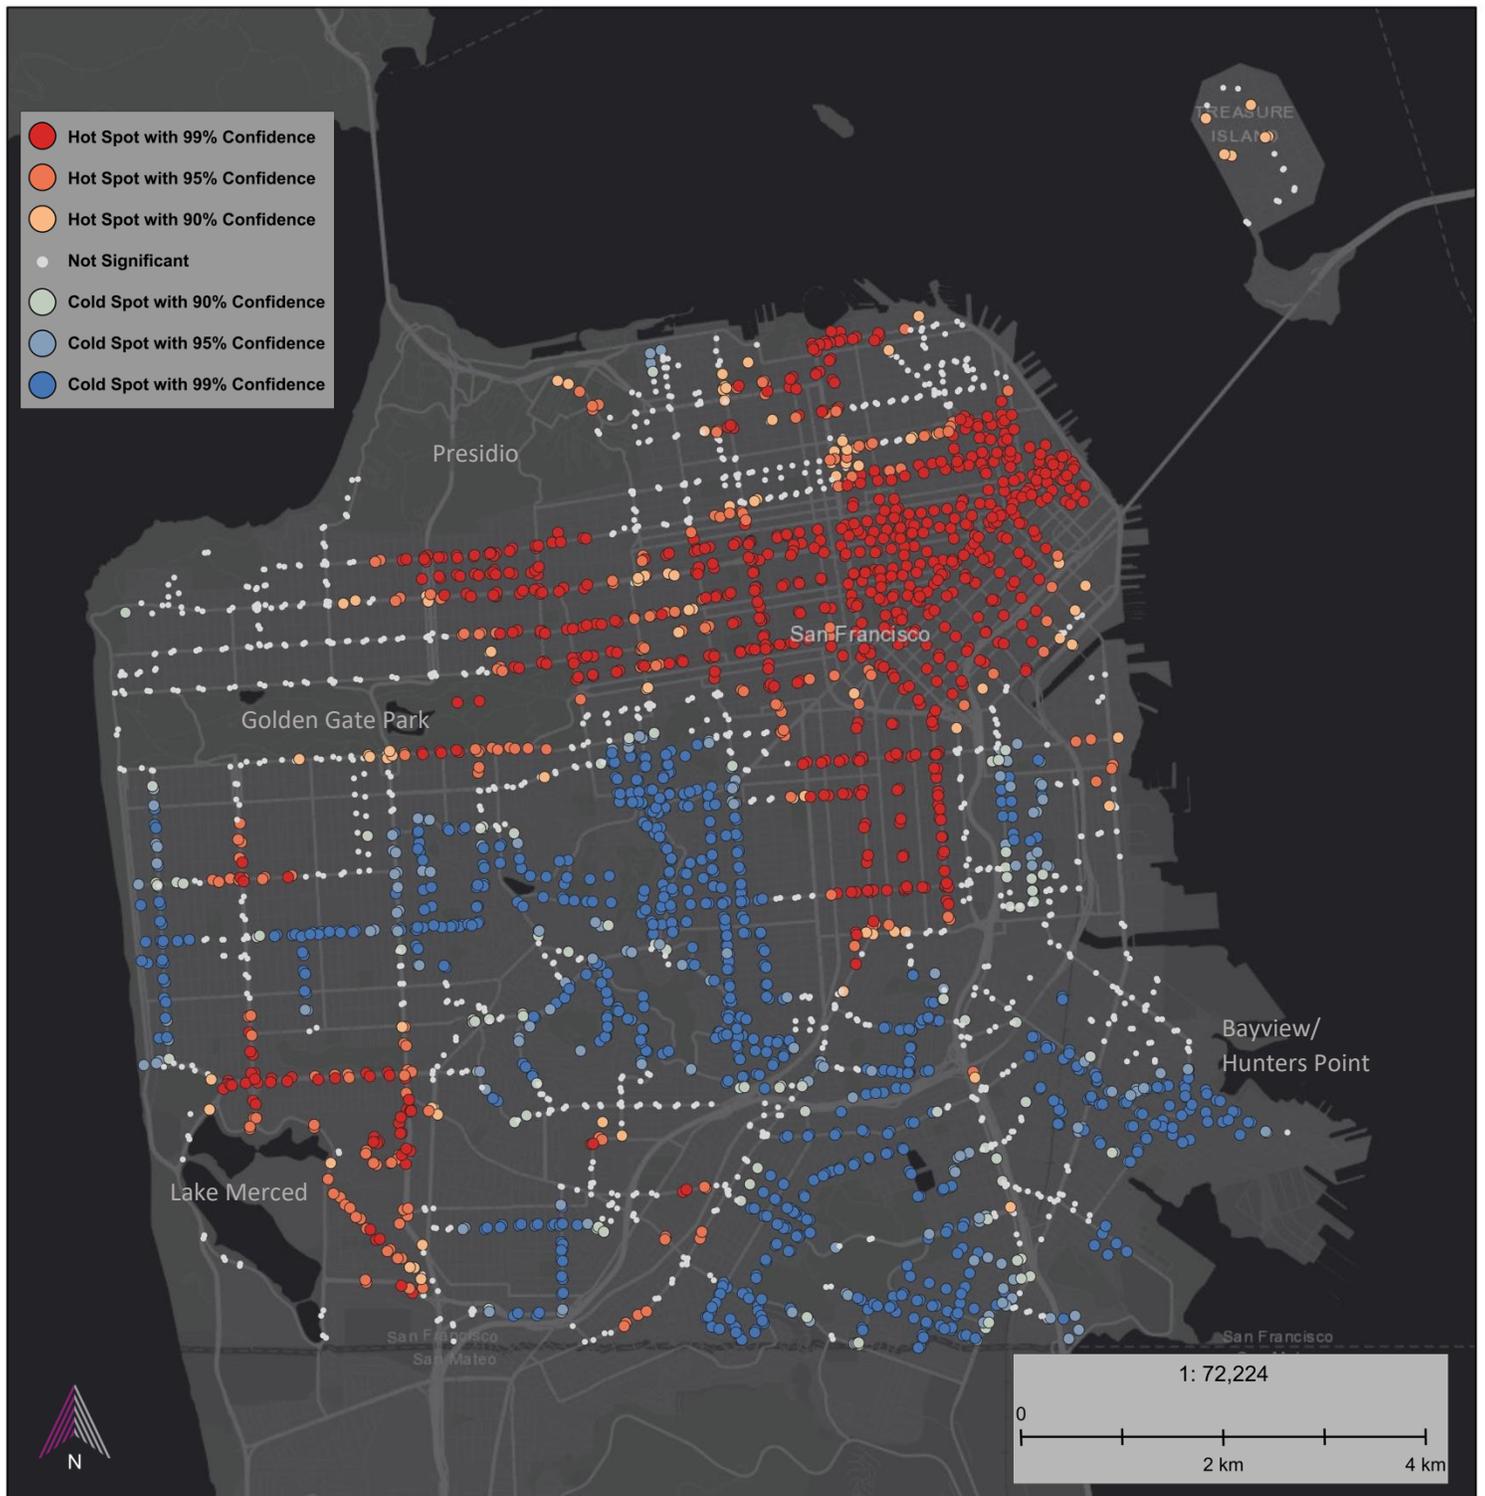

When divided into three headway categories, routes with the most-frequent service (headways of 10 minutes or less) had the highest share of stops with seating (51%), shelters (51%), and clear curbs (88%). Routes with the second-most frequent service (headways between 10 and 20 minutes) had a lower percentage of stops with seating (40%), shelters (36%), and clear curbs (72%). Finally, those routes with the least-frequent service (headways between 20 and 30 minutes) had the lowest percentage of stops with seating (17%), shelters (15%), and clear curbs (44%).

Importantly, the variation in route frequency across San Francisco may be contributing to the geographic patterns of stop amenities. Indeed, of the stops in the northern half of the city, 45% are served by the most-frequent routes, 44% are served by the second-most frequent routes, and just 11% are served by the least-frequent routes. This represents a far-higher share of stops served by more-frequent routes than those stops in the southern half, where 16% are served by the most-frequent routes, 39% are served by the second-most frequent routes, and 45% are served by the least-frequent routes. This raises the question of if the north-south amenity disparities can be explained by the geographic differences in route frequency. A mediation analysis determined that differences in route frequency explain approximately 40% of the effect of location (north vs. south) on the presence of seating, which means that 60% of the geographic effect documented is *unexplained* by route frequency. This finding merits further analysis, including considering other potentially-relevant sociodemographic, transit-service, and land-use variables, which are addressed in the discussion section.

Confirmed by observations during the census, there is a clear inter-relatedness between seating, shelters, route maps, and ETA screens, which are generally either all present at a stop or all absent (see **Table 1**). For example, for those stops with shelters, 98% of them also provide seating. That group of amenities has a less strong relationship to unobstructed curbs and route signage, for example, if a curb is clear there is only a 47% chance the stop also features seating.

TABLE 1. Stop Amenity Inter-relatedness. ETA Screens are counted only for those which are functional

	Seating	Route Signage	Shelter	Clear Curb	NextBus ID	Route Map	ETA Screen
If Seating is present	-	85%	90%	92%	90%	88%	62%
If Route Signage is present	32%	-	29%	66%	87%	28%	20%
If Shelter is present	98%	83%	-	85%	91%	94%	67%
If Curb is Clear	47%	88%	43%	-	83%	42%	29%
If NextBus ID is present	37%	95%	35%	68%	-	34%	24%
If Route Map is present	99%	83%	98%	93%	91%	-	70%
If ETA Screen is present	100%	82%	99%	92%	93%	99%	-

In terms of qualitative observations made during the course of the census, first, many stickers on bus shelters, intended to alert riders as to which route a stop was served by, were worn out from the sun and illegible (see **Figure 6**). Second, the placement of NextBus ID stickers was far from uniform; many were posted very high up on metal or telephone poles (making them difficult to read), and others were obstructed by screws and bolts. Signage painted onto wooden telephone poles was by far the most challenging to read. Pavement paint was worn in many places to the degree that its markings were illegible. Pavement paint was also often obscured by parked cars, which can make it difficult to locate such stops if no other signage is present. To this point, 51% of the stops marked solely with pavement paint had parking-obstructed curbs (123 of 242 total), meaning that they are difficult for riders to locate. As noted in the methods section, only the presence of *legible* route signage were recorded during the census.

FIGURE 6. Examples (clockwise from top left) of shelter markings worn out from the sun, obscured NextBus ID stickers, telephone poles with difficult-to-read lettering, and worn out pavement paint



There were also aspects of sidewalks which influence stop quality. This includes sidewalk width and evenness. Indeed, very thin sidewalks – barely allowing for two people walking in opposite directions to pass each other – entails that someone waiting for a bus likely feels in the way of pedestrians and may instead wait on the street. In addition, some higher-income neighborhoods maintain a sidewalk design which leaves bus riders little room to wait. In these locations, stretches of vegetation (grass, shrubs,

hedges) between the sidewalk and the road (known as a “planting strip”) entail that riders must either wade through that area to board or be visible to arriving buses, or wait in the street. These types of issues likely render such stops non-functional for many riders with mobility impairments, large items such as strollers, and/or safety concerns (see **Figure 7**).

FIGURE 7. Examples of stops with accessibility issues, including (clockwise from top left) those which lack sidewalks, are fenced in by guardrails, are obstructed by perpendicular parking, and are blocked by dense vegetation



Discussion

Equity in transport must not only include a system’s coverage, frequency, cost, and directness, but also the stops at which all trips begin and end. For this to happen, agencies must first maintain accurate records as to how stop amenities are distributed, from which they can then prioritize improvements. An in-person census of 2,964 street-level bus stops in San Francisco reveals inconsistency in and inadequacy of amenities, ranging from stops which are clearly marked, provide shelter, seating, real-time arrival

information, clear curbs, and route maps, to those which are invisible to potential riders, uncomfortable for those waiting, and hemmed in by parked cars. Employing a conception of equity based on the social minimum principle, which applied here scrutinizes stop amenities based on their *minimum level* of investment, this study finds significant deficits: shelters and seating are absent at a majority of all bus stops, nearly a third of all stops are obstructed by on-street parking, and more than one in ten stops lacks legible route signage of any kind. Moreover, employing Rawls' difference principle, which here concerns the spatial distribution of stop amenities, indicates that the northern half of the city has a greater percentage of stops with seating, shelter, and clear curbs. In addition, clusters of low-amenity stops lie within the city's southeast corner and its southern half generally. There is also evidence of a relationship between stop amenities and race, such that census tracts with higher shares of white residents are more likely to feature bus stops with seating, shelters, and clear curbs.

Breaking down stop amenities by bus route also reveal large disparities, from those routes which have seating at 75% of stops compared to just 10% along others. These differences are further evident when dividing routes by headways; those stops which are served least frequently by buses are least likely to provide seating, shelters, or clear curbs. In essence, the longer a rider likely has to wait for a bus in the SFMTA system, the lower the chance is there are amenities which would make such waiting comfortable. Indeed, there is also a connection between route frequency and the geographic distribution of stop amenities; stops in the north half of San Francisco are far more likely to be served by higher-frequency stops (though this does not fully explain the north-south amenity imbalance). This study does not challenge the general logic of providing stop amenities at high-usage stops, nor does it believe all stops should be equivalent in terms of investment, but it calls into question the paucity of amenities at low-usage stops, or put another way, the lack of a minimum standard for bus stops. Indeed, as the literature review demonstrates, amenities at a bus stop may actually *alter* ridership, meaning that a low-amenity stop can actively deter it from ever growing. When stops within an entire neighborhood lack basic amenities, as this census identifies in San Francisco, increasing bus ridership may prove difficult.

In addition, a number of qualitative issues were observed, including legibility issues with route signage and NextBus ID stickers, lack of sidewalks or those without pavement, and vegetation which impedes riders' ability to reach the curb. These instances indicate that as much value as there is in quantifying the presence of specific amenities across a system, there is also benefit to visually reviewing transit stops for basic accessibility issues.

There are several directions future research on bus stops can take. First, censuses of this kind generate a rich trove of data that create the opportunity for deeper analyses concerning the presence or absence of amenities and different features of the urban environment. This relates to employment density, automobile ownership, the number of adjacent traffic lanes and speed limits, as well as attributes such as topography, populations of seniors and children, and proximity to rail transit. Though some stop-amenity patterns may be linked to explicit agency policy, others may be less obvious. Furthermore, if transit-stop censuses are to take place elsewhere, researchers must consider how regional differences might dictate what constitute relevant amenities. For example, San Francisco has a mild climate – without particularly hot summers or cold winters – which means that there is no expectation that bus

stops maintain heating or cooling capabilities. In contrast, northern cities such as Minneapolis, MN or Portland, ME may be places where bus-stop heating is of primary importance, whereas the availability of shade and air-conditioning could be a crucial amenity in cities such as Dallas, TX or Phoenix, AZ. There are also many other variables which could be related to stop amenities, such as street-tree coverage and/or intensity of the localized heat-island effect, road type and speed limits, and whether or not a stop serves multiple lines and is a common transfer point, among others. Moreover, censuses would benefit from rider interviews to understand if and how amenities influence tripmaking, as well as transit-agency interviews to determine what strategy was in place guiding the distribution of stop amenities to begin with.

Beyond this pressing research questions, several immediate policy recommendations flow from this census, for SFMTA as well as other agencies to which similar stop-amenity inadequacy and inconsistency likely apply. While time consuming, such a census is a straightforward, highly-accurate means of appraising stop amenities. This method is an ideal way to put oneself in the perspective of a system's current or potential riders in order to understand what may be encouraging or deterring usage. Indeed, close and repeated observation of stops over time can reveal subtle issues – like the placement of NextBus ID stickers – which may otherwise remain invisible.

As to specific amenities, first, the signage inconsistency documented (on top of the 11% of stops with no signage at all) makes locating stops difficult, particularly for those who have low-vision, or who are infrequent riders. Though SFMTA indicated that it would add metal signs to all stops (Bialick, 2015), this is still far from being the case, with the most common route signage being paint on metal street poles. Second, stops in any system which require riders to wade through parked cars in order to board are incredibly inconvenient and plainly fail a 'transit-first' policy. Such a layout is difficult to navigate for anyone with a mobility impairment, or with a stroller, and explicitly privileges automobile storage over transit use. Similar issues with stop accessibility in other cities have drawn lawsuits arguing transit agencies are violating the Americans with Disabilities Act (Sachs, 2007; Nobles, 2016). Third, given evidence that wait times are perceived as significantly longer for those who have to stand, seating of some kind should be present at as many stops as possible, rather than the current state of the SFMTA system, which provides seating at less than half of all stops.

This study has several limitations. First, a census of bus stops leaves out other system features which undoubtedly influence travel, such as pricing, layout, vehicle quality, crowding, and the ability to reach stops safely (Spears et al., 2013). Second, this study does not address or account for other factors contributing to stop quality, such as placement in relation to the block or nearest intersection (Diab and El-Geneidy, 2015), how bus stops relate to the flow of pedestrians (Hall et al., 2006), or the relationship of stops to bus and bike lanes (Zhang et al., 2018). Third, simply noting the presence of an amenity at a certain stop can leave out important details; for example, many of the ETA screens across the SFMTA system are often incorrect even when they are to outward appearances functioning (Graf, 2020). Fourth, as would be the case at nearly any point in time, this study excluded a small number of bus stops in San Francisco due to active construction, which prevented amenities from being cataloged. Fifth, there are likely other amenities that could have been included in this census, such as adjacent street lights, trash cans, or sidewalk incline. Lastly, there are other forms of public transit citywide, including

light-rail, commuter rail (Caltrain), and a subway system (BART), which this study does not address but nonetheless influences travel-behavior decisions and possibly SFMTA decision-making as to stop investments.

Finally, this census gathered data that could likely benefit riders if incorporated into trip-planning and wayfinding applications. One way this could be achieved is if GTFS, the technical standard for transit data sharing, is expanded to include stop amenities, such as seating and shelters. This would then require transit agencies to populate their stop records with current amenity information. Such additions could allow services like Google Maps or Apple Maps to alert users as to which stops have specific amenities, which could affect travel choices. For example, someone who has trouble standing for extended periods of time may want to filter nearby bus stops by those which provide seating. Or, riders may sort stops by the presence of shelter on a day with heavy rain. These scenarios only scratch the surface of possible advantages from making amenity information available to application developers, and eventually, travelers. Overall, stop amenities are an important component of transit trips, they can be reliably cataloged via manual visits, and reveal a great number of details about the allocation of resources across a system, which can inform improvements and perhaps even individual trip making.

References

- Abenoza, R.F., V. Ceccato, Y.O. Susilo, and O. Cats. (2018). "Individual, Travel, and Bus Stop Characteristics Influencing Travelers' Safety Perceptions." *Transportation Research Record* 2672 (8): 19–28. <https://doi.org/10.1177/0361198118758677>.
- Amin, R. (2018). "Transit Ridership on the Decline Across the U.S." *The Urbanist, SPUR*, December 2018. <https://www.spur.org/publications/urbanist-article/2019-01-24/transit-ridership-decline-across-us>.
- Attoh, K.A. (2019). *Rights in Transit: Public Transportation and the Right to the City in California's East Bay*. Geographies of Justice and Social Transformation 40. Athens: The University of Georgia Press.
- Azenkot, S., S. Prasain, A. Borning, E. Fortuna, R.E. Ladner, and J.O. Wobbrock. (2011). "Enhancing Independence and Safety for Blind and Deaf-Blind Public Transit Riders." *Human Factors in Computing Systems, Conference on Human Factors in Computing Systems*, , May, 3247–56. <https://doi.org/10.1145/1978942.1979424>.
- Baldwin, B., H. Boll, A. Lehto, J. Tump, Y. Park, M. Wyffels, W. Schlegel, and D. Huntington. (2010). "Bus Stops Guidelines." Portland, OR: TriMet. https://nacto.org/wp-content/uploads/2015/04/bus_stop_guidelines_trimet.pdf.
- Barrero, R., J.V. Mierlo, and X. Tackoen. (2008). "Energy Savings in Public Transport." *IEEE Vehicular Technology Magazine* 3 (3): 26–36. <https://doi.org/10.1109/MVT.2008.927485>.
- Bialick, A. (2015). "Muni's Yellow Pole Markings at Transit Stops Will Be Replaced By Real Signs." *Streetsblog San Francisco* (blog). April 23, 2015. <https://sf.streetsblog.org/2015/04/23/munis-yellow-pole-markings-at-transit-stops-will-be-replaced-by-real-signs/>.
- Bliss, L. (2019). "Very Bad Bus Signs and How to Make Them Better." *CityLab*, September 19, 2019. <https://www.citylab.com/transportation/2019/09/bus-stop-sign-design-public-transit-investment-city-signage/598279/>.
- "Bus Stop Design & Planning Guide." (2011). Rogue Valley Transportation District. <https://www.rvtd.org/Files/RVTD%20BUS%20STOP%20DESIGN%20GUIDELINES.pdf>.
- "Bus Stop Safety and Accessibility Study." (2018). Radford, VA: New River Valley Metropolitan Planning Organization. <http://nrvc.org/wp-content/uploads/2018/05/RT-Bus-Stop-Safety-and-Transportation-Study.pdf>.
- Campbell, M., C. Bennett, C. Bonnar, and A. Borning. (2014). "Where's My Bus Stop? Supporting Independence of Blind Transit Riders with StopInfo." In *Proceedings of the 16th International ACM SIGACCESS Conference on Computers & Accessibility*, 11–18. ASSETS '14. Rochester, New York, USA: Association for Computing Machinery. <https://doi.org/10.1145/2661334.2661378>.
- Cassidy, M. (2020). "Muni to Close Majority of Bus Lines Because of Coronavirus." *San Francisco Chronicle*, April 5, 2020, sec. Local. <https://www.sfchronicle.com/bayarea/article/Muni-to-close-majority-of-bus-lines-due-to-15180935.php>.

- Clanton, N. (2020). "MARTA Army Wants Your Opinion on Atlanta Bus Stops." *Atlanta Journal Constitution*, February 5, 2020. <https://www.ajc.com/news/transportation/marta-army-wants-your-opinion-atlanta-bus-stops/s3XY1sDz5fIVCMjupn82eP/>.
- Colosi, L., R. Burk, and K. Barr. (2018). "Harrisburg Bus Stop Optimization Project." City of Harrisburg Pennsylvania. <https://static1.squarespace.com/static/56dc3f9cb654f9876576bab7/t/5c866701e4966b5f3f4b9bcc/1552312070233/HarrisburgBusStopOptimizationReport.pdf>.
- Corazza, M.V., and N. Favaretto. (2019). "A Methodology to Evaluate Accessibility to Bus Stops as a Contribution to Improve Sustainability in Urban Mobility." *Sustainability* 11 (3): 803. <https://doi.org/10.3390/su11030803>
- Diab, E.I., and A.M. El-Geneidy. (2015). "The Farside Story: Measuring the Benefits of Bus Stop Location on Transit Performance." *Transportation Research Record: Journal of the Transportation Research Board*, no. 2538. <https://trid.trb.org/view/1337034>.
- Di Ciommo, F., and Y. Shiftan. (2017). "Transport Equity Analysis." *Transport Reviews* 37 (2): 139–51. <https://doi.org/10.1080/01441647.2017.1278647>.
- Erhardt, G.D., M. Graehler, Jr., and R.A. Mucci. (2018). "Understanding the Recent Transit Ridership Decline in Major US Cities: Service Cuts or Emerging Modes?" In . Washington, D.C. <https://usa.streetsblog.org/wp-content/uploads/sites/5/2019/01/19-04931-Transit-Trends.pdf>
- Fan, Y., A. Guthrie, and D. Levinson. (2016). "Perception of Waiting Time at Transit Stops and Stations." Minneapolis, MN: Center for Transportation Studies - University of Minnesota. <http://www.cts.umn.edu/Publications/ResearchReports/reportdetail.html?id=2502>.
- Feke, M., B. Temming, and J. Freilich. (2018). "Bus Stop Design Guidelines." Cleveland, OH: Greater Cleveland Regional Transit Authority. <https://www.riderta.com/sites/default/files/serviceplanning/BusStopDesignGuidelines.pdf>.
- Ferris, B., K. Watkins, and A. Borning. (2010). "OneBusAway: Results from Providing Real-Time Arrival Information for Public Transit." In *Proceedings of the SIGCHI Conference on Human Factors in Computing Systems*, 1807–1816. CHI '10. Atlanta, Georgia, USA: Association for Computing Machinery. <https://doi.org/10.1145/1753326.1753597>.
- Finch, C.D. (2013). "Bus Stop Accessibility Study." Roanoke Valley Area Metropolitan Planning Organization. https://rvarc.org/wp-content/uploads/2013/10/Bus-Stop-Accessibility-Study_9-26-13.pdf.
- Fitzgerald Rodriguez, J. (2020). "End of an Era: Market Street to Go Car Free Jan. 29." *San Francisco Examiner*, January 2, 2020, sec. The City. <https://www.sfexaminer.com/news/end-of-an-era-market-street-to-go-car-free-jan-29/>.
- Fitzpatrick, K., K. Hall, D. Perkinson, L. Nowlin, and R. Koppa. (1996). "Guidelines for the Location and Design of Bus Stops." Report 19. College Station, TX: Texas A&M University. https://nacto.org/docs/usdg/tcrp_report_19.pdf.
- "Go Boston 2030." (2017). City of Boston. <https://www.boston.gov/departments/transportation/go-boston-2030>.
- Golub, A., R.A. Marcantonio, and T.W. Sanchez. (2013). "Race, Space, and Struggles for

- Mobility: Transportation Impacts on African Americans in Oakland and the East Bay.” *Urban Geography* 34 (5): 699–728. <https://doi.org/10.1080/02723638.2013.778598>.
- Gordon, R. (2007). “S.F. Muni Board OKs Plan for Clear Channel to Sell Transit Shelter Ads.” *San Francisco Chronicle*, September 4, 2007, sec. Bay Area & State. <https://www.sfgate.com/bayarea/article/S-F-Muni-board-OKs-plan-for-Clear-Channel-to-2505237.php>.
- Graehler Jr, M., R.A. Mucci, and G.D. Erhardt. (2019). “Understanding the Recent Transit Ridership Decline in Major US Cities: Service Cuts or Emerging Modes?” In , 19. Washington, D.C. <https://trid.trb.org/view/1572517>.
- Graf, C. (2020). “Muni Arrival Time System Set to Get \$89 Million Upgrade.” *San Francisco* 20, July 22, 2020, sec. The City. <https://www.sfexaminer.com/news/muni-arrival-time-system-set-to-get-89-million-upgrade/>.
- Grengs, J. (2002). “Community-Based Planning as a Source of Political Change: The Transit Equity Movement of Los Angeles’ Bus Riders Union.” *Journal of the American Planning Association* 68 (2): 165–78. <https://doi.org/10.1080/01944360208976263>.
- “Guidelines: Design and Placement of Transit Stops.” (2009). Washington, D.C.: Washington Metropolitan Area Transit Authority. https://nacto.org/docs/usdg/design_and_placement_of_transit_stops_kfh.pdf.
- Hall, S., J. Desyllas, and A. Byrne. (2006). “Bus Stops – How People Actually Use Them and the Implications for Design.” *ETC Proceedings*, 31. https://stuff.mit.edu/afs/athena/course/11/11.951/OldFiles/oldstuff/albacete/Other_Documents/Europe%20Transport%20Conference/traffic_engineering_an/bus_stops_how_peop1480.html
- Han, Y., W. Li, S. Wei, and T. Zhang. (2018). “Research on Passenger’s Travel Mode Choice Behavior Waiting at Bus Station Based on SEM-Logit Integration Model.” *Sustainability* 10 (6): 1–23.
- Hart, K. (2020). “Public Transit’s Death Spiral.” *Axios*, April 8, 2020, sec. Health. <https://www.axios.com/coronavirus-public-transportation-subway-bus-ridership-9f039bd9-459b-45f9-954c-b26380a037dc.html>.
- Hodges, T. (2010). “Public Transportation’s Role in Responding to Climate Change.” US DOT Federal Highway Administration. <https://www.transit.dot.gov/sites/fta.dot.gov/files/docs/PublicTransportationsRoleInRespondingToClimateChange2010.pdf>.
- Hosford, K., S. Tremblay, and M. Winters. (2020). “Identifying Unmarked Crosswalks at Bus Stops in Vancouver, Canada.” *Transport Findings*, June. <https://doi.org/10.32866/001c.13207>.
- Kim, Y.K., K. Bartholomew, and R. Ewing. (2018). “Impacts of Bus Stop Improvements.” UT-18.04. Utah Department of Transportation - University of Utah Department of City & Metropolitan Planning. <http://mrc.cap.utah.edu/wp-content/uploads/sites/8/2015/12/UT-18.04-Impacts-of-Bus-Stop-Improvements.pdf>.
- Lagune-Reutler, M., A. Guthrie, Y. Fan, and D. Levinson. (2016). “Transit Stop Environments and Waiting Time Perception: Impacts of Trees, Traffic Exposure, and Polluted Air.” *Transportation Research Record* 2543 (1): 82–90. <https://doi.org/10.3141/2543-09>.

- Lamoureux, Z., and V. Fast. (2019). "The Tools of Citizen Science: An Evaluation of Map-Based Crowdsourcing Platforms." *Spatial Knowledge and Information Canada* 7 (4): 7.
- Law, P., and B.D. Taylor. (2001). "Shelter from the Storm: Optimizing Distribution of Bus Stop Shelters in Los Angeles." *Transportation Research Record* 1753 (1): 79–85. <https://doi.org/10.3141/1753-10>.
- Loukaitou-Sideris, A. (1999). "Hot Spots of Bus Stop Crime." *Journal of the American Planning Association* 65 (4): 395–411. <https://doi.org/10.1080/01944369908976070>.
- Lusk, A. (2001). "Bus and Bus Stop Designs Related to Perceptions of Crime." FTA MI-26-7004-2001.8. Federal Transit Administration, U.S. Department of Transportation. <https://cdn1.sph.harvard.edu/wp-content/uploads/sites/1008/2013/09/bus-and-bus-stop-lusk.pdf>.
- Merry, K., and P. Bettinger. (2019). "Smartphone GPS Accuracy Study in an Urban Environment." *PLOS ONE* 14 (7): e0219890. <https://doi.org/10.1371/journal.pone.0219890>.
- "Metro Transit Bus Stop Amenities Study." (2018). Madison Area Transportation Planning Board. <http://www.madisonareampo.org/planning/documents/BusStopAmenitiesStudy.pdf>.
- Moore, A., M. Figliozzi, and C.M. Monsere. (2012). "Air Quality at Bus Stops: Empirical Analysis of Exposure to Particulate Matter at Bus Stop Shelters." *Transportation Research Record*, January. <https://doi.org/10.3141/2270-10>.
- Moran, M.E. 2021. "Drawing the Map: The Creation and Regulation of Geographic Constraints on Shared Bikes and E-Scooters in San Francisco, Ca." *Journal of Transport and Land Use* 14 (1): 197–218. <https://doi.org/10.5198/jtlu.2021.1816>.
- NACTO, ed. (2016). *Transit Street Design Guide*. Washington: Island Press. <https://nacto.org/2016/04/14/transit-street-design-guide/>
- "Next Generation Customer Information System." (2020). Presented at the SFMTA Board of Directors Meeting, San Francisco, CA, June 16. https://www.sfmta.com/sites/default/files/reports-and-documents/2020/06/6-16-20_item_14_contract_-_customer_info_system_-_slide_presentation.pdf.
- Nobles, W.P. (2016). "New Orleans Faces Lawsuit over Inaccessible Bus Stops." *The Times-Picayune*, March 29, 2016, sec. New Orleans. https://www.nola.com/news/traffic/article_5a1506a5-c8ef-514a-a3ec-e4687ffa2413.html.
- Parsons, and Gruen. (2013). "Transit Design Guidelines." OmniTrans. <https://design.omnitrans.org/wp-content/uploads/2014/03/OmnitransDesignGuidelines-08.pdf>.
- Pereira, R.H.M., T. Schwanen, and D. Banister. (2017). "Distributive Justice and Equity in Transportation." *Transport Reviews* 37 (2): 170–91. <https://doi.org/10.1080/01441647.2016.1257660>.
- Pierce, G., and D. Shoup. (2013). "Getting the Prices Right." *Journal of the American Planning Association* 79 (1): 67–81. <https://doi.org/10.1080/01944363.2013.787307>.
- Pulugurtha, S., and V. Vanapalli. (2008). "Hazardous Bus Stops Identification: An

- Illustration Using GIS." *Journal of Public Transportation* 11 (2). <https://doi.org/10.5038/2375-0901.11.2.4>.
- Rawls, J. (1999). *A Theory of Justice*. Revised Edition. Cambridge, MA: Belknap Press, Harvard University Press.
- Roper, E. (2014). "Hundreds of Metro Bus Stops Have Thousands Seeking Shelters." *StarTribune*, September 2, 2014. <https://www.startribune.com/2014-hundreds-of-metro-bus-stops-have-thousands-seeking-shelters/265979041/?refresh=true>.
- Rubenstein, S. (2016). "Sf Marks the Very Middle of Town, More or Less." *San Francisco Chronicle*, June 8, 2016. <https://www.sfgate.com/bayarea/article/SF-marks-the-very-middle-of-town-more-or-less-7971599.php>.
- Sachs, P. (2007). "Repairs Lag, Costs Soar on Bend's Ada Fixes." *The Bulletin*, August 16, 2007. https://www.bendbulletin.com/localstate/repairs-lag-costs-soar-on-bend-s-ada-fixes/article_4c3978f5-5dbf-5705-abd7-2e808c3f90a8.html.
- Schaller, B. (2018). "The New Automobility: Lyft, Uber and the Future of American Cities." Brooklyn, NY: Schaller Consulting. <http://www.schallerconsult.com/rideservices/automobility.pdf>.
- Schmitt, A. (2018). "'Sorriest Bus Stops' Contest Final Four Battle: Vancouver vs. Pittsburgh." Streetsblog USA (blog). September 6, 2018. <https://usa.streetsblog.org/2018/09/06/sorriest-bus-stops-contest-final-four-battle-vancouver-vs-pittsburgh/>.
- Songchitruksa, P., and X. Zeng. (2010). "Getis-Ord Spatial Statistics to Identify Hot Spots by Using Incident Management Data." *Transportation Research Record* 2165 (1): 42–51. <https://doi.org/10.3141/2165-05>.
- "Space Coast Area Transit Bus Stop Accessibility Study." (2018). <https://spacecoasttpo.com/wp-content/uploads/2018/12/SCTPO-Bus-Stop-ADA-FINAL-REPORT-11-28-18-1.pdf>.
- Spears, S., D. Houston, and M.G. Boarnet. (2013). "Illuminating the Unseen in Transit Use: A Framework for Examining the Effect of Attitudes and Perceptions on Travel Behavior." *Transportation Research Part A: Policy and Practice* 58 (December): 40–53. <https://doi.org/10.1016/j.tra.2013.10.011>.
- Stanley, J., D.A. Hensher, J. Stanley, G. Currie, W.H. Greene, and D. Vella-Brodrick. (2011). "Social Exclusion and the Value of Mobility." *Journal of Transport Economics and Policy* 45 (2): 197–222.
- Swan, R. (2019). "City Speeds up Approval Process for New Bike Lanes, Road Safety Improvements." *San Francisco Chronicle*, June 5, 2019. <https://www.sfchronicle.com/bayarea/article/City-speeds-up-approval-process-for-new-bike-13937408.php#>.
- Tang, L., and P. Thakuriah. (2012). "Ridership Effects of Real-Time Bus Information System: A Case Study in the City of Chicago." *Transportation Research Part C: Emerging Technologies* 22 (June): 146–61. <https://doi.org/10.1016/j.trc.2012.01.001>.

- “Transit-First Policy.” (2007). San Francisco Municipal Transportation Agency.
<https://www.sfmta.com/transit-first-policy>.
- “Transportation System Plan.” (2018). Portland Bureau of Transportation.
<https://www.portlandoregon.gov/transportation/article/690972>.
- Waldron, J. (1986). “John Rawls and the Social Minimum.” *Journal of Applied Philosophy* 3 (1): 21–33.
<https://doi.org/10.1111/j.1468-5930.1986.tb00046.x>.
- Watkins, K.E., B. Ferris, A. Borning, G.S. Rutherford, and D. Layton. (2011). “Where Is My Bus? Impact of Mobile Real-Time Information on the Perceived and Actual Wait Time of Transit Riders.” *Transportation Research Part A: Policy and Practice* 45 (8): 839–48.
<https://doi.org/10.1016/j.tra.2011.06.010>.
- Weithman, P.J. (1995). “Waldron on Political Legitimacy and the Social Minimum.” *The Philosophical Quarterly (1950-)* 45 (179): 218–24. <https://doi.org/10.2307/2220421>.
- Woetzel, J., J. Remes, B. Boland, K. Lv, S. Sinha, G. Strube, J. Means, J. Law, A. Cadena, and V. von der Tann. (2018). “Smart Cities: Digital Solutions for a More Livable Future.” McKinsey & Company.
<https://www.mckinsey.com/~media/mckinsey/industries/capital%20projects%20and%20infrastructure/our%20insights/smart%20cities%20digital%20solutions%20for%20a%20more%20livable%20future/mgi-smart-cities-full-report.ashx>.
- Wu, W., A. Gan, F. Cevallos, and L. Shen. (2011). “Selecting Bus Stops for Accessibility Improvements for Riders with Physical Disabilities.” *Journal of Public Transportation* 14 (2).
<https://doi.org/10.5038/2375-0901.14.2.7>.
- Zhang, J., Z. Li, F. Zhang, Y. Qi, W. Zhou, Y. Wang, D. Zhao, and W. Wang. (2018). “Evaluating the Impacts of Bus Stop Design and Bus Dwelling on Operations of Multitype Road Users.” *Journal of Advanced Transportation* 2018 (December): 10.
<https://doi.org/10.1155/2018/4702517>.

Appendix: Table 2. Stop Amenities by SFMTA Bus Route

Route	Headway	Seating	Shelter	Clear Curb	Route Map	ETA Screen	Route Signage	NextBus ID
1	10 min	44%	44%	86%	44%	34%	96%	90%
2	10-20 min	62%	58%	99%	59%	46%	87%	80%
3	10-20 min	44%	42%	86%	44%	32%	91%	82%
5	10 min	74%	75%	99%	73%	52%	96%	89%
6	10-20 min	31%	43%	77%	29%	25%	97%	91%
7	10 min	38%	45%	81%	38%	27%	98%	80%
8	10 min	48%	44%	81%	44%	31%	93%	84%
9	10 min	29%	37%	78%	27%	18%	92%	74%
10	10-20 min	29%	26%	61%	26%	9%	87%	84%
12	10-20 min	53%	46%	91%	47%	13%	95%	94%
14	10 min	56%	55%	95%	55%	46%	92%	85%
18	20-30 min	30%	28%	51%	27%	20%	95%	91%
19	10-20 min	30%	29%	62%	27%	14%	88%	80%
21	10-20 min	63%	71%	100%	63%	44%	83%	88%
22	10 min	53%	55%	90%	53%	42%	90%	82%
23	20-30 min	17%	16%	62%	18%	10%	85%	76%
24	10-20 min	36%	31%	59%	31%	27%	94%	95%
25	10 min	61%	61%	94%	0%	0%	94%	94%
27	10-20 min	53%	45%	94%	47%	29%	85%	79%
28	10 min	58%	57%	99%	55%	41%	94%	88%
29	10-20 min	38%	24%	72%	22%	17%	95%	82%
30	10 min	45%	40%	83%	42%	24%	95%	89%
31	10-20 min	53%	51%	66%	49%	41%	94%	94%
33	10-20 min	36%	36%	82%	36%	33%	94%	81%
35	20-30 min	10%	5%	32%	5%	3%	87%	76%

36	20-30 min	16%	13%	39%	13%	11%	95%	90%
37	20-30 min	16%	14%	35%	12%	9%	97%	76%
38	10 min	75%	76%	92%	74%	54%	91%	91%
39	20-30 min	15%	12%	47%	15%	12%	88%	85%
41	N/A	22%	20%	88%	20%	14%	94%	84%
43	10-20 min	31%	30%	61%	27%	23%	91%	80%
44	10-20 min	35%	34%	65%	33%	19%	90%	74%
45	10-20 min	33%	27%	88%	27%	17%	92%	87%
47	10 min	51%	36%	96%	42%	27%	93%	91%
48	10-20 min	31%	25%	52%	25%	18%	88%	88%
49	10 min	42%	32%	97%	32%	25%	85%	83%
52	20-30 min	25%	22%	49%	24%	16%	93%	75%
54	20-30 min	11%	11%	31%	11%	8%	91%	66%
55	10-20 min	52%	52%	91%	52%	35%	78%	70%
56	20-30 min	17%	12%	26%	10%	7%	93%	83%
57	20-30 min	18%	13%	89%	10%	5%	96%	82%
66	20-30 min	14%	14%	16%	12%	14%	88%	86%
67	20-30 min	13%	11%	32%	11%	8%	92%	82%
76	N/A	44%	31%	94%	31%	19%	88%	75%
79	N/A	50%	20%	100%	20%	20%	100%	100%
81	N/A	60%	60%	100%	60%	20%	100%	80%
82	N/A	35%	35%	95%	35%	25%	100%	85%
83	10-20 min	25%	25%	100%	25%	0%	100%	100%
88	N/A	39%	39%	94%	39%	39%	100%	94%
90	N/A	47%	42%	100%	42%	26%	96%	89%
91	N/A	42%	38%	87%	38%	26%	90%	87%

Headways are based on SFMTA's system map labeled "Winter/Spring 2019." Headways listed as "N/A" indicate routes which do not follow standard SFMTA service frequencies, such as those which serve special events or "owl" buses which run overnight.