File No.	190964	Committee Item No.	6
		Board Item No.	8

COMMITTEE/BOARD OF SUPERVISORS

AGENDA PACKET CONTENTS LIST

Date Noverlate 5 2017	Committee: Land Use	and Transportation Con	nmittee	Date October 28, 2019
		s Meeting		Date November 5, 2019
Resolution Cordinance Budget and Legislative Analyst Report Youth Commission Report Introduction Form Department/Agency Cover Letter and/or Report MOU Grant Information Form Grant Budget Subcontract Budget Contract/Agreement Form 126 – Ethics Commission Award Letter Application Public Correspondence OTHER (Use back side if additional space is needed) X DRAFT 2019 SFGBC X Exhibit A Findings X 2019 Non Residential New Construction Energy Effectiveness X 2019 CGBC < ***CLICK HERE TO VIEW X BIC Ltr 081219 X DB Ltr 092019 X Referral CEQA 100819 C Completed by: Erica Major Date October 24, 2019		•		•
Completed by: Erica Major Date October 24, 2019 Completed by: Er		on		
Legislative Digest Budget and Legislative Analyst Report Youth Commission Report Introduction Form Department/Agency Cover Letter and/or Report MOU Grant Information Form Grant Budget Subcontract Budget Contract/Agreement Form 126 - Ethics Commission Award Letter Application Public Correspondence OTHER (Use back side if additional space is needed) DRAFT 2019 SFGBC X Exhibit A Findings X 2019 Non Residential New Construction Energy Effectiveness X 2019 Res New Construction Reach Code Cost Effectiveness X 2019 CGBC	Land Land			
Budget and Legislative Analyst Report Youth Commission Report Introduction Form Department/Agency Cover Letter and/or Report MOU Grant Information Form Grant Budget Subcontract Budget Contract/Agreement Form 126 – Ethics Commission Award Letter Application Public Correspondence OTHER (Use back side if additional space is needed) DRAFT 2019 SFGBC Exhibit A Findings DRAFT 2019 Non Residential New Construction Energy Effectiveness 2019 Res New Construction Reach Code Cost Effectiveness 2019 CGBC <***CLICK HERE TO VIEW BIC Ltr 081219 BIC Ltr 081219 BIC Ltr 092019 Referral CEQA 100819 CEQA Determination 101519 Comm Rpt Memo 102219 Completed by: Erica Major Date October 24, 2019	XX			
		-	Renor	••
Introduction Form Department/Agency Cover Letter and/or Report MOU Grant Information Form Grant Budget Subcontract Budget Contract/Agreement Form 126 - Ethics Commission Award Letter Application Public Correspondence OTHER (Use back side if additional space is needed) DRAFT 2019 SFGBC			ricpor	
Department/Agency Cover Letter and/or Report MOU Grant Information Form Grant Budget Subcontract Budget Contract/Agreement Form 126 – Ethics Commission Award Letter Application Public Correspondence OTHER (Use back side if additional space is needed) DRAFT 2019 SFGBC X Exhibit A Findings X 2019 Non Residential New Construction Energy Effectiveness X 2019 Res New Construction Reach Code Cost Effectiveness X 2019 CGBC <***CLICK HERE TO VIEW DBI Ltr 092019 X Referral CEQA 100819 X CEQA Determination 101519 Comm Rpt Memo 102219 Completed by: Erica Major Date October 24, 2019				
MOU Grant Information Form Grant Budget Subcontract Budget Contract/Agreement Form 126 – Ethics Commission Award Letter Application Public Correspondence OTHER (Use back side if additional space is needed) X DRAFT 2019 SFGBC X Exhibit A Findings 2019 Non Residential New Construction Energy Effectiveness 2019 Res New Construction Reach Code Cost Effectiveness 2019 CGBC < ***CLICK HERE TO VIEW X BIC Ltr 081219 X Referral CEQA 100819 X Referral CEQA 100819 X CEQA Determination 101519 Comm Rpt Memo 102219 Completed by: Erica Major Date October 24, 2019 Completed by: Erica Major Date October 24, 2019 Date October 24, 2019 Date October 24, 2019 Completed by: Erica Major Date October	harmed harmed		er and/	or Report
Grant Information Form Grant Budget Subcontract Budget Contract/Agreement Form 126 – Ethics Commission Award Letter Application Public Correspondence OTHER (Use back side if additional space is needed) X DRAFT 2019 SFGBC X Exhibit A Findings X 2019 Non Residential New Construction Energy Effectiveness X 2019 Res New Construction Reach Code Cost Effectiveness X 2019 CGBC < ****CLICK HERE TO VIEW X BIC Ltr 081219 X DBI Ltr 092019 X Referral CEQA 100819 CEQA Determination 101519 Completed by: Erica Major Date October 24, 2019		,	- 1 411141	
Subcontract Budget Contract/Agreement Form 126 – Ethics Commission Award Letter Application Public Correspondence OTHER (Use back side if additional space is needed) DRAFT 2019 SFGBC X Exhibit A Findings X 2019 Non Residential New Construction Energy Effectiveness X 2019 Res New Construction Reach Code Cost Effectiveness X 2019 CGBC <***CLICK HERE TO VIEW X BIC Ltr 081219 X DBI Ltr 092019 X Referral CEQA 100819 X CEQA Determination 101519 Comm Rpt Memo 102219 Completed by: Erica Major Date October 24, 2019	hammed hammed .	formation Form		
Contract/Agreement Form 126 – Ethics Commission Award Letter Application Public Correspondence OTHER (Use back side if additional space is needed) X	Grant B	udget		
Form 126 – Ethics Commission Award Letter Application Public Correspondence OTHER (Use back side if additional space is needed) DRAFT 2019 SFGBC Exhibit A Findings 2019 Non Residential New Construction Energy Effectiveness 2019 Res New Construction Reach Code Cost Effectiveness 2019 CGBC < ***CLICK HERE TO VIEW BIC Ltr 081219 DBI Ltr 092019 Referral CEQA 100819 CEQA Determination 101519 Comm Rpt Memo 102219 Completed by: Erica Major Date October 24, 2019	Subcon	tract Budget		
Award Letter Application Public Correspondence OTHER (Use back side if additional space is needed) \[\begin{array}{cccccccccccccccccccccccccccccccccccc				
Application Public Correspondence OTHER (Use back side if additional space is needed) \[\begin{array}{cccccccccccccccccccccccccccccccccccc			1	
OTHER (Use back side if additional space is needed) X	<u></u>			
OTHER (Use back side if additional space is needed) X				
X DRAFT 2019 SFGBC X Exhibit A Findings X 2019 Non Residential New Construction Energy Effectiveness X 2019 Res New Construction Reach Code Cost Effectiveness X 2019 CGBC < ****CLICK HERE TO VIEW	Public C	Correspondence		
X	OTHER (Use ba	ck side if additional spa	ace is n	needed)
X	□ □ DRAFT	2019 SEGBC	•	•
Z 2019 Non Residential New Construction Energy Effectiveness 2019 Res New Construction Reach Code Cost Effectiveness 2019 CGBC < ***CLICK HERE TO VIEW X BIC Ltr 081219 X DBI Ltr 092019 X Referral CEQA 100819 X CEQA Determination 101519 X Comm Rpt Memo 102219 Completed by: Erica Major Date October 24, 2019 Completed by: Erica Major Date October 24, 2019 Date October 24, 20	X Exhibit			
Z 2019 Res New Construction Reach Code Cost Effectiveness 2019 CGBC < ***CLICK HERE TO VIEW X BIC Ltr 081219 X DBI Ltr 092019 X Referral CEQA 100819 X CEQA Determination 101519 X Comm Rpt Memo 102219 Completed by: Erica Major Date October 24, 2019 Date October	X $ X $ 2019 N		struction	n Energy Effectiveness
Z 2019 CGBC < ***CLICK HERE TO VIEW X BIC Ltr 081219 X DBI Ltr 092019 X Referral CEQA 100819 X CEQA Determination 101519 X Comm Rpt Memo 102219 Completed by: Erica Major Date October 24, 2019		es New Construction Rea	ach Cod	de Cost Effectiveness
X DBI Ltr 092019 X Referral CEQA 100819 X CEQA Determination 101519 X Comm Rpt Memo 102219 Completed by: Erica Major Date October 24, 2019	∑ <u>2019 C</u>	GBC < ***CLICK HER	ETO V	TEW
X Referral CEQA 100819 X CEQA Determination 101519 X Comm Rpt Memo 102219 Completed by: Erica Major Date October 24, 2019	- Landers - Land			
CEQA Determination 101519 Comm Rpt Memo 102219 Completed by: Erica Major Date October 24, 2019				
Completed by: Erica Major Date October 24, 2019				
Completed by: Erica Major Date October 24, 2019				
	X X Comm	Rpt Memo 102219		
		-		·
	Ц Ц			
	Completed by:	rica Major	_Date_	October 24, 2019
	Completed by:	rica Major	_Date_	October 29, 2019

https://sfgov.legistar.com/View.ashx?

M=F&ID=7729762&GUID=EEEFF7CF-83C2-41B8-ADAE-7AF0613F6CC1

BOARD of SUPERVISORS



City Hall
Dr. Carlton B. Goodlett Place, Room 244
San Francisco 94102-4689
Tel. No. 554-5184
Fax No. 554-5163
TDD/TTY No. 554-5227

MEMORANDUM

LAND USE AND TRANSPORTATION COMMITTEE SAN FRANCISCO BOARD OF SUPERVISORS

TO:

Supervisor Aaron Peskin, Chair, Land Use and Transportation Committee

FROM:

Erica Major, Assistant Clerk, Land Use and Transportation Committee

DATE:

October 29, 2019

SUBJECT:

COMMITTEE REPORT, BOARD MEETING

Tuesday, October 29, 2019

The following file should be presented as a **COMMITTEE REPORT** at the Board meeting, Tuesday, October 29, 2019. This item was acted upon at the Committee Meeting on Monday, October 28, 2019, at 1:30 p.m., by the votes indicated.

Item No. 31 File No. 190964

Ordinance repealing the 2016 Green Building Code in its entirety and enacting a 2019 Green Building Code consisting of the 2019 California Green Building Standards Code as amended by San Francisco; adopting environmental findings and findings of local conditions under the California Health and Safety Code; providing for an operative date of January 1, 2020; and directing the Clerk of the Board of Supervisors to forward the legislation to the California Building Standards Commission as required by State law.

RECOMMENDED AS A COMMITTEE REPORT

Vote: Supervisor Aaron Peskin - Aye Supervisor Ahsha Safai - Aye Supervisor Matt Haney - Aye

Board of Supervisors
 Angela Calvillo, Clerk of the Board
 Alisa Somera, Legislative Deputy
 Jon Givner, Deputy City Attorney

NOTE:

Ordinance repealing the 2016 Green Building Code in its entirety and enacting a 2019 Green Building Code consisting of the 2019 California Green Building Standards Code as amended by San Francisco; adopting environmental findings and findings of local conditions under the California Health and Safety Code; providing for an operative date

of January 1, 2020; and directing the Clerk of the Board of Supervisors to forward the

legislation to the California Building Standards Commission as required by State law.

[Green Building Code - Repeal of Existing 2016 Code and Enactment of 2019 Edition]

Unchanged Code text and uncodified text are in plain Arial font.

Additions to Codes are in single-underline italics Times New Roman font.

Deletions to Codes are in strikethrough italics Times New Roman font.

Board amendment additions are in double-underlined Arial font.

Board amendment deletions are in strikethrough Arial font.

Asterisks (* * * *) indicate the omission of unchanged Code subsections or parts of tables.

Be it ordained by the People of the City and County of San Francisco:

Section 1. Environmental Findings. The Planning Department has determined that the actions contemplated in this ordinance comply with the California Environmental Quality Act (California Public Resources Code Sections 21000 et seq.). Said determination is on file with the Clerk of the Board of Supervisors in File No. 190964 and is incorporated herein by reference. The Board affirms this determination.

Section 2. General Findings.

(a) The California Building Standards Code is contained in Title 24 of the California Code of Regulations. It consists of 12 Parts, which are based upon model codes that are amended by the State agencies with jurisdiction over the subject matter. The California Green Building Standards Code is Part 11 of Title 24 of the California Code of Regulations.

- (b) The State of California adopts a new California Building Standards Code every three years ("triennial CBSC") with supplemental amendments published in intervening years. The triennial CBSC goes into effect throughout the State of California 180 days after its publication by the California Building Standards Commission or at a later date established by the Commission. The 2019 triennial CBSC will go into effect on January 1, 2020.
- (c) Local jurisdictions must enforce the California Building Standards Code but they may also enact more restrictive building standards that are reasonably necessary because of local climate, geologic, or topographical conditions. Local amendments may be made both to a triennial CBSC and also to its individual Parts during the intervening years; however, local amendments previously adopted are not automatically applicable to a triennial CBSC. Rather, they must be re-enacted with the required findings of local climate, geologic, or topographical conditions, expressly made applicable to the new triennial CBSC, and with an operative date no earlier than the effective date of the new State Code.
- (d) As in past triennial CBSC adoption cycles, by this ordinance the Board of Supervisors repeals the 2016 San Francisco Green Building Code in its entirety, enacts the 2019 San Francisco Green Building Code, and re-enacts the existing local amendments to make them applicable to the 2019 California Green Building Standards Code.
- (e) Pursuant to Charter Section D3.750-5, the Building Inspection Commission considered and approved San Francisco's amendments to the 2019 California Green Building Standards Code at a duly noticed public hearing that was held on July 17, 2019.

Section 3. Findings regarding Local Conditions.

(a) California Health and Safety Code Sections 17958.7 and 18941.5 provide that before making any changes or modifications to the California Green Building Code and any other applicable provisions published by the California Building Standards Commission, the

governing body must make an express finding that each such change or modification is reasonably necessary because of specified local conditions. The local amendments together with the required findings must be filed with the California Building Standards Commission before the local changes or modifications can go into effect.

- (b) The City and County of San Francisco is unique among California communities with respect to local climate, geologic, topographical, and other conditions. A specific list of findings that support San Francisco's modifications to the 2019 California Green Building Standards Code, with a section-by-section correlation of each modification with a specific numbered finding, are contained in Exhibit A entitled "Standard Findings for San Francisco Building Standards Code Amendments."
- (c) Pursuant to California Health and Safety Code Sections 17958.7 and 18941.5, the Board of Supervisors finds and determines that the local conditions described in Exhibit A constitute a general summary of the most significant local conditions giving rise to the need for modification of the 2019 California Green Building Standards Code provisions published by the California Building Standards Commission. The Board of Supervisors further finds and determines that the proposed modifications are reasonably necessary based upon the local conditions set forth in Exhibit A.

Section 4. Findings Required by California Public Resources Code and Title 24 of the California Code of Regulations.

(a) Public Resources Code Section 25402.1(h)(2) and Section 10-106 of the California Code of Regulations, Title 24, Part 1, Locally Adopted Energy Standards, authorize a local jurisdiction to adopt and enforce more restrictive local energy standards, provided that the local jurisdiction makes a determination that the local standards are cost effective and will save more energy than the current Statewide standards and provided further that the local

jurisdiction files an application for approval with the California Energy Commission together with documentation supporting the cost-effectiveness determination. Local energy standards may take effect only after the California Energy Commission has reviewed and formally approved them.

- (b) Local energy standards previously adopted are not automatically applicable to a triennial CBSC. Rather, they must be re-enacted with a new cost-effectiveness study and determination based on the new State standards, and be re-approved by the California Energy Commission.
- (c) Based upon the findings of a cost-effectiveness study performed on the more restrictive local standards contained in the City's proposed 2019 San Francisco Green Building Code, the Board of Supervisors hereby determines that these local energy standards are cost effective and will save more energy than the standards contained in the 2019 California Green Building Standards Code. A copy of the cost-effectiveness study is on file with the Clerk of the Board of Supervisors in File No. 190964.

Section 5. Repeal of 2016 San Francisco Green Building Code and Enactment of the 2019 San Francisco Green Building Code.

- (a) The 2016 San Francisco Green Building Code is hereby repealed in its entirety. The San Francisco Green Building Code being repealed was enacted on November 22, 2016, by Ordinance No. 229-16, with an operative date of January 1, 2017. It was amended by Ordinance No. 92-17. These ordinances are available on the Board of Supervisors' website.
- (b) The 2019 San Francisco Green Building Code is hereby enacted. It consists of the 2019 California Green Building Standards Code and San Francisco's existing local amendments, which are re-enacted and expressly made applicable to the 2019 California Green Building Standards Code. Copies of the 2019 California Green Building Standards

Code and the stand-alone San Francisco amendments are declared to be part of Board File No. 190964 and are incorporated into this ordinance by reference as though fully set forth. Existing San Francisco amendments that are being made applicable to the 2019 California Green Building Standards Code are shown in unformatted ("plain") text and may include bold and/or italicized type; new San Francisco amendments are underlined; and deleted San Francisco amendments are in strikeout text.

Section 6. Continuance of Actions Under Prior Code. Nothing contained in this ordinance shall be construed as abating any action now pending under or by virtue of any ordinance of the City and County of San Francisco hereby repealed, nor shall this ordinance be construed as discontinuing, abating, modifying or altering any penalties accruing, or to accrue, or as waiving any right of the City under any such ordinance.

Section 7. Severability. If any section, subsection, sentence, clause, or phrase of this ordinance is, for any reason, held to be invalid, such decision shall not affect the validity of the remaining portions of this ordinance. The Board of Supervisors hereby declares that it would have passed this ordinance, and each section, subsection, sentence, clause, or phrase of this Ordinance, irrespective of the fact that any one or more sections, subsections, sentences, clauses, or phrases be declared invalid.

Section 8. Effective and Operative Dates. This ordinance shall become effective 30 days after enactment. Enactment occurs when the Mayor signs the ordinance, the Mayor returns the ordinance unsigned or does not sign the ordinance within ten days of receiving it, or the Board of Supervisors overrides the Mayor's veto of the ordinance. This ordinance shall

take effect and be in full force on and after either January 1, 2020 or its effective date if the effective date is later.

Section 9. Directions to Clerk. Upon final passage of this ordinance, the Clerk of the Board of Supervisors is hereby directed to transmit to the California Building Standards Commission pursuant to the applicable provisions of State law 1) this ordinance, 2) the Exhibit A attachment, and 3) the San Francisco modifications to the 2019 California Green Building Standards Code.

APPROVED AS TO FORM: DENNIS J. HERRERA, City Attorney

By:

ROBB KAPLA Deputy City Attorney

n:\legana\as2019\1900415\01392964.docx

FILE NO. 190964

LEGISLATIVE DIGEST

[Green Building Code - Repeal of Existing 2016 Code and Enactment of 2019 Edition]

Ordinance repealing the 2016 Green Building Code in its entirety and enacting a 2019 Green Building Code consisting of the 2019 California Green Building Standards Code as amended by San Francisco; adopting environmental findings and findings of local conditions under the California Health and Safety Code; providing for an operative date of January 1, 2020; and directing the Clerk of the Board of Supervisors to forward the legislation to the California Building Standards Commission as required by State law.

Existing Law

The Green Building Code enhances the design and construction of buildings through the use of building concepts having a reduced negative impact or positive environmental impact. The Code encourages sustainable construction practices in the categories of: planning and design, energy efficiency, water efficiency and conservation, material conservation and resource efficiency, and environmental quality. The current San Francisco Green Building Code consists of the 2016 California Green Building Standards Code and San Francisco's local amendments to the 2016 California Green Building Standards Code ("San Francisco Amendments").

Amendments to Current Law

On January 1, 2020, a 2019 California Green Building Standards Code (also known as CalGreen) will go into effect throughout the State. The San Francisco Amendments to the 2016 California Code must be re-enacted and made applicable to the 2019 California Code. Therefore, as in past State Code adoption cycles, San Francisco will repeal its existing Green Building Code in its entirety and adopt a new Green Building Code consisting of the 2019 California Green Building Standards Code and San Francisco's local amendments to the 2016 California Green Building Standards Code ("San Francisco Amendments"). The San Francisco Amendments to the 2016 California Green Building Standards Code will be carried forward and made applicable to the 2019 California Green Building Standards Code with no or only minor technical changes.

The San Francisco Amendments are not integrated into the text of the California Codes but rather are separately printed in a stand-alone document. Therefore, the user must consult both texts in order to determine the complete code requirement. In the San Francisco Amendments, unchanged language from the 2019 California Green Building Standards Code is shaded gray, San Francisco's additions to the 2019 California Green Building Standards Code are shown in unshaded text, new (minor and technical) additions to San Francisco's amendments are underlined and deletions are shown with strikethrough.

BOARD OF SUPERVISORS .

FILE NO. 190964

Background Information

The State of California adopts a new California Building Standards Code every three years (the "triennial State Code") with supplements published in intervening years. The triennial State Code goes into effect throughout the State 180 days after its publication by the California Building Standards Commission or at a later date established by the Commission. In the current triennial State Code adoption cycle, the California Building Standards Code will go into effect on January 1, 2017. The California Building Standards Code is contained in Title 24 of the California Code of Regulations, and consists of several parts that are based upon model codes with amendments made by the State agencies with jurisdiction over the subject matter. The California Green Building Standards Code is Part 11 of Title 24 of the California Code of Regulations.

Local jurisdictions must enforce the California Building Standards Code but they may also enact more restrictive building standards that are reasonably necessary because of local conditions caused by climate, geology, or topography. Local amendments may be made to a triennial State Code and also throughout the intervening years. However, local amendments previously adopted are not automatically applicable to a new triennial State Code. Rather, they must be re-enacted with the required findings of local conditions, expressly made applicable to the new triennial State Code, and with an operative date no earlier than the effective date of the new State Code.

n:\legana\as2019\1900415\01384340.doc

BOARD of SUPERVISORS



City Hall
Dr. Carlton B. Goodlett Place, Room 244
San Francisco 94102-4689
Tel. No. 554-5184
Fax No. 554-5163
TDD/TTY No. 554-5227

October 8, 2019

File No. 190959-190964

Lisa Gibson
Environmental Review Officer
Planning Department
1650 Mission Street, Ste. 400
San Francisco, CA 94103

Dear Ms. Gibson:

On October 1, 2019, the Building Inspection Commission submitted the proposed legislation:

File No. 190959

Ordinance repealing the 2016 Building Code in its entirety and enacting a 2019 Building Code consisting of the 2019 California Building Code and the 2019 California Residential Code, as amended by San Francisco; adopting environmental findings and findings of local conditions under the California Health and Safety Code; providing for an operative date of January 1, 2020; and directing the Clerk of the Board to forward the legislation to the California Building Standards Commission as required by State law.

File No. 190960

Ordinance repealing the 2016 Existing Building Code in its entirety and enacting a 2019 Existing Building Code consisting of the 2019 California Existing Building Code as amended by San Francisco; adopting environmental findings and findings of local conditions under the California Health and Safety Code; providing for an operative date of January 1, 2020; and directing the Clerk of the Board to forward the legislation to the California Building Standards Commission as required by State law.

File No. 190961

Ordinance repealing the 2016 Electrical Code in its entirety and enacting a 2019 Electrical Code consisting of the 2019 California Electrical Code as amended by San Francisco; adopting environmental findings and findings of local conditions under the California Health and Safety Code; providing an operative date of January 1, 2020; and directing the Clerk of the Board of Supervisors to forward the legislation to the California Building Standards Commission as required by State law.

File No. 190962

Ordinance repealing the 2016 Mechanical Code in its entirety and enacting a 2019 Mechanical Code consisting of the 2019 California Mechanical Code as amended by San Francisco; adopting environmental findings and findings of local conditions under the California Health and Safety Code; providing an operative date of January 1, 2020; and directing the Clerk of the Board of Supervisors to forward the legislation to the California Building Standards Commission as required by State law.

File No. 190963

Ordinance repealing the 2016 Plumbing Code in its entirety and enacting a 2019 Plumbing Code consisting of the 2019 California Plumbing Code as amended by San Francisco; adopting environmental findings and findings of local conditions under the California Health and Safety Code; providing an operative date of January 1, 2020; and directing the Clerk of the Board of Supervisors to forward the legislation to the California Building Standards Commission as required by State law.

File No. 190964

Ordinance repealing the 2016 Green Building Code in its entirety and enacting a 2019 Green Building Code consisting of the 2019 California Green Building Standards Code as amended by San Francisco; adopting environmental findings and findings of local conditions under the California Health and Safety Code; providing for an operative date of January 1, 2020; and directing the Clerk of the Board of Supervisors to forward the legislation to the California Building Standards Commission as required by State law.

The above legislation are being transmitted to you for environmental review.

Angela Calvillo, Clerk of the Board

By: Erica Major, Assistant Clerk

Land Use and Transportation Committee

Attachment

Joy Navarrete, Environmental Planning Don Lewis, Environmental Planning Not defined as a project under CEQA Guidelines Sections 15378 and 15060(c)(2) because it would not result in a direct or indirect physical change in the environment.

Joy Navarrete 10/15/2019

San Francisco Green Building Code

Amendments to the

2019 California Green Building Standards Code (CALGreen)

Operative date: January 1, 2020

PROPOSED SAN FRANCISCO GREEN BUILDING CODE AMENDMENTS 2019 Edition

Text Format:

Unchanged language from the 2019 California Code is shaded, and may include **bold** and/or *italicized* formatting.

San Francisco amendments are printed in unformatted ("plain") text, and may include **bold** and/or *italicized* formatting.

Repealed San Francisco amendments appear plain and strikeout. New San Francisco amendments appear underlined.

Chapter 1 ____ ADMINISTRATION

SECTION 101 - GENERAL

101.1 Revise this section as follows:

101.1 Title. These regulations shall be known as the San Francisco Green Building Code, and may be cited as such, and will be referred to herein as "this code." The San Francisco Green Building Code is Part 11 of thirteen parts of the official compilation and publication of the adoption, amendment and repeal of building regulations to the California Code of Regulations, Title 24, and Chapter 13C of San Francisco Building Inspection Commission Amendments to the California Building Standards Code.

101.2 Revise this section as follows:

101.2 Purpose. The purpose of this chapter is to promote the health, safety and general welfare of San Francisco residents, workers, and visitors by minimizing waste of energy, water, and other resources in the construction and operation of buildings in the City and County of San Francisco and by providing a healthy indoor environment. The green building practices required by this chapter will also further the goal of reducing the greenhouse gas emissions in the City and County of San Francisco to 25 percent below 1990 levels by the year 2017, as stated in Board of Supervisors Resolution No. 158-02 and San Francisco Environment Code Chapter 9.

101.3 Revise this section as follows:

101.3 Scope. The provisions of this code shall apply to the planning, design, operation, construction, use and occupancy of every newly constructed building or structure, unless otherwise indicated in this code, as well as alterations to existing buildings throughout the City and County of San Francisco.

While this code references green building programs, the City and County of San Francisco does not confer certification under any green building program.

101.3.1 Revise this section as follows:

101.3.1 Regulated buildings, structures and applications. Provisions of this code shall apply to the following buildings, structures, and applications regulated by state agencies as specified in Sections 103 through 106 of California Green Building Standards Code Title 24 Part 11, modified by local ordinance with

supplemental requirements applicable to occupancy types A, B, I, M, E and R as defined by California Building Code Title 24 Section 302 (2016 2019) as amended pursuant to Section 101.7. When adopted by a state agency, the provisions of this code shall be enforced by the appropriate enforcing agency, but only to the extent of authority granted to such agency by statute.

101.4 Revise this section as follows:

101.4 Appendices. [Reserved]

101.6 Revise this section as follows:

101.6.1 Differences. In the event of any differences between these building standards and the standard reference documents, the text of this Chapter shall govern!

101.6.3 Revise this section as follows:

101.6.3. Conflicts. When the requirements of this code conflict with the requirements of any other part of the California Building Standards Code, Title 24, any provision contained elsewhere in the San Francisco Municipal Code, or any regulation or requirement adopted by the Public Utilities Commission or other City agency under its Charter authority, the most restrictive requirement shall prevail.

101.7 Revise this section as follows:

101.7 City and county amendments, additions and deletions. This code includes the amendments, deletions, and additions to California green building requirements which maintain stricter local green building standards.

101.10 Revise this section as follows:

101-10 Equivalency. Wherever reference is made to the LEED® or GreenPoint Rated systems, a comparable equivalent rating system may be used if approved by the Director. The applicable LEED®, GreenPoint Rated or equivalent versions of performance standards for applications subject to this chapter are:

LEED v4 for Interior Design and Construction (LEED v4 ID+C)

LEED v4 for Building Design and Construction (LEED v4 BD+C)

LEED v4 for Homes Design and Construction

GreenPoint Rated (GPR) Single Family New Home Construction -v7.0-8.0

GreenPoint Rated (GPR) Multifamily New Home Construction -v7.0-8.0

GreenPoint Rated (GPR) Existing Multifamily -v1.0

Wherever specific LEED prerequisites or credits are cited, such references are to LEED v4 BD+C. More recent LEED and GreenPoint Rated versions may be used, provided the credits and points achieved are as or at least as stringent as LEED v4 BD+C or GPR v7.0-8.0.

Wherever the LEED or GreenPoint Rated systems include a minimum energy or other performance requirement, the permit applicant may choose to meet the minimum performance requirements with an alternative equivalent method approved by the Director.

Compliance with any of these requirements may be verified and/or certified by any means, including third-party review or equivalent requirements verified via other rating systems, as approved by the Director.

101.11 Revise this section as follows:

101.11 Effective use of this code. The following steps shall be used to establish which provisions of this code are applicable to a specific occupancy:

- Establish the type of occupancy.
- 2. Find the section which covers the established occupancy.
- 3. Identify the minimum requirements of this code for the established occupancy in Sections 4 and 5.
- 4. Administrative Bulletin 93, provided by the Department of Building Inspection, summarizes how the requirements of San Francisco Green Building Code and relevant local requirements may be met. Appendices to Administrative Bulletin 93 include tabular summaries of required measures, and provide submittal forms.

Chapter 2 DEFINITIONS

SECTION 202 – DEFINITIONS

202 Add and amend the following definitions:

ELECTRIC VEHICLE CHARGING SPACE (EV Space). A space intended for installation of EV charging equipment and charging of electric vehicles. The EV Space need not be reserved exclusively for electric vehicle charging.

spaces served by electric vehicle charger(s) or other charging equipment allowing charging of electric vehicles. For purposes of determining compliance with accessibility requirements, when the permitted length of time a vehicle may occupy an electric vehicle charging station differs from the permitted duration of stay in publicly accessible parking spaces in the same parking area, electric vehicle charging stations are not considered parking spaces. When the permitted duration of stay in a space served by electric vehicle charger(s) is the same as other publicly accessible parking spaces in the same parking area, EVCS may be considered parking spaces. The EVCS need not be reserved exclusively for electric vehicle charging.

ELECTRIC VEHICLE (EV) FAST CHARGER. Off-board charging equipment with a minimum direct current or alternating current power output of 24 kW, for the purpose of providing an electric vehicle charge in significantly less time than a standard Electric Vehicle Charger.

ELECTRIC VEHICLE LOAD MANAGEMENT SYSTEM. An electronic system designed to allocate charging capacity among EV chargers

GREENPOINT RATED, GREENPOINTS and GREENPOINTS CHECKLIST. The residential green building rating system and checklist and certification methodology of the non-profit organization Build It Green.

HIGH-RISE RESIDENTIAL BUILDING. For the purposes of this code, a building that is of Occupancy Group R and is four stories or greater.

HISTORICAL RESOURCE. A property that meets the terms of the definitions in Section 21084.1 of the CEQA Statute (The California Environmental Quality Act [Public Resources Code Section 21084.1]) and Section 15064.5 of the CEQA Guidelines, as determined by the San Francisco Planning Department.

LARGE COMMERCIAL BUILDING. A commercial building or addition of Group B, M, A, I, or E occupancy that is 25,000 gross square feet or more.

LEED® and LEED® CHECKLIST. The Leadership in Energy and Environment Design rating system, certification methodology, and checklist of the United States Green Building Council (USGBC).

LOW-RISE RESIDENTIAL BUILDING. For the purposes of this code, a building that is of Occupancy Group R and is three stories or less or that is a one or two family dwelling or townhouse.

MAJOR ALTERATIONS. Alterations and additions where interior finishes are removed and significant

upgrades to structural and mechanical, electrical, and/or plumbing systems are proposed where areas of such construction are 25,000 gross square feet or more in Group B, M, or R occupancies of existing buildings.

NEW LARGE COMMERCIAL INTERIORS. First-time tenant improvements where areas of such construction are over 25,000 gross square feet or more in Group B or M occupancy areas of existing buildings.

NEWLY CONSTRUCTED (or NEW CONSTRUCTION). A newly constructed building (or new construction) is a building that has never before been used or occupied for any purpose and does not include additions, alterations or repairs.

NONRESIDENTIAL COMPLIANCE MANUAL. The document published by the California Energy Commission to aid in compliance and enforcement of the Title 24 California Building Energy Standards, for buildings of nonresidential occupancy and high-rise residential buildings.

PASSENGER VEHICLES. Motor vehicles designed primarily for transportation of persons, with capacity of 12 persons or less.

RESIDENTIAL COMPLIANCE MANUAL. The document published by the California Energy Commission to aid in compliance and enforcement of the Title 24 California Building Energy Standards, for low-rise residential buildings.

TRUCKS. Trucks or truck-based vehicles with both a payload capacity of 4,000 pounds or less, and a gross vehicle weight ratio of 14,000 pounds or less. As used herein, "trucks" does not include heavy duty vehicles, which are vehicles of any type with a gross vehicle weight ratio of more than 14,000 pounds.

Chapter 3 GREEN BUILDING

SECTION 301 – GENERAL

301.1 Revise this section as follows:

301.1 Scope. Buildings in the City and County of San Francisco shall be designed to include the green building measures specified as mandatory under the California Green Building Standards Code (CalGreen). Additional green building requirements established by the City and County of San Francisco are mandatory for:

(1) Newly constructed Group R occupancy buildings,

- (2) Newly constructed buildings of Group B, M, A, and I occupancies that are 25,000 gross square feet or more,
- (3) New first-time build-outs of commercial interiors that are 25,000 gross square feet or more in buildings of Group B or M occupancies, and
- (4) Major alterations that are 25,000 gross square feet or more in existing buildings of Group B, M or R occupancies, where interior finishes are removed and significant upgrades to structural and mechanical, electrical and/or plumbing systems are proposed.

SECTION 302 – MIXED OCCUPANCY BUILDINGS

302.1 Revise this section as follows:

302.1 Mixed Occupancy Buildings. In mixed occupancy buildings, each portion of a building shall

comply with the specific measures applicable to each specific occupancy as required by California Code of Regulations Title 24 Part 11 and the San Francisco Green Building Code. However, to fulfill any requirements of San Francisco Green Building Code Sections 4.103 through 4.105 and 5.103 through 5.105, as applicable, the project sponsor may apply a single required green building standard to the entire building.

Exceptions:

- I. [HCD] Accessory structures and accessory occupancies serving residential buildings shall comply with Chapter 4 and Appendix A4, as applicable
- 2. [HCD] For the purposes of CALGreen, live/work units, complying with Section 419 of the California Building Code, shall not be considered mixed occupancies. Live/work units shall comply with Chapter 4 and Appendix A4, as applicable.

SECTION 303 – PHASED PROJECTS

303.1.1.1 Add the following section:

303.1.1.1 Maintenance of required features. Any structure subject to this chapter shall maintain the green building features required herein, or equivalent regardless of subsequent alterations, additions, or changes of use, unless subject to subsequent or more stringent requirements.

304 Modify the following section:

SECTION 304 – VOLUNTARY TIERS

This section not applicable in San Francisco.

305 Modify the following section:

SECTION 305 [OSHPD 1] – CALGREEN TIER 1 AND CALGREEN TIER 2

This section not applicable in San Francisco.

306 Modify the following section:

SECTION 306 - VOLUNTARY MEASURES

This section not applicable in San Francisco.

Chapter 4

RESIDENTIAL MANDATORY MEASURES

Division 4.1

PLANNING AND DESIGN

SECTION 4.101 - GENERAL

4101.1 Revise the section as follows:

4.101.1 Scope. The provisions of this division outline planning, design and development methods that include environmentally responsible site selection, building design, building siting and development to protect, restore enhance the environmental quality of the site, respect the integrity of adjacent properties and promote the health, safety and welfare of San Francisco residents.

4,103 Replace this section as follows:

SECTION 4.103 – REQUIREMENTS FOR GROUP R OCCUPANCY BUILDINGS

4.103.1 New low-rise residential buildings.

4.103.1.1 Rating requirements

New residential buildings must be GreenPoint Rated and applicants must submit documentation demonstrating that a minimum of 75 GreenPoints from the GreenPoints Single Family New Construction Checklist or the Green-Points Multifamily New Construction Checklist will be achieved. Alternatively, this rating requirement may be met by obtaining LEED Silver certification.

4.103.1.2 Stormwater management

Projects subject to this section shall meet the San Francisco Public Utilities Commission stormwater management requirements.

4.103.2 New high-rise residential buildings

4.103.2.1 Rating requirement

Permit applicants must submit documentation to achieve LEED® "Silver" certification. Alternatively, this rating requirement may be met by obtaining the Green-Point Rated designation and submitting documentation demonstrating that a minimum of 75 Green-Points from the Green-Point Rated Multifamily New Construction checklist will be achieved.

4.103.2.2 [Reserved]

- **4.103.2.3** Construction debris management. Permit applicants must submit documentation verifying the diversion of a minimum 75 percent of the projects construction and demolition debris. The waste management plan necessary to meet this requirement shall be updated as necessary and shall be accessible during construction for examination by the Department of Building Inspection. Permit applicants must also meet the requirements of San Francisco Environment Code Chapter 14 and San Francisco Building Code Chapter 13B (Construction and Demolition Debris Recovery Program.)
- **4.103.2.4** Stormwater management. Projects subject to this section shall meet the San Francisco Public Utilities Commission stormwater management requirements.
- **4.103.2.4.1** Construction activity stormwater pollution prevention. All projects, whether greater or lesser than one acre, must develop and implement construction activity pollution prevention and site run-off controls adopted by the San Francisco Public Utilities Commission.

4.103.3 Major Alterations to Existing Group R Occupancy Buildings.

4.103.3.1 Rating Requirement.

Permit applicants must submit documentation to achieve a LEED® Gold rating. Alternatively, this rating requirement may be met by obtaining the GreenPoint Rated designation and submitting documentation demonstrating that a minimum of 75 GreenPoints from the GreenPoint Rated Multifamily checklist will be achieved. Major alterations applying to less than 80% of the building's gross floor area may alternately obtain the GreenPoint Rated Elements designation and submit documentation demonstrating that 49 points from the Green-Point Rated Multifamily checklist have been achieved.

4.103.3.2 Low-Emitting Materials.

Alterations utilizing LEED must submit documentation verifying that low-emitting materials are used, subject to on-site verification, meeting at least the following categories of materials covered under LEED EQ Credit Low-Emitting Materials wherever applicable: interior paints and coatings applied on-site, interior sealants and adhesives applied on site, flooring, and composite wood.

Alterations utilizing GreenPoint Rated must submit documentation to verify the use of low-emitting materials meeting the GreenPoint Rated Multifamily New Homes measures for low-emitting coatings, adhesives and sealants, and carpet systems.

4.103.3.3 Electric Vehicle Charging.

Sections 4.106.4 through 4.106.4.2.6 of this Chapter shall apply to all newly-constructed buildings and

associated newly-constructed parking facilities for passenger vehicles and trucks, and to major alterations to existing Group R occupancy buildings where electrical service to the building will be upgraded. In major alterations where existing electrical service will not be upgraded, the requirements of Sections 4.106.4 through 4.106.4.2.6 shall apply to the maximum extent that does not require an upgrade to existing electrical service.

4.104 Replace this section as follows:

SECTION 4.104 – HISTORIC PRESERVATION

4.104.1 On-site retention of historical features. For alterations of buildings determined to be historical resources, after demonstrating compliance with all applicable codes, including the 2016 2019 California Building Energy Efficiency Standards (Title 24, Part 6) and the 2016 2019 California Historical Building Code (Title 24, Part 8), the minimum points or credits required under this chapter shall be reduced for retention and in-situ reuse or restoration of certain character defining features, as described in Table 4.104A. Retention includes the rehabilitation and repair of character defining features that conform to the Secretary of the Interior's Standards for the Treatment of Historic Properties.

TABLE 4.104.A.

SIGNIFICANT HISTORICAL ARCHITECTUR AL FEATURES	PERCENT RETAINED*	ADJUSTMENT TO MINIMUM LEED POINT REQUIREMENT	ADJUSTMENT TO MINIMUM GREEN-POINTS REQUIREMENT
Windows @ principal façade(s)	100%	4	15
Other windows	At least 50%	¥	3
Other windows	@100% <u>Timba.</u>	2	6
Exterior doors @ principal façade(s)	100%	170	3.
Siding or wall finish @ principal façade(s)	100%	1	4
Trim & casing @ wall openings on principal façade(s)	100%	1	3
Roof cornices or decorative eaves visible from right-of- way	100%	1	3
Sub-cornices, belt-courses, water tables, and running trim visible from right-of-way	100%	1	3
Character-defining elements of significant interior spaces	100%	4	15
Other exterior ornamentation (e.g. cartouches, corbels, quoins, etc.) visible from right-of-way	80%	1	3

4.104.2. Adjustment to Green Credit for Retention of Historic Features. Where the historical resource is a portion of the total project, the LEED or GreenPoint Rated requirement shall be adjusted to equal the percentage of gross floor area of the historical resource compared to the total project gross floor area.

4.105 Replace this section as follows:

SECTION 4.105 – DEMOLITION OF EXISTING STRUCTURES

4.105.1 Adjustments to Rating Requirements for Building Demolition and Density. Applications subject to the San Francisco Green Building Code, whereby construction of a new building is proposed within five years of the demolition of a building on the site, where such demolition occurred after the effective date of the Green Building Ordinance - November 3, 2008 - the sustainability requirements for new buildings pursuant to the San Francisco Green Building Code shall be increased as follows:

4.105.1.1 LEED® Projects. For projects attaining a LEED® certification:

- (1) Where the building demolished was an historical resource, the required points shall be increased by 10 points.
- (2) Where the building demolished was not an historical resource, the required points shall be increased by 6 additional points.
- (3) Where the building demolished was not an historical resource and the number of dwellings in the residential portion of the replacement structure are tripled, the required points shall be increased by 5 additional points.

4.105.1.2 GreenPoint Rated Projects. For projects attaining GreenPoint Rated:

- (1) Where the building demolished was an historical resource, the required points shall be increased by 25 additional points.
- (2) Where the building demolished was not an historical resource, the required points shall be increased by 20 additional points.
- (3) Where the building demolished was not an historical resource and the number of dwellings in the residential portion of the replacement structure are tripled, the required points shall be increased by 17 additional points.

SECTION 4.106 - SITE DEVELOPMENT

4.106.4 Revise this section as follows:

4.106.4 Electric vehicle (EV) charging for new construction and major alterations. New construction and major alterations shall comply with Sections 4.106.4.1, 4.106.4.2, or 4.106.4.3, to provide electrical capacity and infrastructure to facilitate future installation and use of EV Chargers, such that the project will be capable of providing EV charging services at 100% of off-street parking spaces provided for passenger vehicles and trucks. Electric vehicle supply equipment (EVSE) shall be installed in accordance with the San Francisco Building Code and the San Francisco Electrical Code, subject to the following exceptions:

Exceptions:

- 1. On a case-by-case basis, where the Director has determined EV charging and infrastructure are not feasible based upon one or more of the following conditions:
 - 1.1 Where there is no commercial power supply.
- 1.2 Where there is evidence substantiating that meeting the requirements will alter the local utility infrastructure design requirements on the utility side of the meter so as to increase the utility side cost to the homeowner or the developer by more than \$400 per parking space. In such cases, buildings subject to Section 4.106.4 shall maximize the number of EV Charging Spaces, up to a utility side cost of a maximum of \$400 per space. Cost shall be determined by dividing the increase in local utility infrastructure cost attributable to compliance with this section by the sum of parking spaces and EV Charging Spaces.
- 2. Accessory Dwelling Units (ADU) and Junior Accessory Dwelling Units (JADU) without additional parking facilities.
- 3. In major alterations, where there is evidence substantiating that meeting the requirements of this section presents an unreasonable hardship or is technically infeasible, the Director may consider an appeal from the project sponsor to reduce the number of EV Charging Spaces required or provide for EV charging elsewhere.
- 4. Where a project is undertaken specifically to meet the City's Mandatory Seismic Retrofit Program as required under Chapter 4A, 4B, or 4D of the San Francisco Existing Building Code.
- 4.106.4.1 New one-and-two-family dwellings and townhouses with attached or adjacent private garages. For each parking space, install a 40-Amp 208 or 240-volt branch circuit, including raceway, electrical panel capacity, overprotection devices, wire, and termination point such as a receptacle. The

termination point shall be in close proximity to the proposed EV charger location. Raceways are required to be continuous at enclosed, inaccessible, or concealed areas and spaces. Raceway for each circuit shall not be less than trade size 1 (nominal 1-inch inside diameter).

4.106.4.1.1 Identification. The service panel or subpanel circuit directory shall identify the overcurrent protective device space(s) reserved for future EV charging as "EV READY" for full circuits and otherwise "EV CAPABLE". The raceway termination location shall be permanently and visibly marked as "EV READY" for full circuits and otherwise "EV CAPABLE".

4.106.4 Modify this section as follows and and delete notes 1 and 2:

4:106.4.2 New multifamily dwellings and major alterations: If residential parking is available, one hundred (100) percent of the total number of parking spaces on a building site, provided for all types of parking facilities, shall be electric vehicle charging spaces (EV spaces) capable of supporting future EVSE. Calculations for the required number of EV spaces shall be rounded up to the nearest whole number.

4:106:4.2.2 Electric vehicle charging space (EV Spaces) dimensions. Unless otherwise specified by Planning Code Section 154, EV spaces shall be designed to comply with the following:

1. The minimum length of each EV space shall be 18 feet (5486 mm).

2. The minimum width of each EV space shall be 9 feet (2743 mm).

3. One in every 25 EV spaces, but not less than one, shall also have an 8-foot (2438 mm) wide minimum aisle. A 5-foot (1524 mm) wide minimum aisle shall be permitted provided the minimum width of the EV space is 12 feet (3658 mm).

a Surface slope for this EV space and the aisle shall not exceed 4 unit vertical in 48 units horizontal (2.083 percent slope) in any direction.

- b. Notwithstanding any other applicable requirements, when an EV charger is installed serving an accessible parking space, the space may be considered a parking space if the duration of stay is not subject to any limitations different from those generally applied to other publicly accessible parking spaces in the same parking area. If the duration of stay in an accessible space equipped with an EV charger is subject to limitations different from those generally applied to other publicly accessible parking spaces in the same parking area, the space is not a parking space.
- 4. Accessible spaces must meet the dimensions specified above, Planning Code Section 154, or other applicable accessibility requirements, whichever would result in the largest space size.

4.106.4.2.3 Single EV space required. Where a single EV space is required, install a full circuit with a minimum of 40-Amp 208 or 240 Volt capacity, including listed raceway, sufficient electrical panel capacity, overcurrent protection devices, wire, and termination point such as a receptacle. The termination point shall be in close proximity to the proposed EV charger location. The raceway shall not be less than trade size 1 (nominal 1-inch inside diameter).

4.106.4.2.4 Multiple EV spaces required.

- (a) For a minimum of 10% of EV Spaces and in no case less than two EV Spaces when the total number of EV Spaces is two or more, install a full circuit with minimum of 40-Amp 208 or 240 Volt capacity per EV Space, including listed raceway, sufficient electrical panel service capacity, overcurrent protection devices, wire, and suitable listed termination point such as a receptacle. The termination point shall be in close proximity to the proposed EV charger location. Calculations for the number of EV Spaces shall be rounded up to the nearest whole number.
- (b) Branch circuit panelboard(s) shall be installed at each parking level with service capacity to deliver a minimum 40 amperes at 208 or 240 volts multiplied by 20% of the total number of EV Spaces. The panelboard(s) shall have sufficient space to install a minimum of one 40-ampere dedicated branch circuit and overcurrent protective device per EV Space up to a minimum of 20% of the total number of EV Spaces. The circuits and overcurrent protective devices shall remain reserved exclusively for EV charging.

Exception: Circuits and overcurrent protective devices in panelboards not located on the same level may contribute to the requirements of 4.106.4.2.4(b), provided the circuits are reserved exclusively for EV charging. For example, the circuit serving an EV Space dedicated to a condominium owner may connect to the electrical panelboard of the corresponding condominium.

- (c) For all EV Spaces not required to install full circuits or raceway per Section 4.106.4.2.4(a):
 - (1) Either:
- (A) Provide sufficient space for future installation of additional electrical panelboard(s) to support a 40 ampere 208 or 240 Volt capacity branch circuit and overcurrent protection device per EV Space, or equivalent consistent with Section 4.106.4.2.4.1; or
- (B) Provide space in installed electrical panelboard(s) to support installation of a 40 ampere 208 or 240 Volt capacity branch circuit and overcurrent protection device per EV Space, or equivalent consistent with Section 4.106.4.2.4.1.
- (2) Install raceway or sleeves where penetrations to walls, floors, or other partitions will be necessary to install panels, raceways, or related electrical components necessary per site conditions for future installation of branch circuits. All such penetrations must comply with applicable codes, including but not limited to the San Francisco Electrical Code and the San Francisco Fire Code.
- (d) Construction documents, including electrical engineering and design related documents, shall demonstrate that the electrical service capacity and electrical system, including any on-site distribution transformer(s), can charge EVSE at a minimum of 20% of the total number of EV Spaces simultaneously, at the full rated amperage of the EVSE or a minimum of 40 amperes per branch circuit, as modified by Section 4.106.4.2.4.1 Electric Vehicle Fast Charging Spaces. As appropriate, construction documents shall provide information on raceway method(s), wiring schematics, anticipated EV load management system design(s), and electrical load calculations.

NOTES:

1. Electric vehicle charging infrastructure and housing are critical priorities for the City and County of San Francisco. Where provisions of this Section 4.106.4.2.4 require the installation of an electrical transformer, and such transformer cannot be accommodated on the project site due to the combination of project site dimensions, San Francisco Building Code, San Francisco Electrical Code, and applicable utility regulations, the Director of Public Works is encouraged to issue a Sidewalk Vault Encroachment Permit,

provided that the fronting property owner complies with all requirements governing street occupancy, including but not limited to the San Francisco Public Works Code and Department of Public Works Order 165,553.

- 2. An EV load management system may be necessary in order to provide EV charging at more than 20% of EV Spaces.
 - 3. This section does not require EV chargers to be installed.

4.106.4.2.4.1 Electric Vehicle (EV) fast charging spaces.

(a) Installation of one EV Fast Charger may reduce the number of EV Spaces required under Section 4.106.4.2.4(a) by up to five EV Spaces, provided that the project includes at least one EV Space equipped with a full circuit able to deliver 40-Amp 208 or 240 Volt capacity to the EV Space, including listed raceway, sufficient electrical panel capacity, overcurrent protection devices, wire, and suitable listed termination point such as a receptacle.

The electrical panel board(s) provided at each parking level served by EV-Fast Chargers shall have sufficient capacity to supply each EV Fast Charger with a minimum of 30 kW AC in addition to the capacity to serve any remaining EV Spaces required under Section 4.106.4.2.4(a) with a minimum of 40 amperes per circuit at 208 or 240 volts per EV Space.

- (b) After the requirements of 4.106.4.2.4(a) are met, each planned EV Fast Charger may reduce the number of planned EV Spaces required under 4.106.4.2.4(e) by up to five spaces. Electrical engineering design and construction documents shall indicate the raceway termination point and proposed location of future EV fast charger spaces and EV fast chargers. Electrical engineering design and construction documents shall also provide information on amperage of EV fast chargers, raceway method(s), wiring schematics, and electrical load calculations to verify that the electrical panel service capacity and electrical system has sufficient capacity to simultaneously operate all installed EV fast chargers at the full rated amperage of the EV fast charger(s) and simultaneously serve any remaining spaces required by 4.106.4.2.4(a). Raceways and related components that are planned to be installed underground, enclosed, inaccessible, or in concealed areas and spaces shall be installed at the time of original construction.
- 4.106.4.2.5 Identification. The service panel or subpanel circuit directory shall identify the overcurrent protective device space(s) reserved for future EV charging purposes as "EVSE READY" for full circuits and otherwise "EVSE CAPABLE" in accordance with the California Electrical Code. The raceway termination location or receptacle shall be permanently and visibly marked as "EVSE READY" for full circuits and otherwise "EVSE CAPABLE," until such time as EVSE are installed.

Division 4.2 ENERGY EFFICIENCY

SECTION 4,201-GENERAL

4.201 Add the following section:

4.201.2. Renewable energy and better roofs.

(a) Newly constructed Group R occupancy buildings which are 4 occupied floors or greater, and less than or equal to 10 or fewer occupied floors and which apply for a building permit on or after January 1, 2017 shall install solar photovoltaic systems and/or solar thermal systems in the solar zone required by California

Code of Regulations (CCR), Title 24, Part 6 Section 110.10.

- (b) The minimum solar zone area for the project shall be calculated under Title 24, Part 6, Section 110.10(b) through (e), as applicable, and Residential Compliance Manual Chapter 7 or Nonresidential Compliance Manual Chapter 9, as applicable, except as provided below.
- (1) For single family residences, Exceptions 3 and 5 to Title 24, Part 6, Section 110.10(b)1A may be applied in the calculation of the minimum solar zone area. Exceptions 1, 2, 4, 6, and 7 may not be applied in the calculation. For single family residences subject to Planning Code Section 149, Exception 3 may be applied in the calculation of the minimum solar zone area, and Exceptions 1, 2, 4, 5, 6, and 7 may not be applied in the calculation.
- (2) (1) For Group R Occupancy buildings other than single family residences High Rise Multifamily Buildings and Hotel/Motel Occupancies, Exceptions 3 and 5 to Title 24, Part 6, Section 110.10(b)1B may be applied in the calculation of the minimum solar zone area. Exceptions 1, 2, and 4 may not be applied in the calculation. For Group R Occupancy buildings other than single family residences High Rise Multifamily Buildings and Hotel/Motel Occupancies subject to Planning Code Section 149, Exception 5 may be applied in the calculation of the minimum solar zone area, and Exceptions 1, 2, 3, and 4 may not be applied in the calculation.
- (3) (2) Buildings with a calculated minimum solar zone area of less than 150 contiguous square feet due to limited solar access under Exception 5 to Title 24, Part 6, Section 110.10(b)1A or Exception 3 to Title 24, Part 6, Section 110.10(b)1B are exempt from the solar energy requirements in this Section 4.201.2.
- (c). The sum of the areas occupied by solar photovoltaic collectors and/or solar thermal collectors must be equal to or greater than the solar zone area. The solar zone shall be located on the roof or overhang of the building, or on the roof or overhang of another structure located within 250 feet of the building or on covered parking installed with the building project. Solar photovoltaic systems and solar thermal systems shall be installed in accord with: all applicable State code requirements, including access, pathway, smoke ventilation, and spacing requirements specified in CGR Title 24, Part 9; all applicable local code requirements; manufacturer's specifications; and the following performance requirements:
- (1) Solar photovoltaic systems. The total nameplate capacity of photovoltaic collectors shall be at least 10 Watts_{DC} per square foot of roof area allocated to the photovoltaic collectors.
- (2) Solar thermal systems: Single family residential solar domestic water heating systems shall be OG-300 System Certified by either the Solar Rating and Certification Corporation (SRCC) or the International Association of Plumbing and Mechanical Officials (IAPMO). Solar thermal systems installed in all Group R occupancy buildings other than single family residences shall use collectors with OG-100 Collector Certification by SRCC or IAPMO, shall be designed to generate annually at least 100 kBtu per square foot of roof area allocated to the solar thermal collectors. Systems with at least 500 square feet of collector area shall include a Btu meter installed on either the collector loop or potable water side of the solar thermal system.
- (d) Approval by the Planning Department of compliance with the Better Roof requirements, including the Living Roof alternative, as provided in Planning Code Section 149, shall be accepted for compliance with San Francisco Green Building Code Section 4.201.2(a) through (c). The requirements of CCR Title 24, Part 6, Section 110.10 for the solar zone shall still apply.

Chapter 5 NONRESIDENTIAL MANDATORY MEASURES Division 5.1

PLANNING AND DESIGN

SECTION 5.101—GENERAL

5.101.1 Modify the section as follows:

5.101.1 Scope. The provisions of this chapter outline planning, design and development methods that include environmentally responsible site selection, building design, building siting and development to protect, restore and enhance the environmental quality of the site, respect the integrity of adjacent properties and promote the health, safety and welfare of San Francisco residents.

5.103 Replace this section as follows:

SECTION 5.103 – REQUIREMENTS FOR GROUP A, B, I, E and M BUILDINGS

5.103.1 New large commercial buildings.

5.103.1.1 Rating requirement. Permit applicants must submit documentation to achieve LEED "Gold" certification.

5.103.1.2 Indoor water use reduction. Permit applicants must submit documentation verifying that project meets maximum prescriptive fixture flow rates in accordance with the California Plumbing Code. The project must also achieve the LEED WE Prerequisite Indoor Water Use Reduction (WEp2) and a minimum 30 percent reduction in the use of indoor potable water, as calculated to meet the LEED WE credit Indoor Water Use Reduction (WEc2).

5.103.1.3 Construction waste management. Permit applicants must submit documentation verifying the diversion of a minimum 75 percent of the project's construction and demolition waste, as calculated to meet LEED MR Prerequisite Construction and Demolition Waste Management Planning and LEED MR Credit Construction and Demolition Waste Management. Permit applicants must also meet the requirements of San Francisco Environment Code Chapter 14 and San Francisco Building Code Chapter 13B (Construction and Demolition Debris Recovery Program.) The waste management plan necessary to meet this requirement shall be updated as necessary and shall be accessible during construction for examination by the Department of Building Inspection.

5.103.1.4 Commissioning. Permit applicants must submit documentation verifying that the facility has been or will meet the criteria necessary to achieve CAL Green section 5.410.2 and Option 1 of LEED EA credit (Enhanced Commissioning), in addition to LEED EA Prerequisite (Fundamental Commissioning) and Verification.

5.103.1.6 Stormwater management. Projects subject to this section shall meet the San Francisco Public Utilities Commission stormwater management requirements. All new building projects must develop and implement an Erosion and Sediment Control Plan or Stormwater Pollution Prevention Plan and implement site run-off controls adopted by the San Francisco Public Utilities Commission as applicable.

5.103.1.7 Energy performance. [Reserved]

5.103.1.8 Temporary ventilation and IAQ management during construction. Permit applicants must submit documentation verifying that an Indoor Air Quality Management Plan is prepared and implemented which meets LEED EQ Credit Construction Indoor Air Quality Management and Title 24 Part 11 Sections 5.504.1 and 5.504.3.

5.103.1.9 Low-Emitting Materials. Permit applicants must submit documentation verifying that low-emitting materials are used, subject to on-site verification, meeting at least the following categories of materials covered under LEED EQ Credit Low-Emitting Materials wherever applicable: interior paints and coatings applied on-site, interior sealants and adhesives applied on site, flooring, and composite wood, 5.103.1.10 CALGreen mandatory measures. The following measures are mandatory in California for new non-residential buildings. Optionally, similar LEED credits can be used as alternative compliance paths,

as noted below:

· ·		<u> </u>
Title 24 Part 11 Section(s)	Topic/Requirement	Alternate Compliance Option:
5.106.8	Light pollution reduction	Meet LEED SS Credit Light Pollution Reduction
	Halons not allowed in HVAC,	Meet LEED EA Credit Enhanced Refrigerant
5.508.1,2	refrigeration and fire	Management, and additionally document that all
	suppression equipment.	HVAC&R systems do not contain CFCs or halons.

- 5.103.3 Major alterations to existing non residential buildings.
- 5.103.3.1 Rating requirement. Permit applicants must submit documentation to achieve LEED "Gold" certification.
- **5.103.3.2** Low emitting materials. Permit applicants must submit documentation verifying that low-emitting materials are used, subject to in-site verification, meeting at least the following categories of materials covered under LEED EQ Credit Low-Emitting Materials: interior paints and coatings applied on-site, interior scalants and adhesives applied on site, flooring, and composite wood.
- 5.103.3.3 Electric vehicle charging. Section 5.106.5.3 of this chapter shall apply to all newly constructed buildings and associated newly-constructed parking facilities for passenger vehicles and trucks, and to major alterations to existing Group A, B, I, and M occupancy buildings where electrical service to the building will be upgraded. In major alterations where existing electrical service will not be upgraded, all requirements under Section 5.106.5 shall apply to the maximum extent that:
 - (1) does not require upgrade to existing service; and
- (2) the Director does not determine that compliance with Section 5.106.5.3.3 and Title 24 Chapter 11B, if applicable, is technically infeasible, as defined in California Building Code Chapter 2, Section 202.
- 5.103.4 New large commercial interiors.
- 5.103.4.1 Rating requirement. Permit applicants must submit documentation to achieve LEED "Gold" certification.
- **5.103.4.2** Low emitting materials. Permit applicants must submit documentation verifying that low-emitting materials are used, subject to in-site verification, meeting at least the following categories of materials covered under LEED EQ Credit Low-Emitting Materials: interior paints and coatings applied on-site, interior sealants and adhesives applied on site, flooring, and composite wood.
- 5,104 Replace this section as follows:

SECTION 5.104 – HISTORIC PRESERVATION

5.104.1 On-site Retention of Historical Features. For alterations of buildings determined to be historical resources, after demonstrating compliance with all applicable codes, including the 2016 2019 California Building Energy Efficiency Standards (Title 24, Part 6) and the 2016 2019 California Historical Building Code (Title 24, Part 8), the minimum points or credits required under this chapter shall be reduced for retention and in-situ reuse or restoration of certain character defining features, as described in Table 5.104A. Retention includes the rehabilitation and repair of character-defining features that conform to the Secretary of the Interior's Standards for the Treatment of Historic Properties.

TABLE 5.104.A

	 <u> </u>			L.
SIGNIFICANT HISTORICAL ARCHITECTURAL FEATURES	PERCENT RETAINED*	ADJUSTMENT TO MINIMUM LEED POINT	ADJUSTMENT TO MINIMUM GREEN-POINTS	

	1	REQUIREMENT	REQUIREMENT
Windows @ principal façade(s)	100%	4	15
Other windows	At least 50%	1:	: 3
Other windows	100%	2	6
Exterior doors @ principal façade(s)	100%	. I	3
Siding or wall finish @ principal façade(s)	100%	1	4
Trim & casing @ wall openings on principal façade(s)	100%	1	3
Roof cornices or decorative eaves visible from right- of-way	100%	J	3
Sub-cornices, belt courses, water tables, and running trim visible from right-of-way	100%	1 :	3
Character-defining elements of significant interior spaces	100%	4	15'
Other exterior ornamentation (e.g. cartouches, corbels, quoins, etc.) visible from right-of-way	80%	1	3.

5.104.2. Adjustment to Green Credit for Retention of Historic Features. Where the historical resource is a portion of the total project, the LEED or GreenPoint Rated point requirement shall be adjusted to equal the percentage of gross floor area of the historical resource compared to the total project gross floor area.

5.105 Replace this section as follows:

SECTION 5.105 – DEMOLITION OF EXISTING STRUCTURES

- 5.105.1 Adjustments to rating requirements. Applications subject to the San Francisco Green Building Code, whereby construction of a new building is proposed within five years of the demolition of a building on the site, where such demolition occurred after November 3, 2008, the sustainability requirements for new buildings pursuant to the San Francisco Green Building Code shall be increased as follows:
- 5.105.1.1 LEED® projects. For projects attaining a LEED® certification:
- (1) Where the building demolished was an historical resource, the required points shall be increased by 10 points, which is 10% of the total available in the LEED® rating system, absent demolition.
- (2) Where the building demolished was not an historical resource, the required points shall be increased by 6 additional points, which is 10% of the maximum total required points under this chapter, absent demolition.
- (3) Where the building demolished was not an historical resource and the number of dwellings in the residential portion of the replacement structure are tripled, the required points shall be increased by 5 additional points, which is 8% of the maximum total required points under this chapter, absent demolition. 5.105.1.2 GreenPoint rated projects. For projects attaining GreenPoint Rated:
- (1) Where the building demolished was an historical resource, the required points shall be increased by 25 additional points.
- (2) Where the building demolished was not an historical resource, the required points shall be increased by 20 additional points.
- (3) Where the building demolished was not an historical resource and the number of dwellings in the residential portion of the replacement structure are tripled, the required points shall be increased by 17 additional points.

SECTION 5.106 - SITE DEVELOPMENT

5.106.5.3 Revise this section as follows:

5.106.5.3 Electric vehicle (EV) charging. In new construction and major alterations, 100% of off-street parking spaces in buildings and facilities provided for passenger vehicles and trucks shall be EV Spaces

capable of supporting future EVSE. Electrical engineering design and construction documents shall indicate the location of all proposed EV spaces. When EVSE is installed, it shall be in accordance with the San Francisco Building Code and the San Francisco Electrical Code.

5.106.5.3.1 Single charging space requirements: When a single EV Space is required per Section 5.106.5.3.3, install a full branch circuit with a minimum of 40-Amp 208 or 240 Volt capacity, including listed raceway, electrical panel capacity, overcurrent protection devices, wire, and suitable listed termination point such as a receptacle. The termination point shall be in close proximity to the proposed EV charger location. The raceway shall not be less than trade size 1 (nominal 1-inch inside diameter). The circuit shall be installed in accordance with the San Francisco Electrical Code and the San Francisco Building Code.

5.106.5.3.2 Multiple charging space requirements.

- (a) For a minimum of 10% of EV Spaces, and in no case less than two EV spaces when the total number of EV Spaces is two or more, install a full circuit with minimum of 40-Amp 208 or 240 Volt capacity per EV Space, including listed raceway, sufficient electrical panel service capacity, overcurrent protection devices, wire, and suitable listed termination point such as a receptacle. The termination point shall be in close proximity to the proposed EV charger location. Calculations for the number of EV Spaces shall be rounded up to the nearest whole number.
- (b) Branch circuit panelboard(s) shall be installed at each parking level with service capacity to deliver a minimum 40 amperes at 208 or 240 volts multiplied by 20% of the total number of EV Spaces. The panelboard(s) shall have sufficient space to install a minimum of one 40-ampere dedicated branch circuit and overcurrent protective device per EV Space up to a minimum of 20% of the total number of EV Spaces. The circuits and overcurrent protective devices shall remain reserved for exclusive use by electric vehicle charging.
 - (c) For all EV Spaces not required to install full circuits or raceways per Section 5.106.5.3.2(a):
 - (1) Either:
- (A) Provide space for future installation of additional electrical panelboards to support a 40 ampere 208 or 240 Volt capacity branch circuit and overcurrent protection device per EV Space, or equivalent consistent with Section 5.106.5.3.21; or
- (B) Provide space in installed electrical panelboard(s) to support installation of a 40 ampere 208 or 240 volt capacity branch circuit and overcurrent protection device per EV Space, or equivalent consistent with Section 5.106.5.3.2.1
- (2) Install raceway or sleeves where penetrations to walls, floors, or other partitions will be necessary to install panels, raceways, or related electrical components necessary for future installation of branch circuits. All such penetrations must comply with applicable codes, including but not limited to the San Francisco Electrical Code and the San Francisco Fire Code.
- (d) Construction documents, including electrical engineering and design related documents, shall demonstrate the electrical service capacity of the electrical system, including any on-site distribution transformer(s), can charge EVSE at a minimum of 20% of the total number of EV Spaces simultaneously, at the full rated amperage of the EVSE or a minimum of 40 amperes per branch circuit, whichever is greater. As appropriate, construction documents shall provide information on raceway method(s), wiring schematics, anticipated EV load management system design(s), and electrical load calculations.

Exceptions.

- 1. Where there is no commercial power supply.
- 2. Where there is evidence substantiating that meeting the requirements will alter the local utility infrastructure design requirements directly related to the implementation of this Section may increase the utility side cost to the developer by more than \$400 per parking space. In such cases, buildings subject to Section 5.106.5.3.2 shall maximize the number of EV Spaces, up to a maximum utility side cost of \$400 per space. Cost shall be determined by dividing the increase in local utility infrastructure cost attributable to compliance with this section by the sum of parking spaces and Electric Vehicle Charging Spaces.
- 3. In major alterations, where there is evidence substantiating that meeting the requirements of this section present an unreasonable hardship or is technically infeasible, the Director may upon request from the project sponsor consider an appeal to reduce the number of EV Spaces required.

Note: This section does not require installation of EYSE

The intent of sizing electrical service to provide 40 amperes at 208 or 240 Volts to at least 20% of spaces simultaneously is to provide the option to utilize listed EV Load Management Systems to provide Level 2 EV charging at 100% of parking spaces. A listed EV Load Management system manages the available capacity in a safe manner, such as allocating 36 amperes at 208 or 240 volts to vehicles in 20% of the total number of EV Charging Stations simultaneously, or allocating 8 amperes to vehicles in 100% of parking spaces, or similar. Given the capacity required by this Section, individual EV chargers may be installed in up to 20% of parking spaces before an EV load management system is necessary.

5.106.5.3.2 Add the following section.

5.106.5.3.2.1 Electric vehicle (EV) fast charging spaces.

(a) Installation of one EV Fast Charger may reduce the number of EV Spaces required under Section 5.106.5.3.2(a) by up to 10 EV Spaces, provided the project includes at least one EV Space equipped with a full circuit able to deliver 40 Amps at 208 or 240 volts to the EV Space, including listed raceway, sufficient electrical panel capacity, overcurrent protection devices, wire, and suitable listed termination point such as a receptacle.

The electrical panel board(s) provided at each parking level served by EV Fast Chargers shall have sufficient capacity to supply each Electric Vehicle fast charger with a minimum of 30 kW AC in addition to the capacity to serve any remaining EV spaces with a minimum of 8-amperes at 208 or 240 volts per EV Space simultaneously, with a minimum of 40 amperes per circuit.

(b) After the requirements of 5.106.5.3.2(a) and (b) are met, each planned EV Fast Charger may reduce the number of planned EV Spaces required under 5.106.5.3.2(c) by up to 10 spaces. Electrical engineering design and construction documents shall indicate the raceway termination point and proposed location of future EV Fast Charger Spaces and EV Fast Chargers. Electrical engineering design and construction documents shall also provide information on amperage of EV Fast Chargers, raceway method(s), and wiring schematics. Electrical engineering design and construction documents shall also provide electrical load calculations to verify that the electrical panel service capacity and electrical system has sufficient capacity to simultaneously operate all installed EV Fast Chargers with the full rated amperage of the EV fast charger(s), and simultaneously serve a minimum of 40 amps per branch circuit to any remaining EV spaces required by Section 5.106.5.3.2(a). Raceways and related components that are planned to be installed in underground,

enclosed, inaccessible, or otherwise concealed areas or spaces, shall be installed at the time of original construction.

5,106,5,3.3 Revise this section as follows:

5.106.5.3.3 EV Space slope, dimensions, and location. Design and construction documents shall indicate how many accessible EVCS would be required under Title 24 Chapter 11B Table 11B-228.3.2.1, if applicable, in order to convert all EV Spaces required under 5.106.5.3.2 to EVCS, excluding the exceptions in 5.106.5.3.2. Design and construction documents shall also demonstrate that the facility is designed so that compliance with accessibility standards will be feasible for accessible EV Spaces at the time of EVCS installation. Surface slope for any area designated for accessible EV Spaces shall meet slope requirements in section 11B-812.3 at the time of original building construction and vertical clearance requirements in Section 11B-812-4, if applicable.

Exception: Accessibility requirements of Section 5.106.5.3.3 shall not apply to buildings that are not covered under Title 24 Part 2 Chapter 11B. In addition, all applicable exceptions to Chapter 11B shall apply to this Section 5.106.5.3.3.

Note: Section 5.106.5.3.3, above, requires that the project be prepared to comply with accessibility requirements applicable at the time of EVSE installation. Section 11B-812 of the 2016-2019 California Building Code requires that a facility providing EVCS for public and common use also provide one or more accessibility EVCS as specified in Table 11B-228-3.2.1. Chapter 11B regulates accessibility in certain buildings and facilities, including but not limited to accessibility in public buildings, public accommodations, commercial buildings, and publicly funded housing (see section 1.9 of Part 2 of the California Building Code). Section-11B-812.4 requires that "Parking spaces, access aisles and vehicular routes serving them shall provide a vertical clearance of 98 inches (2489 mm) minimum." Section 11B-812.3 requires that parking spaces and access aisles meet maximum slope requirements of 1 unit vertical in 48 units horizontal (2.083% slope) in any direction at the time of new building construction or renovation. Section 11B-812.5 contains accessible route requirements.

5.106.5.3.4 Revise this section as follows:

5.106.5.3.4 Identification. The service panel or subpanel(s) circuit directory shall identify the reserved overcurrent protective device space(s) for future EV charging as "EVSE READY" for full circuits and otherwise "EVSE CAPABLE." The raceway termination location or receptacle shall be permanently and visibly marked as "EVSE READY" for full circuits and otherwise "EVSE CAPABLE" until such time as EVSE are installed.

Division 5.2

ENERGY EFFICIENCY

SECTION 5.201 – GENERAL

5.201 Add the following sections:

5.201.1.1 Energy performance. [Reserved]

5.201.1.2. Renewable energy and better roofs.

(a) Newly constructed buildings of nonresidential occupancy which are 2000 square feet or greater in

gross floor area, are of 10 or fewer occupied floors, and apply for a building permit on or after January 1, 2017 shall install solar photovoltaic systems and/or solar thermal systems in the solar zone required by California Title 24, Part 6 Section 110.10.

- (b) The required solar zone area for the project shall be calculated under California Code of Regulations (CCR), Title 24, Part 6, Section 110.10(b) through (e), and Nonresidential Compliance Manual Chapter 9, as provided below:
- (1) Buildings subject to Planning Code Section 149 may apply Exception 5 to Title 24, Part 6, Section 110.10(b)1B in the calculation of the minimum solar zone area and may not apply Exceptions 1, 2, 3, and 4 in the calculation.
- (2) Buildings not subject to Planning Code Section 149 may apply Exceptions 3 and 5 in the calculation of the minimum solar zone area and may not apply Exceptions 1, 2, and 4 in the calculation. Such buildings with a calculated minimum solar zone area of less than 150 contiguous square feet due to limited solar access under Exception 3 are exempt from the solar energy requirements in this Section 5.201.1.2.
- (c) The sum of the areas occupied by solar photo-voltaic collectors and/or solar thermal collectors must be equal to or greater than the solar zone area. The solar zone shall be located on the roof or overhang of the building, or on the roof or overhang of another structure located within 250 feet of the building or on covered parking installed with the building project. Solar photo-voltaic systems and solar thermal systems shall be installed in accord with all applicable state and local code requirements, manufacturer's specifications, and the following performance requirements:
- (1) Solar photovoltaic systems: The total nameplate capacity of photovoltaic collectors shall be at least 10 Wattspc per square foot of roof area allocated to the photovoltaic collectors.
- (2) Solar thermal systems: Solar thermal systems installed to serve non-residential building occupancies shall use collectors with OG-100 Collector Certification by the Solar Rating and Certification Corporation (SRCC) or the International Association of Plumbing and Mechanical Officials (IAPMO), shall be designed to generate annually at least 100 kBfu per square foot of roof area allocated to the solar thermal collectors, and, for systems with at least 500 square feet of collector area, shall include a Btu meter installed on either the collector loop or potable water side of the solar thermal system.
- (d) Approval by the Planning Department of compliance with the Better Roof requirements, including the Living Roof alternative, as provided in Planning Code Section 149, shall be accepted for compliance with San Francisco Green Building Code Section 5.201. [22] through (c). The requirements of CCR Title 24, Part 6, Section 110.10 for the solar zone shall still apply.
- 5.201.1.3 Renewable energy. Permit applicants constructing new buildings of 11 floors or greater must submit documentation verifying either.
- (1) Acquisition of renewable on-site energy (demonstrated via EA Credit Renewable Energy Production) or purchase of green energy credits (demonstrated via EA Credit Green Power and Carbon Offsets) OR
- (2) Enhance energy efficiency (demonstrated via at least 5 LEED points under EA Credit Optimize Energy Performance) in addition to compliance with Title 24 Part 6 2016 2019 California Energy Standards.

Chapter 7

INSTALLER AND SPECIAL INSPECTOR QUALIFICATIONS

SECTION 701 - GENERAL

701.1 Add the following section:

701.1 These requirements apply to installers and Special inspectors with regards to the requirements of this chapter.

SECTION 702 – QUALIFICATIONS

702 Modify the following section:

702.2 Special inspection....

- 2. Certification by a statewide energy consulting or verification organization, such as HERS raters, building performance contractors, home energy auditors, and ICC Certified CALGreen Inspectors.

 702.3 Add the following section:
- 702.3 Special inspection. The Director of the Department of Building Inspection may require special inspection to verify compliance with this code or other laws that are enforced by the agency. The special inspector shall be a qualified person who shall demonstrate competence, to the satisfaction of the Director of the Department of Building Inspection, for inspection of the particular-type of construction or operation requiring special inspection. In addition, the special inspector shall have a certification from a recognized state, national, or international association, as determined by the Director of the Department of Building Inspection. The area of certification shall be closely related to the primary job function, as determined by the local agency.

SECTION 7.703 – VERIFICATIONS

703.1 Modify the section as follows:

703.1 Documentation. Documentation used to show compliance with this code shall include but is not limited to, construction documents, plans, specifications, builder or installer certification, inspection reports, or other methods acceptable to the Director of the Department of Building Inspection which demonstrate substantial conformance. When specific documentation or special inspection is necessary to verify compliance, that method of compliance will be specified in Administrative Bulletin 93.

n:\legana\as2019\1900415\01392963.docx

EXHIBIT A

STANDARD FINDINGS FOR SAN FRANCISCO BUILDING STANDARDS CODE AMENDMENTS

- Certain buildings/occupancies in San Francisco are at increased risk for earthquake-induced failure and consequent fire due to local hazardous microzones, slide areas, and local liquefaction hazards. (Geology)
- 2. Certain buildings/occupancies in San Francisco are at increased risk of fire due to high density of buildings on very small lots, with many buildings built up to the property lines. (Topography)
- 3. Topography of San Francisco has let to development of a high density of buildings on small lots, necessitating special provisions for exiting, fire separation, or fire-resistive construction. (Topography)
- 4. Many buildings are built on steep hills and narrow streets, requiring special safety consideration. (Topography)
- 5. Additional fire, structural and other protection is required due to high building density and crowded occupancy. (Topography)
- 6. San Francisco has narrow, crowded sidewalks due to building and population density and unusual topography. (Topography)
- 7. All rain water in San Francisco drains to the building drains and sewer; unusual geology, occasional extremely high local rainfall amounts, and the configuration of the City as a peninsula restrict the installation of separate storm water and sewer systems. (Topography, Climate, Geology)
- 8. Moist, corrosive atmosphere of salt-laden fog in San Francisco necessitates additional requirements. (Climate)
- 9. Not a building standard; no local findings required.
- Soil conditions in this region induce adverse reactions with some materials, leading to premature failures and subsequent unsanitary conditions. (Climate)
- 11. The region is subject to fluctuating rainfall due to changes in climatic conditions. (Climate)

- 12. San Francisco is a peninsula surrounded on three sides by water at sea level; mitigation of climate change impacts, including sea level rise, is critical to the long term protection of the local built environment and local infrastructure. (Topography)
- 13. Climate and potential climate change impacts San Francisco's water resources, including reservoirs and distribution facilities. (Climate)
- 14. Organic material in San Francisco's waste breaks down into methane gas which is a significant contributor to climate change. (Climate)
- 15. San Francisco is topographically constrained and its built environment occupies most available land, requiring minimization of debris and solid waste. (Topography)
- 16. Prevailing winds, coastal mountain ranges, and periodic seasonal high temperatures contribute to photochemical reactions that produce smog and ozone; limiting the emission of smog's chemical precursors volatile organic chemicals and oxides of nitrogen is necessary to health and safety. (Climate, Topography)
- 17. The aquifers underlying San Francisco are small relative to local population, necessitating ongoing water imports and special provisions to ensure efficient use of water in local buildings. (Geology)

2019 San Francisco Green Building Code Findings

Section # I maing # Section # I maing #	Section#	Finding #	Section #	Finding #	Section #	Finding #
---	----------	-----------	-----------	-----------	-----------	-----------

CHAPTER 1

Section #	Finding #	Section#	Finding#	Section #	Finding #	1
101.1	9	101.4	9	101.10	9	$\overline{}$
101.2	9	101.6.1	9	101.11	9	٦
101.3	9	101.6.3	9	-		٦
101.3.1	9	101.7	9		·	

CHAPTER 2

Section #	Finding #	Section #	Finding #	Section #	Finding #
202	9				

CHAPTER 3

Section#	Finding #	Section #	Finding #	Section #	Finding #
301.1	9				
302.1	9				
303.1.1.1	9				

CHAPTER 4

	CHAPTER							
Section #	Finding #	Section #	Finding #	Section #	Finding #			
4.101.1	9.	4.103.3.2	4,5,17	4.106.4.1	12,14,15			
4.103.1	9	4.103.3.3	12,14,15	4.106.4.1.1	12,14,15			
4.103.1.1	5,7,11,12,13, 14,15,16,17	4.104.1	12,14,15	4.106.4.2	12,14,15			
4.103.1.2	7;11	TABLE 4.104.A	12,14,15	4.106.4.2.1	12,14,15			
4.103.2	9	4.104.2	9	4.106.4.2.2	12,14,15			
4.103.2.1	5,7,11,12,13, 14,15,16,17	4.105	9	4.106.4.2.3	12,14,15			
4.103.2.3	14,15	4.105.1	12,14,15	4.106.4.2.4	12,14,15			
4.103.2.4	7,11	4.105.1.1	12,14,15	4.106.4.2.4.1	12,14,15			
4.103.2.4.1	7,11	4.105.1.2	12,14,15	4.106.4.2.5	12,14,15			
4.103.3	9	4.106	9	4.201.2	12			
4.103.3.1	5,7,11,12,13, 14,15,16,17	4.106.4	12,14,15					

CHAPTER 5

Section #	Finding #	Section #	Finding #	Section #	Finding #			
5.101.1		5.103.3.2	E 9 14 1E 16	5.106.5.3.2.1	10 14 15			
	9 ·		0,0,14,10,10	 				
5.103.1	9	5.103.4	9	5.106.5.3.3	12,14,15			

3


	5, 7,11,12,13,		5,7,11,12,13,		
5.103.1.1	14,15,16,17	5.103.4.1	14,15,16,17	5.106.5.3.4	12,14,15
5.103.1.2	11,13,17	5.103.4.2	5,8,14,15,16	5.201.1.1	3,5,14
5.103.1.3	14,15	5.104.1	14,15	5.201.1.2	3,5,14
		Table			
5.103.1.4	12	5.104.A	14,15	5.201.1.3	3,5,14
5.103.1.6	7,11	5.104.2	9		
5.103.1.7	9	5.105.1	14,15	,	
5.103.1.8	5,8,14,15,16	5.105.1.1	14,15		
5.103.1.9	5,8,14,15,16	5.105.1.2	14,15		
5.103.1.10	9	5.106.5.3	12,14,15		
5.103.3	9	5.106.5.3.1	12,14,15		
	5,7,11,12,13,				
5.103.3.1	14,15,16,17	5.106.5.3.2	12,14,15		

CHAPTER 6 NO S.F. AMENDMENTS

CHAPTER 7

				<u>.</u> ,	
Section #	Finding #	Section #	Finding #	Section #	Finding #
701.1	9	702.3	5	703.1	9
702.2	9				

n:\legana\as2019\1900415\01393355.doc

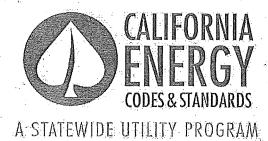

Title 24, Parts 6 and 11 Local Energy Efficiency Ordinances

2019 Nonresidential New Construction Reach Code Cost Effectiveness Study

Prepared for: Christopher Kuch Codes and Standards Program Southern California Edison Company


> Prepared by: TRC EnergySoft

Last Modified: July 25, 2019









LEGAL NOTICE

This report was prepared by Southern California Edison Company (SCE) and funded by the California utility customers under the auspices of the California Public Utilities Commission.

Copyright 2019, Southern California Edison Company. All rights reserved, except that this document may be used, copied, and distributed without modification.

Neither SCE nor any of its employees makes any warranty, express or implied; or assumes any legal liability or responsibility for the accuracy, completeness or usefulness of any data, information, method, product, policy or process disclosed in this document; or represents that its use will not infringe any privately-owned rights including, but not limited to, patents, trademarks or copyrights.

Table of Contents

1	Introdu	ction	1
2	Method	dology and Assumptions	3
	2.1 Bu	ilding Prototypes	3
	2.2 Co	st Effectiveness	5
3	Measur	e Description and Cost	7
	3.1 En	ergy Efficiency Measures	
	3.1.1	Envelope	
	3.1.2	HVAC and SWH	8
	3.1.3	Lighting	9
	3.2 So	lar Photovoltaics and Battery Measures	13
	3.2.1	Solar Photovoltaics	13
	3.2.2	Battery Storage	15
	3.2.3	PV-only and PV+Battery Packages	16
	3.3 All	Electric Measures	16
	3.3.1	HVAC and Water Heating	
	3.3.2	Infrastructure Impacts	20
	3.4 Pre	eempted High Efficiency Appliances	
		eenhouse Gas Emissions	
4	Results		23
	4.1 Co	st Effectiveness Results – Medium Office	24
		st Effectiveness Results – Medium Retail	
		ost Effectiveness Results – Small Hotel	
	4.4 Co	ost Effectiveness Results – PV-only and PV+Battery	50
5	Summa	ry, Conclusions, and Further Considerations	55
	5.1 Su	mmary	55
		onclusions and Further Considerations	
6		lices	
		ap of California Climate Zones	
		ghting Efficiency Measures	
		ain Water Heat Recovery Measure Analysis	
		ility Rate Schedules	
		ixed Fuel Baseline Energy Figures	
		otel TDV Cost Effectiveness with Propane Baseline	
	6.7 PV	/-only and PV+Battery-only Cost Effectiveness Results Details	
	6.7.1	Cost Effectiveness Results – Medium Office	
	6.7.2	Cost Effectiveness Results – Medium Retail	
	6.7.3	Cost Effectiveness Results – Small Hotel	88
	6.8 Lis	st of Relevant Efficiency Measures Explored	97
	69 Ad	dditional Rates Analysis - Healdshurg	102

List of Figures

Figure 1. Measure Category and Package Overview	2
Figure 2. Prototype Characteristics Summary	4
Figure 3. Utility Tariffs used based on Climate Zone	6
Figure 4. Energy Efficiency Measures - Specification and Cost	10
Figure 5. Medium Office – Annual Percent kWh Offset with 135 kW Array	
Figure 6. Medium Retail – Annual Percent kWh Offset with 110 kW Array	14
Figure 7. Small Hotel – Annual Percent kWh Offset with 80 kW Array	
Figure 8. Medium Office Upfront PV Costs	
Figure 9. All-Electric HVAC and Water Heating Characteristics Summary	
Figure 10. Medium Office HVAC System Costs	
Figure 11. Medium Retail HVAC System Costs	
Figure 12. Small Hotel HVAC and Water Heating System Costs	
Figure 13. Medium Office Electrical Infrastructure Costs for All-Electric Design	
Figure 14. Natural Gas Infrastructure Cost Savings for All-Electric Prototypes	
Figure 15. High Efficiency Appliance Assumptions	
Figure 16. Package Summary	
Figure 17. Cost Effectiveness for Medium Office Package 1A – Mixed-Fuel + EE	
Figure 18. Cost Effectiveness for Medium Office Package 1B – Mixed-Fuel + EE + PV + B	
Figure 19. Cost Effectiveness for Medium Office Package 1C – Mixed-Fuel + HE	
Figure 20. Cost Effectiveness for Medium Office Package 2 – All-Electric Federal Code Minimum	
Figure 21. Cost Effectiveness for Medium Office Package 3A – All-Electric + EE	
Figure 22. Cost Effectiveness for Medium Office Package 3B – All-Electric + EE + PV + B	
Figure 23. Cost Effectiveness for Medium Office Package 3C – All-Electric + HE	
Figure 24. Cost Effectiveness for Medium Retail Package 1A – Mixed-Fuel + EE	
Figure 25. Cost Effectiveness for Medium Retail Package 1B – Mixed-Fuel + EE + PV + B	
Figure 26. Cost Effectiveness for Medium Retail Package 1C – Mixed-Fuel + HE	
Figure 27. Cost Effectiveness for Medium Retail Package 2 – All-Electric Federal Code Minimum	
Figure 28. Cost Effectiveness for Medium Retail Package 3A – All-Electric + EE	
Figure 29. Cost Effectiveness for Medium Retail Package 3B – All-Electric + EE + PV + B	
Figure 30. Cost Effectiveness for Medium Retail Package 3C – All-Electric + HE	
Figure 31. Cost Effectiveness for Small Hotel Package 1A – Mixed-Fuel + EE	
Figure 32. Cost Effectiveness for Small Hotel Package 1B – Mixed-Fuel + EE + PV + B	
Figure 33. Cost Effectiveness for Small Hotel Package 1C – Mixed-Fuel + HE	
Figure 34. Cost Effectiveness for Small Hotel Package 2 – All-Electric Federal Code Minimum	
Figure 35. Cost Effectiveness for Small Hotel Package 3A – All-Electric + EE	
Figure 36. Cost Effectiveness for Small Hotel Package 3B – All-Electric + EE + PV + B	
Figure 37. Cost Effectiveness for Small Hotel Package 3C – All-Electric + HE	
Figure 38. Cost Effectiveness for Medium Office - PV and Battery	
Figure 39. Cost Effectiveness for Medium Retail - PV and Battery	
Figure 40. Cost Effectiveness for Small Hotel - PV and Battery	
Figure 41. Medium Office Summary of Compliance Margin and Cost Effectiveness	
Figure 42. Medium Retail Summary of Compliance Margin and Cost Effectiveness	
Figure 44. Man of Colifornia Climate Zones	
Figure 44. Map of California Climate Zones	
rigure 45. Impact of Lighting Measures on Proposed LPDs by Space Function	

Figure 46. Utility Tariffs Analyzed Based on Climate Zone – Detailed View62
Figure 47. Medium Office – Mixed Fuel Baseline
Figure 48. Medium Retail – Mixed Fuel Baseline
Figure 49. Small Hotel – Mixed Fuel Baseline
Figure 50. TDV Cost Effectiveness for Small Hotel, Propane Baseline – Package 2 All-Electric Federal Code
Minimum66
Figure 51. TDV Cost Effectiveness for Small Hotel, Propane Baseline – Package 3A (All-Electric + EE)67
Figure 52. TDV Cost Effectiveness for Small Hotel, Propane Baseline – Package 3B (All-Electric + EE + PV) 67
Figure 53. TDV Cost Effectiveness for Small Hotel, Propane Baseline – Package 3C (All Electric + HE)68
Figure 54. Cost Effectiveness for Medium Office - Mixed Fuel + 3kW PV71
Figure 55. Cost Effectiveness for Medium Office – Mixed Fuel + 3kW PV + 5 kWh Battery72
Figure 56. Cost Effectiveness for Medium Office – Mixed Fuel + 135kW PV73
Figure 57. Cost Effectiveness for Medium Office – Mixed Fuel + 135kW PV + 50 kWh Battery74
Figure 58. Cost Effectiveness for Medium Office – All-Electric + 3kW PV75
Figure 59. Cost Effectiveness for Medium Office – All-Electric + 3kW PV + 5 kWh Battery76
Figure 60. Cost Effectiveness for Medium Office – All-Electric + 135kW PV77
Figure 61. Cost Effectiveness for Medium Office – All-Electric + 135kW PV + 50 kWh Battery78
Figure 62. Cost Effectiveness for Medium Retail – Mixed-Fuel + 3kW PV80
Figure 63. Cost Effectiveness for Medium Retail – Mixed Fuel + 3kW PV + 5 kWh Battery81
Figure 64. Cost Effectiveness for Medium Retail – Mixed-Fuel + 110kW PV82
Figure 65. Cost Effectiveness for Medium Retail – Mixed-Fuel + 110 kW PV + 50 kWh Battery83
Figure 66. Cost Effectiveness for Medium Retail – All-Electric + 3kW PV84
Figure 67. Cost Effectiveness for Medium Retail – All-Electric + 3kW PV + 5 kWh Battery85
Figure 68. Cost Effectiveness for Medium Retail – All-Electric + 110kW PV86
Figure 69. Cost Effectiveness for Medium Retail – All-Electric + 110kW PV + 50 kWh Battery87
Figure 70. Cost Effectiveness for Small Hotel – Mixed Fuel + 3kW PV89
Figure 71. Cost Effectiveness for Small Hotel – Mixed Fuel + 3kW PV + 5 kWh Battery90
Figure 72. Cost Effectiveness for Small Hotel - Mixed Fuel +80kW PV91
Figure 73. Cost Effectiveness for Small Hotel – Mixed Fuel + 80kW PV + 50 kWh Battery92
Figure 74. Cost Effectiveness for Small Hotel – All-Electric + 3kW PV93
Figure 75. Cost Effectiveness for Small Hotel – All-Electric + 3kW PV + 5 kWh Battery94
Figure 76. Cost Effectiveness for Small Hotel – All-Electric + 80kW PV95
Figure 77. Cost Effectiveness for Small Hotel – All-Electric + 80kW PV + 50 kWh Battery96
Figure 78. List of Relevant Efficiency Measures Explored
Figure 79. Healdsburg Utility Rates Analysis – Medium Office, All Packages Cost Effectiveness Summary103
Figure 80. Healdsburg Utility Rates Analysis – Medium Retail, All Packages Cost Effectiveness Summary 104
Figure 81, Healdsburg Utility Rates Analysis — Small Hotel, All Packages Cost Effectiveness Summary 105

1 Introduction

The California Building Energy Efficiency Standards Title 24, Part 6 (Title 24) (CEC, 2019) is maintained and updated every three years by two state agencies: the California Energy Commission (the Energy Commission) and the Building Standards Commission (BSC). In addition to enforcing the code, local jurisdictions have the authority to adopt local energy efficiency ordinances—or reach codes—that exceed the minimum standards defined by Title 24 (as established by Public Resources Code Section 25402.1(h)2 and Section 10-106 of the Building Energy Efficiency Standards). Local jurisdictions must demonstrate that the requirements of the proposed ordinance are cost-effective and do not result in buildings consuming more energy than is permitted by Title 24. In addition, the jurisdiction must obtain approval from the Energy Commission and file the ordinance with the BSC for the ordinance to be legally enforceable. This report was developed in coordination with the California Statewide Investor Owned Utilities (IOUs) Codes and Standards Program, key consultants, and engaged cities—collectively known as the Reach Code Team.

This report documents cost-effective combinations of measures that exceed the minimum state requirements for design in newly-constructed nonresidential buildings. Buildings specifically examined include medium office, medium retail, and small hotels. Measures include energy efficiency, solar photovoltaics (PV), and battery storage. In addition, the report includes a comparison between a baseline mixed-fuel design and all-electric design for each occupancy type.

The Reach Code team analyzed the following seven packages as compared to 2019 code compliant mixedfuel design baseline:

- Package 1A Mixed-Fuel + Energy Efficiency (EE): Mixed-fuel design with energy efficiency measures and federal minimum appliance efficiencies.
- ♦ Package 1B Mixed-Fuel + EE + PV + Battery (B): Same as Package 1A, plus solar PV and batteries.
- Package 1C Mixed-fuel + High Efficiency (HE): Baseline code-minimum building with high efficiency appliances, triggering federal preemption. The intent of this package is to assess the standalone contribution that high efficiency appliances would make toward achieving high performance thresholds.
- Package 2 All-Electric Federal Code-Minimum Reference: All-electric design with federal code minimum appliance efficiency. No solar PV or battery.
- Package 3A All-Electric + EE: Package 2 all-electric design with energy efficiency measures and federal minimum appliance efficiencies.
- ♦ Package 3B All-Electric + EE + PV + B: Same as Package 3A, plus solar PV and batteries.
- Package 3C All-Electric + HE; All-electric design with high efficiency appliances, triggering federal preemption.

Figure 1 summarizes the baseline and measure packages. Please refer to Section 3 for more details on the measure descriptions.



Figure 1. Measure Category and Package Overview

	A	iguite az pa	Jasus	<i>eaucgus</i> y	anuracka	ige Overvi	CVV	4 4 75	. 12
7 - 7 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 -	Mixed Fuel				All-Electric				
north and an		Baseline	1A	1B	1C	2	3A	3B	3C
Measure Category	Report Section	Fed Code Minimum Efficiency	EE	EE+ PV + B	ĤĔ	Fed Code Minimum Efficiency	EE	EE+ PV + B	ΗĒ
Energy Efficiency Measures	3.1		X	X			X	×	
Solar PV # Battery	3.2		:	X		-1 - 1	:	Х	
All-Electric Measures	3.3				1	X	X	X	X
Preemptive Appliance Measures	3.4		1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1		X.	:	:		×

The team separately developed cost effectiveness results for PV-only and PV+Battery packages, excluding any efficiency measures. For these packages, the PV is modeled as a "minimal" size of 3 kW and a larger size based on the available roof area and electric load of the building. PV sizes are combined with two sizes of battery storage for both mixed fuel and all electric buildings to form eight different package combinations as outlined below:

- Mixed-Fuel + 3 kW PV Only
- ♦ Mixed-Fuel + 3 kW PV + 5 kWh Battery
- Mixed-Fuel + PV Only: PV sized per the roof size of the building, or to offset the annual electricity consumption, whichever is smaller
- Mixed-Fuel + PV + 50 kWh Battery: PV sized per the roof size of the building, or to offset the annual electricity consumption, whichever is smaller, along with 50 kWh battery.
- All-Electric + 3 kW PV Only
- ♦ All-Electric + 3 kW PV + 5 kWh Battery
- All-Electric + PV Only: PV sized per the roof size of the building, or to offset the annual electricity
 consumption, whichever is smaller
- All-Electric + PV + 50 kWh Battery: PV sized per the roof size of the building, or to offset the annual electricity consumption, whichever is smaller, along with 50 kWh battery.

Each of the eight packages are evaluated against a baseline model designed as per 2019 Title 24 Part 6 requirements. The Standards baseline for all occupancies in this report is a mixed-fuel design.

The Department of Energy (DOE) sets minimum efficiency standards for equipment and appliances that are federally regulated under the National Appliance Energy Conservation Act (NAECA), including heating, cooling, and water heating equipment.

1 Since state and local governments are prohibited from adopting

bin/retrieveECFR?gp=&SID=8de751f141aaa1c1c9833b36156faf67&mc=true&n=pt10.3.431&r=PART&ty=HTML#se10.3.431_197



¹ https://www.ecfr.gov/cgl-

higher minimum efficiencies than the federal standards require, the focus of this study is to identify and evaluate cost-effective packages that do not include high efficiency equipment. However, because high efficiency appliances are often the easiest and most affordable measures to increase energy performance, this study provides an analysis of high efficiency appliances for informational purposes. While federal preemption would limit a reach code; in practice, builders may install any package of compliant measures to achieve the performance requirements, including higher efficiency appliances that are federally regulated.

2 Methodology and Assumptions

With input from several stakeholders, the Reach Codes team selected three building types—medium office, medium retail, and small hotel—to represent a predominant segment of nonresidential new construction in the state.

This analysis used both on-bill and time dependent valuation of energy (TDV) based approaches to evaluate cost-effectiveness. Both methodologies require estimating and quantifying the energy savings associated with energy efficiency measures, as well as quantifying the costs associated with the measures. The main difference between the methodologies is the valuation of energy and thus the cost savings of reduced or avoided energy use. TDV was developed by the Energy Commission to reflect the time dependent value of energy including long-term projected costs of energy such as the cost of providing energy during peak periods of demand and other societal costs including projected costs for carbon emissions. With the TDV approach, electricity used (or saved) during peak periods has a much higher value than electricity used (or saved) during off-peak periods.²

The Reach Code Team performed energy simulations using EnergyPro 8.0 software for 2019 Title 24 code compliance analysis, which uses CBECC-Com 2019.1.0 for the calculation engine. The baseline prototype models in all climate zones have been designed to have compliance margins as close as possible to 0 to reflect a prescriptively-built building.³

2.1 Building Prototypes

The DOE provides building prototype models which, when modified to comply with 2019 Title 24 requirements, can be used to evaluate the cost effectiveness of efficiency measures. These prototypes have historically been used by the California Energy Commission to assess potential code enhancements. The Reach Code Team performed analysis on a medium office, a medium retail, and a small hotel prototype.

Water heating includes both service water heating (SWH) for office and retail buildings and domestic hot water for hotels. In this report, water heating or SWH is used to refer to both. The Standard Design HVAC and SWH systems are based on the system maps included in the 2019 Nonresidential Alternate

³ EnergySoft and TRC were able to develop most baseline prototypes to achieve a compliance margin of less than +/-1 percent except for few models that were at +/- 6 percent. This indicates these prototypes are not exactly prescriptive according to compliance software calculations. To calculate incremental impacts, TRC conservatively compared the package results to that of the proposed design of baseline prototypes (not the standard design).



² Hörli, B., E. Cutter, N. Kapur, J. Arent, and D. Conotyannis. 2014. "Time Dependent Valuation of Energy for Developing Building. Energy Efficiency Standards." Available at: http://www.energy.ca.gov/title24/2016standards/prerulemaking/documents/2014-07-09 workshop/2017 TDV Documents

Calculation Method Reference Manual. The Standard Design is the baseline for all nonresidential projects and assumes a mixed-fuel design using natural gas as the space heating source in all cases. Baseline HVAC and SWH system characteristics are described below and in Figure 2:

- The baseline medium office HVAC design package includes two gas not water boilers, three packaged rooftop units (one for each floor), and variable air volume (VAV) terminal boxes with not water reheat coils. The SWH design includes one 8.75 kW electric resistance hot water heater with a 30-gallon storage tank.
- ♦ The baseline medium retail HVAC design includes five single zone packaged rooftop units (variable flow and constant flow depending on the zone) with gas furnaces for heating. The SWH design includes one 8.75 kW electric resistance hot water heater with a 30-gallon storage tank.
- The small hotel has two baseline equipment systems, one for the nonresidential spaces and one for the guest rooms.
 - The nonresidential HVAC design includes two gas not water boilers, four packaged rooftop units and twelve VAV terminal boxes with hot water reheat coils. The SWH design include a small electric resistance water heater with 30-gallon storage tank.
 - The residential HVAC design includes one single zone air conditioner (AC) unit with gas furnace for each guest room and the water heating design includes one central gas water heater with a recirculation pump for all guest rooms.

Figure 2. Prototype Characteristics Summary

	Medium Office	Medium Retail	Small Hotel
Conditioned Floor Area	53,628	24,691	42,552
Number of Stories	3	1 :	4
Number of Guest Rooms	0	0	78
Window-to-Wall Area Ratio	0.33	0.07	0,11
i i i i i i i i i i i i i i i i i i i	Packaged DX VAV with gas	4	Nonresidential: Packaged DX VAV with hot water coil + VAV
Baseline HVAC System	furnaces + VAV terminal units with hot water reheat. Central gas hot water	Single zone packaged DX units with gas furnaces	terminal units with hot water reheat. Central gas hot water boilers.
	bollers	, 14()140C3	Residential: Single zone DX AC unit with gas furnaces
Baseline Water Heating System	30-gallon electric resistance water heater	30-gallon electric resistance water heater	Nonresidential: 30-gallon electric resistance water heater Residential: Central gas water heater with recirculation loop

A Nonresidential Alternative Calculation Method Reference Manual For the 2019 Building Energy Efficiency Standards. Available at: https://www.energy.ca.gov/2019publications/CEC-400-2019-006/CEC-400-2019-006-CMF.pdf



2.2 Cost Effectiveness

The Reach Code Team analyzed the cost effectiveness of the packages by applying them to building prototypes (as applicable) using the life cycle cost methodology, which is approved and used by the Energy Commission to establish cost effective building energy standards (Title 24, Part 6).⁵

Per Energy Commission's methodology, the Reach Code Team assessed the incremental costs of the energy efficiency measure packages and compared them to the energy cost savings over the measure life of 15 years. Incremental costs represent the equipment, installation, replacements, and maintenance costs of the proposed measure relative to the 2019 Title 24 Standards minimum requirements. The energy savings benefits are estimated using both TDV of energy and typical utility rates for each building type:

- Time Dependent Valuation: TDV is a normalized monetary format developed and used by the Energy Commission for comparing electricity and natural gas savings, and it considers the cost of electricity and natural gas consumed during different times of the day and year. Simulation outputs are translated to TDV savings benefits using 2019 TDV multipliers and 15-year discounted costs for the nonresidential measure packages.
- Utility bill impacts (On-bill): Utility energy costs are estimated by applying appropriate IOU rates to estimated annual electricity and natural gas consumption. The energy bill savings are calculated as the difference in utility costs between the baseline and proposed package over a 15-year duration accounting for discount rate and energy cost escalation.

In coordination with the IOU rate team, and rate experts at a few electric publicly owned utilities (POUs), the Reach Code Team used the current nonresidential utility rates publicly available at the time of analysis to analyze the cost effectiveness for each proposed package. The utility tariffs, summarized in Figure 3, were determined based on the annual load profile of each prototype, and the most prevalent rate in each territory. For some prototypes there are multiple options for rates because of the varying load profiles of mixed-fuel buildings versus all-electric buildings. Tariffs were integrated in EnergyPro software to be applied to the hourly electricity and gas outputs. The Reach Code Team did not attempt to compare or test a variety of tariffs to determine their impact on cost effectiveness.

The currently available and applicable time-of-use (TOU) nonresidential rates are applied to both the base and proposed cases with PV systems.⁶ Any annual electricity production in excess of annual electricity consumption is credited at the applicable wholesale rate based on the approved NEM tariffs for that utility. For a more detailed breakdown of the rates selected refer to *Appendix 6.4 Utility Rate Schedules*. Note that most utility time-of-use rates will be updated in the near future, which can affect cost effectiveness results. For example, Pacific Gas and Electric Company (PG&E) will introduce new rates for new service connections in late 2019, and existing accounts will be automatically rolled over to new rates in November 2020.

⁶ Under NEM rulings by the CPUC (D-16-01-144, 1/28/16), all new PV customers shall be in an approved TOU rate structure. As of March 2016, all new PG&E net energy metering (NEM) customers are enrolled in a time-of-use rate. (http://www.pge.com/en/myhome/saveenergymoney/plans/tou/index.page?).



⁵ Architectural Energy Corporation (January 2011) Life-Cycle Cost Methodology. California Energy Commission. Available at: http://www.energy.ca.gov/title24/2013standards/prerulemaking/documents/general-cec-documents/2011-01-14-LCC-Methodology-2013.pdf

Figure 3. Utility Tariffs used based on Climate Zone

Climate Zones	Electric / Gas Utility	Electricity (Time-of-use)	Natural Gas
	IOUs		
1-5,11-13,16	PG&E	A-1/A-10	G-NR1
5	PG&E / Southern California Gas Company	A-1/A-10	G-10 (GN 10)
6,8-10,14,15	SCE / Southern California Gas Company	TOU-GS-1/TOU-GS- 2/TOU-GS-3	G-10 (GN- 10)
7,10,14	San Diego Gas and Electric Company (SDG&E)	A-1/A-10	GN-3
	Electric POUs		
4	City of Palo Alto (CPAU)	E-2	∘ n/a
12	Sacramento Municipal Utility District (SMUD)	GS	n/a
6,7,8,16	Los Angeles Department of Water and Power (LADWP)	A-2 (B)	n/a

The Reach Code Team obtained measure costs through interviews with contractors and California distributors and review of online sources, such as Home Depot and RS Means. Taxes and contractor markups were added as appropriate. Maintenance costs were not included because there is no assumed maintenance on the envelope measures. For HVAC and SWH measures the study assumes there are no additional maintenance cost for a more efficient version of the same system type as the baseline. Replacement costs for inverters were included for PV systems, but the useful life all other equipment exceeds the study period.

The Reach Code Team compared the energy benefits with incremental measure cost data to determine cost effectiveness for each measure package. The calculation is performed for a duration of 15 years for all nonresidential prototypes with a 3 percent discount rate and fuel escalation rates based on the most recent General Rate Case filings and historical escalation rates. Cost effectiveness is presented using net present value and benefit-to-cost ratio metrics.

- Net Present Value (NPV): The Reach Code Team uses net savings (NPV benefits minus NPV costs) as the cost effectiveness metric. If the net savings of a measure or package is positive, it is considered cost effective. Negative savings represent net costs. A measure that has negative energy cost benefits (energy cost increase) can still be cost effective if the costs to implement the measure are more negative (i.e., material and maintenance cost savings).
- Benefit-to-Cost Ratio (B/C): Ratio of the present value of all benefits to the present value of all costs over 15 years (NPV benefits divided by NPV costs). The criteria for cost effectiveness is a B/C greater than 1.0. A value of one indicates the savings over the life of the measure are equivalent to the incremental cost of that measure.

⁷ 2019 TDV Methodology Report, California Energy Commission, Docket number: 16-BSTD-06 https://efiling.energy.ca.gov/GetDocument.aspx?tn=216062



2019-07-25

There are several special circumstances to consider when reviewing these results:

- Improving the efficiency of a project often requires an initial incremental investment. However, some packages result in initial construction cost savings (negative incremental cost), and either energy cost savings (positive benefits), or increased energy costs (negative benefits). Typically, utility bill savings are categorized as a 'benefit' while incremental construction costs are treated as 'costs.' In cases where both construction costs are negative and utility bill savings are negative, the construction cost savings are treated as the 'benefit' while the utility bill negative savings are the 'cost.'
- In cases where a measure package is cost effective immediately (i.e., there are upfront cost savings and lifetime energy cost savings), cost effectiveness is represented by ">1".
- The B/C ratios sometimes appear very high even though the cost numbers are not very high (for example, an upfront cost of \$1 but on-bill savings of \$200 over 30 years would equate to a B/C ratio of 200). NPV is also displayed to clarify these potentially confusing conclusions in the example, the NPV would be equal to a modest \$199.

3 Measure Description and Cost

Using the 2019 Title 24 code baseline as the starting point, The Reach Code Team identified potential measure packages to determine the projected energy (therm and kWh) and compliance impacts. The Reach Code Team developed an initial measure list based on experience with designers and contractors along with general knowledge of the relative acceptance and preferences of many measures, as well as their incremental costs.

The measures are categorized into energy efficiency, solar PV and battery, all-electric, and preempted high efficiency measures in subsections below.

3.1 Energy Efficiency Measures

This section describes all the energy efficiency measures considered for this analysis to develop a non-preempted, cost-effective efficiency measure package. The Reach Code Team assessed the cost-effectiveness of measures for all climate zones individually and found that the packages did not need to vary by climate zone, with the exception of a solar heat gain coefficient measure in hotels, as described in more detail below. The measures were developed based on reviews of proposed 2022 Title 24 codes and standards enhancement measures, as well as ASHRAE 90.1 and ASHRAE 189.1 Standards. Please refer to Appendix Section 6.86.7 for a list of efficiency measures that were considered but not implemented.



Figure 4 provides a summary of the cost of each measure and the applicability of each measure to the prototype buildings.

3.1.1 Envelope

- Modify Solar Heat Gain Coefficient (SHGC) fenestration
 - Office and Retail All Climate Zones: reduce window SHGC from the prescriptive value of 0.25 to 0.22
 - ♦ Hotel
 - Climate zones 1, 2, 3, 5, and 16: Increase the SHGC for all nonresidential spaces from the prescriptive value of 0.25 to 0.45 in both common and guest room spaces.
 - Climate zones 4, and 6-15: Reduce window SHGC from the prescriptive value of 0.25 to 0.22; only for common spaces.

In all cases, the fenestration visible transmittance and U-factor remain at prescriptive values.

Fenestration as a function of orientation: Limit the amount of fenestration area as a function of orientation. East-facing and west-facing windows are each limited to one-half of the average amount of north-facing and south-facing windows.

3.1.2 HVAC and SWH

- Drain water heat recovery (DWHR): Add shower drain heat recovery in hotel guest rooms. DWHR captures waste heat from a shower drain line and uses it to preheat hot water. Note that this measure cannot currently be modeled on hotel/motel spaces, and the Reach Code Team integrated estimated savings outside of modeling software based on SWH savings in residential scenarios. Please see Appendix Section 6.3 for details on energy savings analysis.
- VAV box minimum flow: Reduce VAV box minimum airflows from the current T24 prescriptive requirement of 20 percent of maximum (design) airflow to the T24 zone ventilation minimums.
- ★ Economizers on small capacity systems: Require economizers and staged fan control in units with cooling capacity ≥ 33,000 Btu/hr and ≤ 54,000 Btu/hr, which matches the requirement in the 2018 International Green Construction Code and adopts ANSI/ASHRAE/ICC/USGBC/IES Standard 189.1. This measure reduces the T24 prescriptive threshold on air handling units that are required to have economizers, which is > 54,000 Btu/hr.
- Solar thermal hot water: For all-electric hotel only, add solar thermal water heating to supply the following portions of the water heating load, measured in solar savings fraction (SSF):
 - ♦ 20 percent SSF in CZs 2, 3, and 5-9
 - 25 percent in CZ4
 - 35 percent SSF in CZs 1 and 10-16.



3.1.3 Lighting

- Interior lighting reduced lighting power density (LPD): Reduce LPD by 15 percent for Medium Office, 10 percent for Medium Retail and by 10 percent for the nonresidential areas of the Small Hotel.
- Institutional tuning: Limit the maximum output or maximum power draw of lighting to 85 percent of full light output or full power draw.
- Daylight dimming plus off: Turn daylight-controlled lights completely off when the daylight available in the daylit zone is greater than 150 percent of the Illuminance received from the general lighting system at full power. There is no associated cost with this measure, as the 2019 T24 Standards already require multilevel lighting and daylight sensors in primary and secondary daylit spaces. This measure is simply a revised control strategy and does not increase the number of sensors required or labor to install and program a sensor.
- Occupant sensing in open plan offices: In an open plan office area greater than 250 ft², control lighting based on occupant sensing controls. Two workstations per occupancy sensor.

Details on the applicability and impact of each measure by building type and by space function can be found in *Appendices 6.2*. The appendix also includes the resulting LPD that is modeled as the proposed by building type and by space function.



Figure 4. Energy Efficiency Measures - Specification and Cost

	Figure 4. Energy	Efficien				n and Lost	47
		• Included in	n Packages 1A	Applicabilit , 18, 3A, 3C	ty.	Incremental Cost	Sources & Notes
Measure	Baseline T24 Requirement			Sma	ll Hotel		
Measure		Med Office	Med Retail	Guest rooms	Comm Spaces		
Envelope							
Modify SHGC Fenestration	SHGC of 0.25	•	•	•	•	\$1.60 /ft² window for \$HGC decreases, \$0/ft² for \$HGC increases	Costs from one manufacturer.
Fenestration as a Function of Orientation	Limit on total Window area and west-facing window area as a function of wall area.		Year		-	\$0	No additional cost associated with the measure which is a design consideration not an equipment cost.
HVAC and SHW			2.00		on the Wall Control of Majoria and The State of Control of Majoria and The State of Control of Cont		
Drain Water Heat Recovery	No heat recovery required		-			\$841 /unit	Assume 1 heat recovery unit- for every 3 guestrooms. Costs from three manufacturers.
VAV Box Minimum Flow	20 percent of maximum (design) airflow		-	-	10	\$0	No additional cost associated with the measure which is a design consideration not an equipment cost.
Economizers on Small Capacity Systems	Economizers required for units > 54,000 Btu/hr	<u></u>		,	· · · · · · · · · · · · · · · · · · ·	\$2,857 /unit	Costs from one manufacturer's representative and one mechanical contractor.

		• Included ii — Not applic	n Packages 1A	Qr. Macral, Styl		Incremental Cost	Sources & Notes
Measure	Baseline T24 Requirement			Smal	l Hotel		1
	Med Office	Med Retail	Guest rooms	Comm Spaces			
Solar Thermal Hot Water	For central heat pump water heaters, there is no prescriptive baseline requirement.		-	e (electric only)		\$33/therm-yr	Installed costs reported in the California Solar Initiative Thermal Program Database, 2015-present. Costs include tank and were only available for gas backup systems. Costs are reduced by 19 percent per federal income tax credit average through 2022.
Lighting							
Interior Lighting Reduced	Per Area Category Method, varies by Primary Function Area. Office area 0.60 – 0.70 W/ft² depending on area of space. Hotel function area 0.85 W/ft² Retail Merchandise Sales 1.00 W/ft²		:•	-		\$0	Industry report on LED pricing analysis shows that costs are not correlated with efficacy. 9



⁸ http://www.csithermalstats.org/download.html

⁹ http://calmac.org/publications/LED Pricing Analysis Report - Revised 1.19.2018 Final.pdf

			Measure A Packages 1A, able	Applicabilit 18,3A,3C	У	Incremental Cost	Sources & Notes
Measure	Baseline T24 Requirement			Smal	l Hotel	,	
		Med Office	Med Retail	Guest rooms	Comm Spaces		
Institutional Tuning	No requirement, but Power Adjustment Factor (PAF) credit of 0.10 available for luminaires in non-daylit areas and 0.05 for luminaires in daylit areas 10		•	/	÷ • • • • • • • • • • • • • • • • • • •	\$0.06/ft²	Industry report on institutional tuning ¹¹
Daylight Dimming Plus Off	No requirement, but PAF credit of 0.10 available.			<u>.</u>	-	\$0	Given the amount of lighting controls already required, this measure is no additional cost.
Occupant Sensing in Open Plan Offices	No requirement, but PAF credit of 0.30 available.	•				\$189 /sensor; \$74 /powered relay; \$108 /secondary relay	2 workstations per sensor; 1 fixture per workstation; 4 workstations per master relay; 120 ft²/workstation in open office area; which is 53% of total floor area of the medium office

¹¹ https://slipstreaminc.org/sites/default/files/2018-12/task-tuning-report-mndoc-2015.pdf



¹⁰ Power Adjustment Factors allow designers to tradeoff increased lighting power densities for more efficient designs. In this study, PAF-related measures assume that the more efficient design is incorporated without a tradeoff for increased lighting power density.

Solar Photovoltaics and Battery Measures

This section describes the PV and battery measures considered for this analysis. The Reach Code Team estimated the required PV sizes for each building prototype for the efficiency measure packages and the stand alone PV and battery options.

3.2.1 Solar Photovoltaics

2019 Title 24 requires nonresidential buildings to reserve at least 15 percent of the roof area as a "solar zone," but does not include any requirements or compliance credits for the installation of photovoltaic systems. The Reach Code Team analyzed a range of PV system sizes to determine cost effectiveness. To determine upper end of potential PV system size, the Reach Code Team assumed a PV generation capacity of either

- ♦ 15 W/ft² covering 50 percent of the roof area, or
- Enough to nearly offset the annual energy consumption.

The medium office and small hotel prototypes had small roof areas compared to their annual electricity demand, thus the PV system capacity at 50 percent of the roof area was less than the estimated annual usage. The medium office and small hotel had a 135 kW and 80 kW array, respectively. The medium retail building has a substantially large roof area that would accommodate a PV array that generates more than the annual electricity load of the building. The PV array for the medium retail building was sized at 110 kW to not exceed the annual electricity consumption of the building when accounting for the minimum annual energy demand across climate zones with efficiency packages.

The modeling software for nonresidential buildings does not allow auto-sizing of PV based on a desired percent offset of electricity use. Moreover, the PV size is also constrained by the availability of roof area. Hence, a common size of PV is modeled for all the packages including all electric design. Figure 5 through Figure 7 below demonstrate the percent of electricity offset by PV for both mixed fuel and all electric buildings over their respective federal minimum design package.

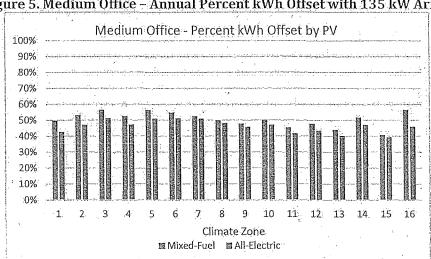


Figure 5. Medium Office - Annual Percent kWh Offset with 135 kW Array


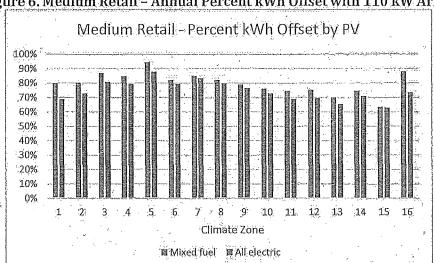


Figure 6. Medium Retail - Annual Percent kWh Offset with 110 kW Array

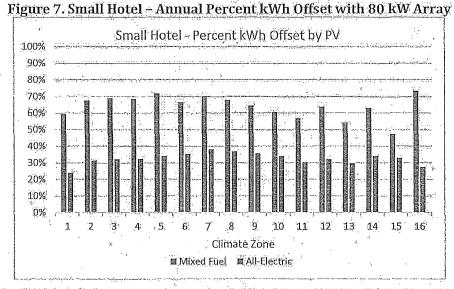

The costs for PV include first cost to purchase and install the system, inverter replacement costs, and annual maintenance costs. A summary of the medium office costs and sources is given in Figure 8. Upfront solar PV system costs are reduced by the federal income tax credit (ITC), approximately 19 percent due to a phased reduction in the credit through the year 2022. 12

¹² The federal credit drops to 26% in 2020, and 22% in 2021 before dropping permanently to 10% for commercial projects and 0% for residential projects in 2022. More information on federal Investment Tax Credits available at: https://www.seia.org/initiatives/solar-investment-tax-credit-itc



Figure 8. Medium Office Upfront PV Costs

	Unit Cost	Cost	Useful Life (yrs.)	Source	
Solar PV System	\$2.30 / Wdc	\$310,500	30	National Renewable Energy Laboratory (NREL) Q1 2016 ¹³	
Inverter Replacement	\$0.15 / Wdc	\$20,250	10	ra n = f = c - 1 = n / c - 1 = 14	
Maintenance Costs	\$0.02 / Wdc	\$2,700	. 1	E3 Rooftop Solar PV System Report ¹⁴	

PV energy output is built into CBECC-Com and is based on NREL's PyWatts calculator, which includes long term performance degradation estimates. 15

3.2.2 Battery Storage

This measure includes installation of batteries to allow energy generated through PV to be stored and used later, providing additional energy cost benefits. This report does not focus on optimizing battery sizes or controls for each prototype and climate zone, though the Reach Code Team ran test simulations to assess the impact of battery sizes on TDV savings and found diminishing returns as the battery size increased.

The team set battery control to the Time of Use Control (TOU) method, which assumes batteries are charged anytime PV generation is greater than the building load but discharges to the electric grid beginning during the highest priced hours of the day (the "First Hour of the Summer Peak"). Because there is no default hour available in CBECC-Com, the team applied the default hour available in CBECC-Res to start discharging (hour 19 in CZs 2, 4, and 8-15, and hour 20 in other CZs). This control option is most reflective of the current products on the market. While this control strategy is being used in the analysis, there would be no mandate on the control strategy used in practice.

The current simulation software has approximations of how performance characteristics change with environmental conditions, charge/discharge rates, and degradation with age and use. More information is on the software battery control capabilities and associated qualification requirements are available in the Residential Alternative Calculation Method Reference Manual and the 2019 Reference Appendices for the 2019 Title 24 Standards. 15,17

The Reach Code Team used costs of \$558 kWh based on a 2018 IOU Codes and Standards Program report, assuming a replacement is necessary in year 15.18 Batteries are also eligible for the ITC if they are installed at the same time as the renewable generation source and at least 75 percent of the energy used to charge

¹⁸ Available at: http://localenergycodes.com/download/430/file_path/fieldList/PV%20Plus%20Battery%20Storage%20Report



¹³ Available at: https://www.nrel.gov/docs/fy16osti/66532.pdf

¹⁴ Available at: https://efiling.energy.ca.gov/getdocument.aspx?tn=221366

¹⁵ More information available at: https://pvwatts.nrel.gov/downloads/pvwattsv5.pdf

¹⁶ Battery controls are discussed in Sections 2.1.5.4 and Appendix D of the Residential Alternative Calculation Method Reference Manual, available here: https://www.energy.ca.gov/2019publications/CEC-400-2019-005/CEC-400-2019-005-CMF.pdf

Oualification Requirements for Battery Storage Systems are available in JA12 of the 2019 Reference Appendices: https://www.energy.ca.gov/2018publications/CEC-400-2018-021/CEC-400-2018-021-CMF.pdf

the battery comes from a renewable source. Thus, the Reach Code Team also applied a 19 percent cost reduction to battery costs.

3.2.3 PV-only and PV+Battery Packages

The Reach Code Team analyzed solar PV and battery storage only, without other efficiency measures in both mixed-fuel and all-electric building designs. Two different sizes of solar PV and battery storage were analyzed.

- * Small PV Size: 3 kW, assumed to be the minimal PV system considered for installation in a nonresidential building.
- Large PV Size: PV capacity equal to 15 W/ft² over 50 percent of the roof area, or sized to nearly offset annual electricity consumption, as described in Section 3.2.1.
- Small Battery Size: 5 kWh, assumed to be the minimal battery system considered for installation in a nonresidential building, and representative of smaller products currently available on the market.
- Large Battery Size: 50 kWh, assumed to be a substantially large size for a nonresidential setting. Generally, the reach code team found diminishing on-bill and TDV benefits as the battery size increased.

As described in Section 1 and Section 4.4, each PV size was run as a standalone measure. When packaged with a battery measure, the small PV size was paired with the small battery size, and the large PV size was paired with the large battery size.

3.3 All Electric Measures

The Reach Code Team Investigated the cost and performance impacts and associated infrastructure costs associated with changing the baseline HVAC and water heating systems to all-electric equipment. This includes heat pump space heating, electric resistance reheat coils, electric water heater with storage tank, heat pump water heating, increasing electrical capacity, and eliminating natural gas connections that would have been present in mixed-fuel new construction. The Reach Code Team selected electric systems that would be installed instead of gas-fueled systems in each prototype.

3.3.1 HVAC and Water Heating

The nonresidential standards use a mixed-fuel baseline for the Standard Design systems. In most nonresidential occupancies, the baseline is natural gas space heating. Hotel/motels and high-rise residential occupancies also assume natural gas baseline water heating systems for the guest rooms and dwelling units. In the all-electric scenario, gas equipment serving these end-uses is replaced with electric equipment, as described in Figure 9.



2019-07-25

Figure 9. All-Electric HVAC and Water Heating Characteristics Summary.

	·:	Medium Office	Medium Retail	Small Hotel		
HVAC System	Baseline	Packaged DX + VAV with HW reheat. Central gas boilers.	Single zone packaged DX with gas furnaces	NonRes: Packaged DX + VAV with HW reheat. Central gas boilers. Res: Single zone DX AC unit with gas furnaces		
	Proposed All- Electric	Packaged DX + VAV with electric resistance reheat.	Single zone packaged heat pumps	NonRes: Packaged DX + VAV with electric resistance reheat Res: Single zone heat pumps		
Water Heating System	Baseline	Electric resistance with storage	Electric resistance with storage	NonRes: Electric resistance storage Res: Central gas storage with recirculation		
	Proposed All- Electric resistance Electric with storage		Electric resistance with storage	NonRes: Electric resistance storage Res: Individual heat pumps		

The Reach Code Team received cost data for baseline mixed-fuel equipment as well as electric equipment from an experienced mechanical contractor in the San Francisco Bay Area. The total construction cost includes equipment and material, labor, subcontractors (for example, HVAC and SHW control systems), and contractor overhead.

3.3.1.1 Medium Office

The baseline HVAC system includes two gas hot water boilers, three packaged rooftop units, and VAV hot water reheat boxes. The SHW design includes one 8.75 kW electric resistance hot water heater with a 30-gallon storage tank.

For the medium office all-electric HVAC design, the Reach Code Team investigated several potential all-electric design options, including variable refrigerant flow, packaged heat pumps, and variable volume and temperature systems. After seeking feedback from the design community, the Reach Code Team determined that the most feasible all-electric HVAC system, given the software modeling constraints is a VAV system with an electric resistance reheat instead of hot water reheat coil. A parallel fan-powered box (PFPB) implementation of electric resistance reheat would further improve efficiency due to reducing ventilation requirements, but an accurate implementation of PFPBs is not currently available in compliance software.

Note that the actual natural gas consumption for the VAV hot water reheat baseline may be higher than the current simulation results due to a combination of boiler and hot water distribution losses. A recent research study shows that the total losses can account for as high as 80 percent of the boiler energy use. 19

¹⁹ Raftery, P., A. Geronazzo, H. Cheng, and G. Paliaga. 2018. Quantifying energy losses in hot water reheat systems. Energy and Buildings, 179: 183-199. November. https://escholarship.org/uc/item/3qs8f8qx.



If these losses are considered savings for the electric resistance reheat (which has zero associated distribution loss) may be higher.

The all-electric SHW system remains the same electric resistance water heater as the baseline and has no associated incremental costs.

Cost data for medium office designs are presented in Figure 10. The all-electric HVAC system presents cost savings compared to the hot water reheat system from elimination of the hot water boiler and associated hot water piping distribution. CZ10 and CZ15 all-electric design costs are slightly higher because they require larger size rooftop heat pumps than the other climate zones.

Figure 10. Medium Office HVAC System Costs

Climate Zone	Mixed Fuel Baseline	All Electric System	Incremental cost for All-Electric
CZ01	\$1,202,538	\$1,106,432	\$(96,106)
CZ02	\$1,261,531	\$1,178,983	\$(82,548)
CZ03	\$1,205,172	\$1,113,989	\$(91,183)
CZ04	\$1,283,300	\$1,205,434	\$(77,865)
CZ05	\$1,207,345	\$1,113,989	\$(93,356)
CZ06	\$1,216,377	\$1,131,371	\$(85,006)
CZ07	\$1,227,932	\$1,148,754	\$(79,178)
CZ08	\$1,250,564	\$1,172,937	\$(77,626)
CZ09	\$1,268,320	\$1,196,365	\$(71,955)
CZ10	\$1,313,580	\$1,256,825	\$(56,755)
CZ11	\$1,294,145	\$1,221,305	\$(72,840)
CZ12	\$1,274,317	\$1,197,121	\$(77,196)
CZ13	\$1,292,884	\$1,221,305	\$(71,579)
CZ14	\$1,286,245	\$1,212,236	\$(74,009)
CZ15	\$1,357,023	\$1,311,994	\$(45,029)
CZ16	\$1,295,766	\$1,222,817	\$(72,949)

3.3.1.2 Medium Retail

The baseline HVAC system includes five packaged single zone rooftop ACs with gas furnaces. Based on fan control requirements in section 140.4(m), units with cooling capacity ≥ 65,000 Btu/h have variable air volume fans, while smaller units have constant volume fans. The SHW design includes one 8.75 kW electric resistance hot water heater with a 30-gallon storage tank.

For the medium retail all-electric HVAC design, the Reach Code Team assumed packaged heat pumps instead of the packaged ACs. The all-electric SHW system remains the same electric resistance water heater as the baseline and has no associated incremental costs.

Cost data for medium retail designs are presented in Figure 11. Costs for rooftop air-conditioning systems are very similar to rooftop heat pump systems.



Figure 11. Medium Retail HVAC System Costs

Climate Zone	Mixed Fuel Baseline	All Electric System	Incremental cost for All-Electric
CZ01	\$328,312	\$333,291	\$4,978
CZ02	\$373,139	\$373,702	\$563
CZ03	\$322,849	\$326,764	\$3,915
CZ04	\$329,900	\$335,031.	\$5,131
CZ05	\$359,888	\$362,408	\$2,520
CZ06	\$335,728	\$341,992	\$6,265
CZ07	\$345,544	\$349,808	\$4,265
CZ08	\$368,687	\$369,792	\$1,104
CZ09	\$415,155	\$411,069	\$(4,087)
CZ10	\$345,993	\$346,748	\$755
CZ11	\$418,721	\$414,546	\$(4,175)
CZ12	\$405,110	\$400,632	\$(4,477)
CZ13	\$376,003	\$375,872	\$(131)
CZ14	\$405,381	\$406,752	\$1,371
CZ15	\$429,123	\$427,606	\$(1,517)
CZ16	\$401,892	\$404,147	\$2,256

3.3.1.3 Small Hotel

The small hotel has two different baseline equipment systems, one for the nonresidential spaces and one for the guest rooms. The nonresidential HVAC system includes two gas hot water boilers, four packaged rooftop units and twelve VAV terminal boxes with hot water reheat coil. The SHW design includes a small electric water heater with storage tank. The residential HVAC design includes one single zone AC unit with gas furnace for each guest room and the water heating design includes one central gas storage water heater with a recirculation pump for all guest rooms.

For the small hotel all-electric design, the Reach Code Team assumed the nonresidential HVAC system to be packaged heat pumps with electric resistance VAV terminal units, and the SHW system to remain a small electric resistance water heater.

For the guest room all-electric HVAC system, the analysis used a single zone (packaged terminal) heat pump and a central heat pump water heater serving all guest rooms. Central heat pump water heating with recirculation serving guest rooms cannot yet be modeled in CBECC-Com, and energy impacts were modeled by simulating individual heat pump water heaters in each guest room. The reach code team believes this is a conservative assumption, since individual heat pump water heaters will have much higher tank standby losses. The Reach Code Team attained costs for central heat pump water heating installation including storage tanks and controls and used these costs in the study.

Cost data for small hotel designs are presented in Figure 12. The all-electric design presents substantial cost savings because there is no hot water plant or piping distribution system serving the nonresidential spaces, as well as the lower cost of packaged terminal heat pumps serving the residential spaces compared to split DX/furnace systems with individual flues.



Figure 12. Small Hotel HVAC and Water Heating System Costs

Climate Zone	Mixed Fuel Baseline	All Electric System	Incremental cost for All-Electric
CZ01	\$2,337,531	\$1,057,178	\$(1,280,353)
CZ02	\$2,328,121	\$1,046,795	\$(1,281,326)
CZ03	\$2,294,053	\$1,010,455	\$(1,283,598)
CZ04	\$2,302,108	\$1,018,675	\$(1,283,433)
CZ05	\$2,298,700	\$1,015,214	\$(1,283,486)
CZ06	\$2,295,380	\$1,011,753	\$(1,283,627)
CZ07	\$2,308,004	\$1,026,029	\$(1,281,975)
CZ08	\$2,333,662	\$1,053,717	\$(1,279,946)
CZ09	\$2,312,099	\$1,030,355	\$(1,281,744)
CZ10	\$2,354,093	\$1,075,348	\$(1,278,745)
CZ11	\$2,347,980	\$1,068,426	\$(1,279,554)
- CZ12	\$2,328,654	\$1,047,660	\$(1,280,994)
CZ13	\$2,348,225	\$1,068,858	\$(1,279,367)
CZ14	\$2,345,988	\$1,066,263	\$(1,279,725)
CZ15	\$2,357,086	\$1,079,241	\$(1,277,845)
CZ16	\$2,304,094	\$1,019,973	\$(1,284,121)

3.3.2 Infrastructure Impacts

Electric heating appliances and equipment often require a larger electrical connection than an equivalent natural gas appliance because of the higher voltage and amperage necessary to electrically generate heat. Thus, many buildings may require larger electrical capacity than a comparable building with natural gas appliances. This includes:

- Electric resistance VAV space heating in the medium office and common area spaces of the small hotel.
- Heat pump water heating for the guest room spaces of the small hotel.

3.3.2.1 Electrical Panel Sizing and Wiring

This section details the additional electrical panel sizing and wiring required for all-electric measures. In an all-electric new construction scenario, heat pumps replace packaged DX units which are paired with either a gas furnace or a hot water coil (supplied by a gas boiler). The electrical requirements of the replacement heat pump would be the same as the packaged DX unit it replaces, as the electrical requirements would be driven by the cooling capacity, which would remain the same between the two units.

VAV terminal units with hot water reheat coils that are replaced with electric resistance reheat coils require additional electrical infrastructure. In the case of electric resistance coils, the Reach Code Team assumed that on average, a VAV terminal unit serves around 900 ft² of conditioned space and has a heating capacity of 5 kW (15 kBtu/hr/ft²). The incremental electrical infrastructure costs were determined based on RS Means. Calculations for the medium office shown in Figure 13 include the cost to add electrical panels as well as the cost to add electrical lines to each VAV terminal unit electric resistance coil in the medium office prototype. Additionally, the Reach Code Team subtracted the electrical infrastructure costs associated with hot water pumps required in the mixed fuel baseline, which are not required in the all-electric measures.



20

The Reach Code Team calculated costs to increase electrical capacity for heat pump water heaters in the small hotel similarly.

Figure 13. Medium Office Electrical Infrastructure Costs for All-Electric Design

C LOS MACCALLIA	Office meetited thirds detaile doses for the	i meetite besign
	No. VAV Boxes	60
-	VAV box heating capacity (watts)	4,748
. e .	No. hot water pumps	2
	Hot water pump power (watts)	398
	Voltage	208
(AxB - CxD)/E	Panel ampacity required	1,366
F/400	Number of 400-amp panels required	4
-	Cost per 400-amp panel	\$3,100
GxH	Total panel cost	\$12,400
	Total electrical line length required (ft)	4,320
<u> </u>	Cost per linear foot of electrical line	\$3,62
JxK .	Total electrical line cost	\$15,402
1+L	Total electrical infrastructure incremental cost	\$27,802
	(AxB - CxD)/E F/400 GxH	- VAV box heating capacity (watts) - No, hot water pumps - Hot water pump power (watts) - Voltage (AxB - CxD)/E Panel ampacity required F/400 Number of 400-amp panels required - Cost per 400-amp panel GxH Total panel cost - Total electrical line length required (ft) - Cost per linear foot of electrical line JxK Total electrical line cost

3.3.2.2 Natural Gas

This analysis assumes that in an all-electric new construction scenario natural gas would not be supplied to the site. Eliminating natural gas in new construction would save costs associated with connecting a service line from the street main to the building, piping distribution within the building, and monthly connection charges by the utility.

The Reach Code Team determined that for a new construction building with natural gas piping, there is a service line (branch connection) from the natural gas main to the building meter. In the medium office prototype, natural gas piping is routed to the boiler. The Reach Code Team assumed that the boiler is on the first floor, and that 30 feet of piping is required from the connection to the main to the boiler. The Reach Code Team assumed 1" corrugated stainless steel tubing (CSST) material is used for the plumbing distribution. The Reach Code Team included costs for a natural gas plan review, service extension, and a gas meter, as shown in Figure 14 below. The natural gas plan review cost is based on information received from the City of Palo Alto Utilities. The meter costs are from PG&E and include both material and labor. The service extension costs are based on guidance from PG&E, who noted that the cost range is highly varied and that there is no "typical" cost, with costs being highly dependent on length of extension, terrain, whether the building is in a developed or undeveloped area, and number of buildings to be served. While an actual service extension cost is highly uncertain, the team believes the costs assumed in this analysis are within a reasonable range based on a sample range of costs provided by PG&E. These costs assume development in a previously developed area.



Figure 14. Natural Gas Infrastructure Cost Savings for All-Electric Prototypes

Cost Type	Medium Office	Medium Retail	Small Hotel
Natural Gas Plan Review	\$2,316	\$2,316	\$2,316
Service Extension	\$13,000	\$13,000	\$13,000
Meter	\$3,000	\$3,000	\$3,000
Plumbing Distribution	\$633	\$9,711	\$37,704
Total Cost	\$18,949	\$28,027	\$56,020

3.4 Preempted High Efficiency Appliances

The Reach Code Team developed a package of high efficiency (HE) space and water heating appliances based on commonly available products for both the mixed-fuel and all-electric scenarios. This package assesses the standalone contribution that high efficiency measures would make toward achieving high performance thresholds. The Reach Code Team reviewed the Air Conditioning, Heating, and Refrigeration Institute (AHRI) certified product database to estimate appropriate efficiencies.²⁰

The Reach Code Team determined the efficiency increases to be appropriate based on equipment type, summarized in Figure 15, with cost premiums attained from a Bay Area mechanical contractor. The ranges in efficiency are indicative of varying federal standard requirements based on equipment size.

Figure 15. High Efficiency Appliance Assumptions

	Federal Minimum Efficiency	Preempted Efficiency	Cost Premium for HE Appliance	
Gas space heating and water heating	80-82%	90-95%	10-15%	
Large packaged rooftop cooling	9.8-12 EER 11.4-12.9 IEER	10,5-13 FER 15-15,5 IEER	10-15%	
Single zone heat pump space heating	7.7 HSPF 3.2 COP	10 HSPF 3.5 COP	6-15%	
Heat pump water heating	2.0 UEF	3.3 UEF	None (market does not carry 2.0 UEF)	

3.5 Greenhouse Gas Emissions

The analysis uses the greenhouse gas (GHG) emissions estimates from Zero Code reports available in CBECC-Com.²¹ Zero Code uses 8760 hourly multipliers accounting for time dependent energy use and carbon emissions based on source emissions; including renewable portfolio standard projections. Fugitive

²¹ More information available at: https://zero-code.org/wp-content/uploads/2018/11/ZERO-Code-TSD-California.pdf



22

Available at: https://www.ahridirectory.org/Search/SearchHome?ReturnUrl=%2f

emissions are not included. There are two strings of multipliers – one for Northern California climate zones, and another for Southern California climate zones.²²

4 Results

The Reach Code Team evaluated cost effectiveness of the following measure packages over a 2019 mixed-fuel code compliant baseline for all climate zones, as detailed in Sections 4.1 – 4.3 and reiterated in Figure 16:

- Package 1A Mixed-Fuel + EE: Mixed-fuel design with energy efficiency measures and federal minimum appliance efficiencies.
- Package 1B Mixed-Fuel + EE + PV + B: Same as Package 1A, plus solar PV and batteries.
- Package 1C Mixed-fuel + HE: Alternative design with high efficiency appliances, triggering federal preemption.
- Package 2 All-Electric Federal Code-Minimum Reference: All-electric design with federal code minimum appliance efficiency. No solar PV or battery.
- Package 3A All-Electric + EE: All-electric design with energy efficiency measures and federal minimum appliance efficiencies.
- * Package 3B All-Electric + EE + PV + B: Same as Package 3A, plus solar PV and batteries.
- Package 3C All-Electric + HE: All-electric design with high efficiency appliances, triggering federal preemption.

Figure 16. Package Summary

Package	Fuel	Туре	Energy Efficiency	PV & Battery	High Efficiency Appliances
rackage	Mixed Fuel	All-Electric	Measures	(PV + B)	(HE)
Mixed-Fuel Code Minimum Baseline	X				
1A – Mixed-Fuel + EE	Х	2	X		
1B - Mixed-Fuel + EE + PV + B	Χ		X	X	
1C - Mixed-fuel + HE	X				'Χ'.
2 – All-Electric Federal Code- Minimum Reference		X			
3A - All-Electric + EE		Х	X.		
3B – All-Electric + EE + PV + B		X	X	X	
3C – All-Electric + HE		X			X

²² CBECC-Com documentation does not state which climate zones fall under which region. CBECC-Res multipliers are the same for CZs 1-5 and 11-13 (presumed to be Northern California), while there is another set of multipliers for CZs 6-10 and 14-16 (assumed to be Southern California).



Section 4.4 presents the results of the PV-only and PV+Battery analysis.

The TDV and on-bill based cost effectiveness results are presented in terms of B/C ratio and NPV in this section. What constitutes a 'benefit' or a 'cost' varies with the scenarios because both energy sayings and incremental construction costs may be negative depending on the package. Typically, utility bill savings are categorized as a 'benefit' while incremental construction costs are treated as 'costs.' In cases where both construction costs are negative and utility bill savings are negative, the construction cost savings are treated as the 'benefit' while the utility bill negative savings are as the 'cost.'

Overarching factors to keep in mind when reviewing the results include:

- To pass the Energy Commission's application process, local reach codes must both be cost effective and exceed the energy performance budget using TDV (i.e., have a positive compliance margin). To emphasize these two important factors, the figures in this Section highlight in green the modeling results that have either a positive compliance margin or are cost effective. This will allow readers to identify whether a scenario is fully or partially supportive of a reach code, and the opportunities/challenges that the scenario presents. Conversely, Section 4.4 only highlights results that both have a positive compliance margin and are cost effective, to allow readers to identify reach code-ready scenarios.
 - Note: Compliance margin represents the proportion of energy usage that is saved compared to the baseline, measured on a TDV basis.
- The Energy Commission does not currently allow compliance credit for either solar PV or battery storage. Thus, the compliance margins in Packages 1A are the same as 1B, and Package 3A is the same as 3B. However, The Reach Code Team did include the impact of solar PV and battery when calculating TDV cost-effectiveness.
- When performance modeling residential buildings, the Energy Commission allows the Standard Design to be electric if the Proposed Design is electric, which removes TDV-related penalties and associated negative compliance margins. This essentially allows for a compliance pathway for all-electric residential buildings. Nonresidential buildings are not treated in the same way and are compared to a mixed-fuel standard design.
- Results do not include an analysis and comparison of utility rates. As mentioned in Section 2.2, The Reach Code Team coordinated with utilities to select tariffs for each prototype given the annual energy demand profile and the most prevalent rates in each utility territory. The Reach Code Team did not compare a variety of tariffs to determine their impact on cost effectiveness. Note that most utility time-of-use rates are continuously updated, which can affect cost effectiveness results.
- As a point of comparison, mixed-fuel baseline energy figures are provided in Appendix 6.5.

4.1 Cost Effectiveness Results – Medium Office

Figure 17 through Figure 23 contain the cost-effectiveness findings for the Medium Office packages. Notable findings for each package include:

★ 1A - Mixed-Fuel + EE: Packages achieve +12 to +20 percent compliance margins depending on climate zone. All packages are cost effective in all climate zones using the TDV approach. All packages are cost effective using the On-Bill approach except for LADWP territory.



- IB Mixed-Fuel + EE + PV + B: All packages are cost effective using the On-Bill and TDV approaches, except On-Bill in LADWP territory. When compared to 1A, the B/C ratio changes depending on the utility and climate zone (some increase while others decrease). However, NPV savings are increased across the board, suggesting that larger investments yield larger returns.
- 1C Mixed-Fuel + HE: Packages achieve +3 to +5 percent compliance margins depending on climate zone, but no packages were cost effective. The incremental costs of a high efficiency condensing boiler compared to a non-condensing boiler contributes to 26-47% of total incremental cost depending on boiler size. Benefits of condensing boiler efficiency come from resetting hot water return temperature as boiler efficiency increases at lower hot water temperature. However, hot water temperature reset control cannot currently be implemented in the software. In addition, the natural gas energy cost constitutes no more than 5% of total cost for 15 climate zones, so improving boiler efficiency has limited contribution to reduction of total energy cost.

♦ 2 - All-Electric Federal Code-Minimum Reference:

- Packages achieve between -27 percent and +1 percent compliance margins depending on climate zone. This is likely because the modeled system is electric resistance, and TDV values electricity consumption more heavily than natural gas. This all-electric design without other efficiency measures does not comply with the Energy Commission's TDV performance budget.
- All incremental costs are negative due to the elimination of natural gas infrastructure.
- Packages achieve utility cost savings and are cost effective using the On-Bill approach in CZs 6-10 and 14-15. Packages do not achieve savings and are not cost effective using the On-Bill approach in most of PG&E territory (CZs 1,2,4, 11-13, and 16). Packages achieve savings and are cost effective using TDV in all climate zones except CZ16.
- 3A All-Electric + EE: Packages achieve positive compliance margins except -15 percent in CZ16, which has a higher space heating load than other climate zones. All packages are cost effective in all climate zones except CZ16.
- \$\int 3B All-Electric + EE + PV + B: Packages achieve positive compliance margins except -15 percent
 in CZ16. All packages are cost-effective from a TDV perspective in all climate zones. All packages
 are cost effective from an On-Bill perspective in all climate zones except in CZ 2 and CZ 16 in
 LADWP territory.
- 3C All-Electric + HE: Packages achieve between -26 percent and +2 percent compliance margins depending on climate zone. The only packages that are cost effective and with a positive compliance margin are in CZs 7-9 and 15. As described in Package 1C results, space heating is a relatively low proportion of energy costs in most climate zones, limiting the costs gains for higher efficiency equipment.



25

Figure 17, Cost Effectiveness for Medium Office Package 1A - Mixed-Fuel + EE

	T		guitin			Medium Om		CIT THINE		⊩B/C		1
		Elec	G 6	GHG Reduc-	Comp-		Lifecycle	STDV	B/C	l : **	NDV'	ioni.
67	1141114	Savings	Gas Savings	tions	liance	Incremental	Utility Cost	1 2 T	Ratio	Ratio (TDV)	NPV	NPV
CZ	Utility	(kWh)	(therms)	(mtons)	Margin	Package Cost	Savings	Savings	(On-bill)	(LDV)	(On-bill)	(TDV)
Package		! Fuel + EE								entina produce de la companya de la La companya de la co	radioritalne i steep e voos et one-	andrille andrille Tenan
CZ01	PG&E	34,421	-808	4.5	18%	\$66,649	\$125,902	\$71,307	1.9	1.1	\$59,253	\$4,658
CZ02	PG&E	40,985	÷505	8.1	17% -	\$66,649	\$163,655	\$99,181	2.5	1.5	\$97,005	\$32,532
CZ03	PG&E	36,266	-463	7.0	20%	\$66,649	\$141,897	\$84,051	2.1	1.3	\$75,248	\$17,401
CZ04	PG&E	40,590	-547	7.7	14%	\$66,649	\$162,139	\$95,410	2.4	1.4	\$95,489	\$28,761
CZ04-2	CPAU	40,590	-547	7.7	14%	\$66,649	\$85,537	\$95,410	1.3	1.4	\$18,887	\$28,761
CZ05	PG&E	38,888	-499	7.4	18%	\$66,649	\$154,044	\$91,115	2.3	1.4	\$87,395	\$24,465
CZ05-2	SCG	38,888	-499	7.4	18%	\$66,649	\$156,315	\$91,115	72.3	1.4	\$89,665	\$24,465
CZ06	SCE	39,579	-305	8.7	-20%	\$66,649	\$86,390	\$100,469	1.3	1.5	*\$19,741	\$33,820
CZ06-2	LADWP	39,579	-305	8.7	20%-	\$66,649	\$51,828	\$100,469	0.8	1.5	(\$14,821)	\$33,820
CZ07	SDG&E	41,817	-6	11.3	20%	\$66,649	\$204,394	\$112,497	3.1	90001.7/	\$137,745	\$45,848
CZ08:	SCE ⁻	41,637	-60	10.8	18%	\$66,649	\$89,783	\$113,786	1.3	1.7°	\$23,134	\$47,137
CZ08-2	LADWP	41,637	-60	10.8	18%	\$66,649	\$54,876	\$113,786	0.8	1.7	(\$11,773)	\$47,137
CZ09	SCE	42,539	-210	10.1	16%	\$66,649	\$95,636	\$115,647	1.4	N 1.7	\$28,987	\$48,998
CZ09-2	LADWP	42,539	-210	10.1	16%	\$66,649	\$58,168	\$115,647	0.9	1.7	(\$8,481)	\$48,998
CZ10	SDG&E	41,857	-216	9.8	17%	\$66,649	\$210,303	\$108,726	3.2	1.6	\$143,654	\$42,077
CZ10-2	SCE	41,857	-216	9.8	17%	\$66,649	\$92,736	\$108,726	1.4	1.6-	\$26,087	\$42,077
CZ11	PG&E	42,523	-390	9.1	13%	\$66,649	\$166,951	\$104,001	2.5	1.6	\$100,301	\$37,352
CZ12	PG&E	41,521	-466	8:4	14%	\$66,649	\$161,594	\$100,135	2.4	7/42 17:5	\$94,945	\$33,486
CZ12-2	SMUD	41,521	-466	8.4	14%	\$66,649	\$71,734	\$100,135	1.1	1.5	\$5,085	\$33,486
CZ13	PG&E	42,898	-434	9.0	13%	\$66,649	\$169,107	\$99,992	2.5	1.5	\$102,457	\$33,343
CZ14	SDG&E	42,224	-441	8.6	14%	\$66,649	\$211,529	\$106,913	3.2	1.6	\$144,880	\$40,264
CZ14-2	SCE*	42,224	-441	8.6	14%	\$66,649	\$95,809	\$106,913	1.4	1.6	\$29,160	\$40,264
CZ15	SCE	45,723	-147	11.2	12%	\$66,649	\$102,714	\$118,034	1.5	1.8	\$36,065	\$51,384
CZ16	PG&E	37,758	-736	5.8	14%	\$66,649	\$145,947	\$79,755	2.2	1.2	\$79,297	\$13,106
CZ16-2	LADWP	37,758	-736	5.8	14%	\$66,649	\$40,115	\$79,755	0.6	1.2	(\$26,534)	\$13,106

2019-07-25

Figure 18. Cost Effectiveness for Medium Office Package 1B - Mixed-Fuel + EE + PV + B

CZ	Utility	Elec Savings (kWh)	Gas Savings (therms)	GHG savings (mtons)	Comp- lîance Margin (%)	Incremental Package Cost	Lifecycle Energy Cost Savings	\$-TDV Savings	B/C Ratio (On-bill)	B/C Ratio (TDV)	NPV (On- bill)	NPV (TDV)
Mixed F	uel + PV +	Battery						Explain Military				
CZ01	PG&E	211,225	-808	39.9	18%	\$397,405	\$645,010	\$454,284	1.6	1,1	\$247,605	\$56,879
CZ02	PG&E	255,787	-505	50.6	17%	\$397,405	\$819,307	\$573,033	2.1	1.4	\$421,902	\$175,628
CZ03	PG&E	245,421	-463	48.8	20%	\$397,405	\$777,156	\$536,330	2.0	1.3	\$379,751	\$138,925
CZ04	PG&E	267,612	-547	52.7	14%	\$397,405	\$836,221	\$597,471	2.1	1.5	\$438,816	\$200,066
CZ04-2	CPAU	267,612	-547	52.7	14%	. \$397,405	\$621,879	\$597,471	1.6	1.5	\$224,474	\$200,066
CZ05	PG&E	264,581	-499	52.5	18%	\$397,405	\$897,216	\$578,856	2.3	1.5	\$499,811	\$181,451
CZ05-2	SCG	264,581	-499	52.5	18%	\$397,405	\$899,487	\$578,856	2.3	1.5	\$502,082	\$181,451
CZ06	SCE	257,474	· - 305	52.1	20%	\$397,405	\$484,229	\$594,416	1.2	1.5	\$86,824	\$197,011
CZ06-2	LA	257,474	-305	52.1	20%	\$397,405	\$282,360	\$594,416	0.7	1.5	(\$115,045)	\$197,011
. CZ07	SDG&E	264,530	-6	55.7	20%	\$397,405	\$817,528	\$610,548	2.1	1.5	\$420,123	\$213,143
CZ08 -	SCE	258,348	-60	54.0	18%	\$397,405	\$479,073	\$625,249	1.2	1.6	\$81,668	\$227,844
CZ08-2	LA	258,348	± -60	54.0	18%	\$397,405	\$275,704	\$625,249	0.7	1.6	(\$121,701)	\$227,844
CZ09	SCE	262,085	-210	54.3	16%	\$397,405	\$480,241	\$622,528	1.2	1.6	\$82,836	\$225,123
CZ09-2	LA	262,085	-210	54.3	16%	\$397,405	\$282,209	\$622,528	0.7	1.6	(\$115,196)	\$225,123
CZ1D	SDG&E	258,548	-216	53.4	17%	\$397,405	\$839,931	\$595,323	2.1	1.5	\$442,526	\$197,918
CZ10-2	SCE	258,548	-216	53.4	17%	\$397,405	\$485,523	\$595,323	1.2	1.5	\$88,118	\$197,918
CZ11	PG&E	253,623	-390	50.9	13%	\$397,405	\$826,076	\$585,682	2.1	1,5	\$428,671	\$188,277
CZ12	PG&E	252,868	- 466	50.3	14%	\$397,405	\$802,715	\$582,866	2.0	1.5	\$405,310	\$185,461
CZ12-2	SMUD	252,868	-466	50.3	14%	\$397,405	\$415,597	\$582,865	1.0	1.5	\$18,192	\$185,461
CZ13	PG&E	250,915	-434	50.4	13%	\$397,405	\$806,401	\$573,606	2.0	1.4	\$408,996	\$176,201
CZ14	SDG&E	283,684	-441	56.4	14%	\$397,405	\$874,753	\$676,271	2.2	1.7	\$477,348	\$278,866
.CZ14-2	SCE	283,684	-441	56.4	. 14%	\$397,405	\$493,888	\$676,271	1.2	1.7	\$96,483	\$278,866
CZ15	SCE	274,771	-147	56.0	12%	\$397,405	\$476,327	\$640,379	1.2	1.6	\$78,922	\$242,974
CZ16	PG&E	266,490	-736	51.8	14%	\$397,405	\$842,205	\$575,563	2.1	1.4	\$444,800	\$178,158
CZ16-2	LA ·	266,490	-736	51.8	14%	\$397,405	\$260,372	\$575,563	0.7	1.4	(\$137,033)	\$178,158

Figure 19. Cost Effectiveness for Medium Office Package 1C - Mixed-Fuel + HE

	T :::	Elec		GHG	Comp-	Medium Omi	Lifecycle.		B/C	B/C		
		Savings	Gas Savings	Reductions	liance	Incremental	Utility Cost	\$TDV	Ratio	Ratio	NPV (On-	NPA
CZ	Utility	(kWh)	(therms)	(mtons)	Margin	Package Cost	Savings	Savings	(On-bill)	(TDV)	bill)	(TDV)
Package	1C: Mixed	fuel + HE										
CZ01	PG&E	288	688	4.1	3%	\$61,253	\$18,656	\$12,314	0.3	0.2	(\$42,597)	(\$48,939)
CZ02	PG&E	3,795	550	4.3	4%	\$68,937	\$36,683	\$24,676	0.5	0.4	(\$32,254)	(\$44,261)
CZ03	PG&E	1,241	439	2.9	3%	\$57,529	\$20,150	\$11,885	0.4	~ 0.2	(\$37,379)	(\$45,644)
CZ04	PG&E	5,599	529	4.7	5%	\$72,074	\$44,915	\$30,928	0.6	0,4	(\$27,158)	(\$41,145)
CZ04-2	CPAU	5,599	529	4.7	5%	\$72,074	\$24,175	\$30,928	0.3	0.4	(\$47,898)	(\$41,145)
CZ05	PG&E	3,470	453	3.6	4%	\$60,330	\$35,072	\$18,232	0.6	0,3	(\$25,258)	(\$42,097)
CZ05-2	SCG	3,470	453	3.6	4%	\$60,330	\$32,777	\$18,232	0.5	0.3	(\$27,553)	(\$42,097)
CZ06	SCE	3,374	298	2.6	3%-	\$55,594	\$19,446	\$16,132	0.3	0.3	(\$36,148)	(\$39,462)
CZ06-2	LADWP	3,374	+ 298	2.6	-3%	. \$55,594	\$13,450	\$16,132	0.2	0.3	(\$42,145)	(\$39,462)
CZ07 - ·	SDG&E	5,257	140	2.3	4%	\$54,111	\$41,086	\$19,903	0.8	0.4	(\$13,025)	(\$34,208)
CZ08	SCE	5,921	176	2.7		497, \$60	\$22,210	\$24,055	0.4	0,4	(\$38,287)	(\$36,442)
CZ08-2	LADWP	5,921	176	2.7	4%	\$60,497	\$14,064	\$24,055	0.2	0.4	(\$46,434)	(\$36,442)
CZ09	SCE	7,560	224	3.5	4%	\$61,311	\$28,576	\$31,835	0.5	0,5	(\$32,735)	(\$29,476)
CZ09-2	LADWP	7,560	224	3.5	4%	\$61,311	\$18,262	\$31,835	0.3	0.5	(\$43,049)	(\$29,476)
CZ10	SDG&E	5,786	288	3.2	4%	\$62,685	\$50,717	\$24,628	0.8	0.4	(\$11,968)	(\$38,057)
CZ10-2	SCE	5,786	288	3.2	4%	\$62,685	\$24,575	\$24,628	0.4	0.4	(\$38,110)	(\$38,057)
CZ11	PG&E	8,128	441	4.9	5%.	\$71,101	\$54,188	\$37,849	0.8	0,5	(\$16,912)	(\$33,252)
CZ12	PG&E	6,503	478	4.7	. 5%	\$68,329	\$47,329	\$34,556	0.7	0.5	(\$20,999)	(\$33,773)
CZ12-2	SMUD	6,503	47.8	4.7	5%	\$68,329	\$24,003	\$34,556	0.4	0,5	_(\$44,325)	(\$33,773)
CZ13	PG&E	8,398	432	5.0	- 5%	\$69,474	\$51,347	\$37,229	0.7	- 0.5	(\$18,128)	(\$32,246)
CZ14	SDG&E	7,927	470	5.0	5%	\$69,463	\$62,744	\$37,133	0.9	0.5	(\$6,718)	. (\$32,329)
CZ14-2	SCE	7,927	470	5.0	5%	\$69,463	\$32,517	\$37,133	0.5	0,5	(\$36,946)	(\$32,329)
CZ15	SCE	15,140	219	5.5	5%	\$66,702	\$43,773	\$52,359	0.7	0.8	(\$22,929)	(\$14,344)
CZ16	PG&E	3,111	912	6.3	5%	\$71,765	\$36,002	\$24,914	0.5	0.3	(\$35,763)	(\$46,851)
CZ16-2	LADWP	3,111	912	6.3	5%	\$71,765	\$23,057	\$24,914	0.3	0.3	(\$48,708)	(\$46,851)

Figure 20. Cost Effectiveness for Medium Office Package 2 - All-Electric Federal Code Minimum

CZ	Utility	Elec Savings (kWh)	Gas Savings (therms)	GHG Reductions (mtons)	Comp- liance Margin	Incremental Package Cost*	Lifecycle Utility Cost Savings	\$TDV Savings	B/C Ratio (On-bill)	B/C Ratio (TDV)	NPV (On- bill)	NPV (TDV)
Package	2: All-Elec	tric Federal C	ode Minimum		iku pytak					v\$-02(,);;()		A
CZ01	PG&E	-53,657	4967	10.1	-15%	(\$87,253)	(\$98,237)	(\$58,420)	0.9	1.5	(\$10,984)	\$28,833
CZ02	PG&E	-49,684	3868	5.0	-7%	(\$73,695)	(\$101,605)	(\$41,429)	0.7	1.8	(\$27,910)	\$32,266
CZ03	PG&E	-35,886	3142	5.6	-7%	(\$82,330)	(\$57,345)	(\$29,592)	1,4	2.8	\$24,986	\$52,738
CZ04.	PG&E	-48,829	3759	4.7	-6%	(\$69,012)	(\$90,527)	(\$40,570)	0.8	1.7	(\$21,515)	\$28,443
CZ04-2	CPAU	-48,829	3759	4.7	-6%	(\$69,012)	(\$19,995)	(\$40,570)	3.5	1.7	\$49,018	\$28,443
CZ05	PG&E	-40,531	3240	4.5	-8%	(\$84,503)	(\$63,663)	(\$39,997)	1.3	2.1	\$20,840	\$44,506
CZ06	SCE	-26,174	2117	3.1	-4%	(\$76;153)	\$24,908	(\$20,571)	// >1	3.7	\$101,061	\$55,581
CZ06-2	LADWP	-26,174	2117	3.1	-4%	(\$76,153)	\$26,366	(\$20,571)	:>1	3.7	\$102,518	\$55,581
CZÓ7	SDG&E	-12,902	950	0.9	-2%	(\$70,325)	\$46,879	(\$11,407)	>1	6.2	\$117,204	\$58,918
CZ08	SCE	-15,680	1219	1.5	-2%	(\$68,774)	\$17,859	(\$12,648)	>1	5.4	\$86,633	\$56,125
CZ08-2	LADWP	-15,680	1219	1.5	-2%	(\$68,774)	\$18,603	(\$12,648)	>1	5.4	\$87,376	\$56,125
CZ09	SCE	-19,767	1605	2.4	-2%	(\$63,102)	\$20,920	(\$14,462)	>1	4.4	\$84,022	\$48,640
CZ09-2	LADWP	-19,767	1605	2.4	-2%	(\$63,102)	\$21,929	(\$14,462)	>1	4.4	\$85,030	\$48,640
CZ10	SDG&E	-27,414	2053	2.2	-4%	(\$47,902)	\$38,918	(\$23,339)	>1	2.1	\$86,820	\$24,562
CZ10-2	SCÉ	-27,414	2053	2.2	-4%	(\$47,902)	\$20,765	(\$23,339)	.>1	2.1	\$68,666	\$24,562
CZ11	PG&E	-40,156	3062	3.6	-4%	(\$63,987)	(\$72,791)	(\$32,837)	0.9	1.9	(\$8,804)	\$31,150
CZ12	PG&E	-43,411	3327	4.1	-5%	(\$68,343)	(\$85,856)	(\$35,463)	0.8	1.9	(\$17,512)	÷\$32,880
CZ12-2	SMUD	-43,411	3327	4.1	-5%	(\$68,343)	(\$5,109)	(\$35,463)	13.4	1.9	\$63,234	\$32,880
.CZ13.	PG&E	-39,649	3063	3.8	-4%	(\$62,726)	(\$70,705)	(\$32,408)	0.9	1.9	(\$7,980)	\$30,318
CZ14	SDG&E	-44,322	3266	3.4	-5%	(\$65,156)	\$6,043	(\$38,422)	>1	1.7	\$71,199	\$26,735
CZ14-2	SCE	-44,322	3266	3,4	-5%	(\$65,156)	\$4,798	(\$38,422)	>1	1.7	\$69,954	\$26,735
CZ15	SCE	-19,917	1537	1.8	-2%	(\$36,176)	\$12,822	(\$15,464)	>1	2.3	\$48,998	\$20,711
CZ16	PG&E	-94,062	6185	5.6	-27%	(\$64,096)	(\$212,158)	(\$150,871)	0.3	0.4	(\$148,062)	(\$86,775)
CZ16-2	LADWP	-94,062	6185	5.6	-27%	(\$64,096)	\$1,493	(\$150,871)	े तम् (- >1	0.4	\$65,589	. (\$86,775)

^{*}The Incremental Package Cost is equal to the sum of the incremental HVAC and water heating equipment costs from

Figure 10, the electrical infrastructure incremental cost of \$27,802 (see section 3.3.2.1), and the natural gas infrastructure incremental costs of \$(18,949) (see section 3.3.2.2).



Figure 21. Cost Effectiveness for Medium Office Package 3A - All-Electric + EE

		Elec	5	GHG	Comp-	Incremental	Lifecycle	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	B/C	B/C		· · · ·
		Savings	Gas Savings	Reductions	liance	Package	Utility Cost	STDV	Ratio	Ratio	NPV (On-	NPV
CZ	Utility	(kWh)	(therms)	(mtons)	Margin	Cost	Savings	Savings	(On-bill)	(TDV)	bill)	(TDV)
Package 3A: All-Electric + EE											WW. Orkeley	
CZ01	PG&E	-19,115	4967	19.4		(\$20,604)	\$20,630	\$28,112	// >1	## () () 1 5	\$41,234	\$48,716
CZ02.	PG&E	-11,811	3868	15.2	10%	(\$7,046)	\$39,260	\$58,563	(1045) \$1	非常第5 1	\$46,306	\$65,609
CZ03	PG&E	2,530	3142	16.2	16%	(\$15,681)	\$85,241	\$68,682	1250 051	>1	\$100,922	\$84;363
·CZ04	PG&E	-10,839	3759	14.8	9%	(\$2,363)	\$59,432	\$58,420	191	建筑图》>1 "	\$61,795	\$60,783
CZ04-2	CPAU	-10,839	3759	14.8	9%	(\$2,363)	\$70,680	\$58,420	>1	>1	\$73,043	\$60,783
C205	PG&E	-2,316	3240	14.6	12%	(\$17,854)	\$85,380	\$58,802	FF 51	>1	\$103,234	\$76,656
CZ06	SCE:	15,399	2117	14.3		(\$9,503)	\$114,962	\$89,921	i//:>1:	>1	\$124,466	\$99,425
CZ06-2	LADWP	15,399	2117	14.3	18%	(\$9,503)	\$82,389	\$89,921		>1	\$91,893	\$99,425
CZ07:	SDG&E	33,318	950	13.8	20%	(\$3,676)	\$256,704	\$111,399	>1		\$260,380	\$115,076
ÇZ08	SCE:	30,231	1219	14.2	18%	(\$2,124)	\$110,144	\$111,781	>1	12.51	\$112,268	\$113,906
CZ08-2	LADWP:	30,231	1219	14.2	- 18%	(\$2,124)	\$76,069	\$111,781	>1	71	\$78,194	\$113,906
CZ09	SCE	24,283	1605	14.3	15%	\$3,547	\$119,824	\$108,249	33.8	30.5	\$116,277	\$104,702
CZ09-2	LADWP	24,283	1605	14.3	15%	\$3,547	\$83,549	\$108,249	23.6	30.5	\$80,001	\$104,702
CZ10	SDG&E	12,344	2053	12.6	13%	\$18,748	\$230,553	\$82,905	12.3	4,4	\$211,806	\$64,158
CZ10-2	SCE	12,344	2053	12.6	13%	\$18,748	\$105,898	\$82,905	5.6	4.4	\$87,150	\$64,158
CZ11	PG&E	929	3062	14.5	10%	\$2,662	\$85,988	\$75,030	32.3	28.2	\$83,326	\$72,368
CZ12	PG&E	-3,419	3327	14.8	10%	(\$1,694)	\$68,866	\$69,589	>1	****** >1 .	\$70,560	\$71,283
CZ12-2	SMUD	-3,419	3327	14.8	10%	(\$1,694)	\$71,761	\$69,589	>1		\$73,455	\$71,283
CZ13	PG&E	1,398	- 3063	14.8	9%;	\$3,923	\$89,799	\$71,307	22,9	18.2	\$85,875	\$67,384
CZ14	SDG&E	-5,469	3256	13.5	9%	\$1,493	\$206,840	\$69,016	138.6	46.2	\$205,347	\$67,523
CZ14-2	SCE	-5,469	3266	13.5	-//:2/11/19%	\$1,493	\$94,143	\$69,016	63.1	<∜ 46.2	\$92,650	\$67,523
CZ15	SCE	25,375	1537	13.7		\$30,474	\$114,909	\$104,335	3.8	3.4	\$84,435	\$73,862
CZ16	PG&E	-65,877	6185	12.7	-15%	\$2,553	(\$91,477)	(\$85,673)	-35.8	-33.6	(\$94,030)	(\$88,226)
CZ16-2	LADWP	-65,877	6185	12.7	-15%	\$2,553	\$72,780	(\$85,673)	28.5	-33.6	\$70,227	,(\$88,226).

Figure 22. Cost Effectiveness for Medium Office Package 3B – All-Electric + EE + PV + B

		Elec Savings	Gas Savings	GHG savings	Compliance	Incremental	Lifecycle Energy Cost	\$-TDV	B/C Ratio (On-	B/C Ratio	NPV (On-	
CZ	10U territory	(kWh)	(therms)	(mtons)	Margin (%)	Package Cost	Savings	Savings	bill)	(TDV)	bill)	NPV (TDV)
	c + PV + B	ARTEMETOR	\$7407099(4)		学是不是一种的 是					4.18 (() () () ()		
CZ01	PG&E	157,733	4967	54.9		\$310,152	\$518,421	\$410,945	1.7	1.3	\$208,269	\$100,794
CZ02	PG&E	203,026	3868	57.8	10%	\$323,710	\$692,336	\$532,273	2.1	1.6	\$368,626	\$208,563
CZ03	PG&E	211,706	3142	58.0	16%	\$315,075	\$708,235	\$520,866	2.2	1.7	\$393,160	\$205,791
CZ04	PG&E	216,204	3759	59.9	9%	\$328,393	\$741,382	\$560,576	2.3	1.7	\$412,989	\$232,183
CZ04-2	CPAU-	215,204	3759	59.9	- 9%	\$328,393	\$607,074	\$560,576	1.8	1.7	\$278,681	\$232,183
CZ05	PG&E	223,399	3240	59.8	12%	\$312,902	\$799,992	\$546,592	2.6	1.7	\$487,090	\$233,690
CZ06	SCE	233,299	2117	57.7	18%	\$321,252	\$509,969	\$583,963	1.6	1.8	\$188,716	\$262,711
CZ06-2:	LA	233,299	2117	57,7	18%	\$321,252	\$311,931	\$583,963	1.0	1.8	(\$9,322)	\$262,711
CZ07	SDG&E	256,034	950	58.3	20%	\$327,079	\$870,156	\$609,498	2.7	1.9	\$543,076	\$282,419
CZ08	SCE	246,944	1219	57.4	18%	\$328,631	\$499,506	\$623,292	1.5	1.9	\$170,874	\$294,661
CZ08-2	LA	246,944	- 1219	57.4	18%	\$328,631	\$296,991	\$623,292	0.9	1.9	(\$31,640)	\$294,661
CZ09	SCE:	243,838	1605	58.5	15%	\$334,303	\$504,498	\$615,178	1.5	1.8	\$170,195	\$280,875
CZ09-2	LA.	243,838	1605	58.5	15%	\$334,303	\$307,626	\$615,178	0.9	1.8	(\$26,677)	\$280,875
CZ10	SDG&E	229,044	2053	56.2	13%	\$349,503	\$851,810	\$569,549	2.4	1,6	\$502,306	\$220,046
CZ10-2	SCE	229,044	2053	56.2	13%	.\$349,503	\$491,383	\$569,549	1.4	1.6	\$141,880	\$220,046
CZ11	PG&E	212,047	3062	56.4	10%	\$333,418	\$743,403	\$556,758	2.2	1,7	\$409,985	\$223,340
CZ12	PG&E	207,955	3327	56.7	10%	\$329,062	\$713,054	\$552,415	2.2	1.7	\$383,993	\$223,353
CZ12-2	SMUD	207,955	3327	56.7	10%	\$329,062	\$414,371	\$552,415	1.3	1.7	\$85,310	\$223,353
CZ13	P.G&E	209,431	3063	56.3	9%	\$334,679	\$728,822	\$544,969	2.2	1.6	\$394,143	\$210,289
CZ14	SDG&E	236,002	3266	61.3	9%	\$332,249	\$865,181	\$638,517	2.6	1.9	\$532,933	\$306,269
CZ14-2	SCE	236,002	3266	61.3	9%	\$332,249	\$488,163	\$638,517	1.5	1.9	\$155,914	\$306,269
CZ15	SCE	254,426	:1537	58.5	10%	\$361,229	\$487,715	\$626,728	1.4	1.7	\$126,486	\$265,499
CZ16	PG&E	162,915	6185	58.6	-15%	\$333,309	\$580,353	\$406,746	: 1.7	1.2	\$247,044	\$73,437
CZ16-2	LA /	162,915	6185	58.6	-15%	\$333,309	\$290,566	\$406,746	0.9	1.2	(\$42,742)	\$73,437



Figure 23. Cost Effectiveness for Medium Office Package 3C - All-Electric + HE

		Г	igure 25.	COSCERECTI	ventess to	r Mealum U	nice rackage	620-WIL-		TILL		
CZ	Utility	Elec Savings (kWh)	Gas Savings (therms)	GHG Reductions (mtons)	Comp- liance Margin	Incremental Package Cost	Lifecycle Utility Cost Savings	\$TDV Savings	B/C Ratio (On- bill)	B/C Ratio (TDV)	NPV (On- bill)	:NPV (TDV)
Package	3C: All-Ele	ectric + HE							X-140 14			
CZ01	PG&E	-53,390	4967	10.2	-14%	(\$43,987)	(\$93,740)	(\$57,752)	.0.5	0.8	(\$49,753)	(\$13,765)
CZ02	PG&E	-45,916	3868	6.1	-5%	(\$22,722)	(\$77,212)	(\$26,394)	0.3	0.9	(\$54,490)	(\$3,672)
CZ03	PG&E	-34,656	3142	6.0	-6%	(\$38,261)	(\$45,796)	(\$25,153)	0.8	1,5	(\$7,535)	\$13,108
CZ04	PG&E	-43,248	3759	6.3	-3%	(\$15,229)	(\$56,932)	(\$18,996)	0.3.	0.8	(\$41,703)	(\$3,767)
CZ04-2	CPAU	-43,248	3759	6.3	-3%	(\$15,229)	(\$5,298)	(\$18,996)	2.9	8.0	\$9,932	(\$3,767)
CZ05	PG&E	-37,068	3240	5.4	-6%	(\$40,434)	(\$38,330)	(\$29,544)	1057451.1	1.4	\$2,104	\$10,890
CZ06	SCE	-22,805	2117	4.0	-2%	(\$30,237)	\$39,812	(\$9,594)		3.2	\$70,050	\$20,644
CZ06-2	LADWP	-22,805	2117	4.0	-2%	(\$30,237)	\$35,414	(\$9,594)	第4.51	3.2	\$65,651	\$20,644
CZ07	SDG&E	-7,646	950	2.5	1%	(\$22,564)	\$86,159	\$6,062	>1	> ≽1	\$108,722	\$28,625
CZ08	SCE.	-9,761	1219	3.2	1%	(\$18,443)	\$37,375	\$8,305	>1	到351	\$55,818	\$26,748
CZ08-2	LADWP	-9,761	1219	. 3.2,	1%	(\$18,443)	\$29,973	\$8,305	***** > 1*	>1	\$48,416	\$26,748
CZ09	SCE	-12,211	1605	4.5	2%	(\$10,282)	\$46,335	\$13,364	7-1-1-21		\$56,617	\$23,646
CZ09-2	LADWP	-12,211	1605	4.5	2%	(\$10,282)	\$37,030	\$13,364	>1	>1	\$47,313	\$23,646
CZ10	SDG&E	-21,642	2053	3.7	-1%	\$11,340	\$84,901	(\$3,818)	7.5	-0.3	\$73,561	(\$15,158)
CZ10-2	SCE	-21,642	2053	. 3.7	-1%	\$11,340	\$40,659	(\$3,818)	3.6	-0.3	\$29,319	(\$15,158)
CZ11	PG&E	-32,052	3062	5.9	0%	(\$8,519)	(\$29,013)	(\$3,007)	0.3	2.8	(\$20,495)	\$5,512
CZ12	PG&E	-36,926	3327	6.0	-1%	(\$15,443)	(\$48,955)	(\$9,546)	0.3	1.6	(\$33,511)	\$5,898
CZ12-2	SMUD	-36,926	3327	6.0	~1%	(\$15,443)	\$9,916	(\$9,546)	>1	1.6	\$25,359	\$5,898
CZ13	PG&E	-31,253	3063	6.3	0%	(\$7,257)	(\$27,782) -	(\$3,055)	0.3	2.4	(\$20,525)	\$4,202
CZ14	SDG&E	-36,402	3266	5.7	-1%	(\$10,651)	\$61,605	-(\$9,832)	>1	1.1	\$72,256	\$819
CZ14-2	5CE	-36,402	3266	5.7	-1%	(\$10,651)	\$30,625	(\$9,832)	15.5	1.1	\$41,276	\$819
CZ15	SCE	-4,775	1537	6.0	3%:	\$28,927	\$52,955	\$32,790	1.8	1,1	\$24,028	\$3,863
CZ16	PG&E	-90,949	6185	6.5	-26%	(\$8,467)	(\$194,115)	(\$142,041)	0.0	0.1	(\$185,648)	(\$133,574)
CZ16-2	LADWP	-90,949	6185	6.5	-26%	(\$8,467)	\$37,127	(\$142,041)	>1	0.1	\$45,594	(\$133,574)

4.2 Cost Effectiveness Results – Medium Retail

Figure 24 through Figure 30 contain the cost-effectiveness findings for the Medium Retail packages. Notable findings for each package include:

♦ 1A - Mixed-Fuel + EE:

- Packages achieve +9% to +18% compliance margins depending on climate zone, and all packages are cost effective in all climate zones.
- Incremental package costs vary across climate zones because of the HVAC system size in some climate zones are small enough (<54 kBtu/h) to have the economizers measure applied.</p>
- B/C ratios are high compared to other prototypes because the measures applied are primarily low-cost lighting measures. This suggests room for the inclusion of other energy efficiency measures with lower cost-effectiveness to achieve even higher compliance margins for a cost effective package.
- ♦ 1B Mixed-Fuel + EE + PV + B: All packages are cost effective using both the On-Bill and TDV approach, except On-Bill in LADWP territory. Adding PV and battery to the efficiency packages reduces the B/C ratio but increases overall NPV savings.
- † 1C Mixed-fuel + HE: Packages achieve +1 to +4% compliance margins depending on climate zone, and packages are cost effective in all climate zones except CZs 1, 3 and 5 using the TDV approach.

♦ 2 – All-Electric Federal Code-Minimum Reference:

- Packages achieve between -12% and +1% compliance margins depending on climate zone.
- Packages achieve positive savings using both the On-Bill and TDV approaches in CZs 6-10 and 14-15. Packages do not achieve On-Bill or TDV savings in most of PG&E territory (CZs 1, 2, 4, 5, 12-13, and 16).
- Packages are cost effective in all climate zones except CZ16.
- All incremental costs are negative primarily due to elimination of natural gas infrastructure.
- ♦ 3A All-Electric + EE: Packages achieve between +3% and +16% compliance margins depending on climate zone. All packages are cost effective in all climate zones.
- ♦ 3B All-Electric + EE + PV + B: All packages are cost effective using both the On-Bill and TDV approaches, except On-Bill in LADWP territory. Adding PV and Battery to the efficiency package reduces the B/C ratio but increases overall NPV savings.
- 3C All-Electric + HE: Packages achieve between -8% and +5% compliance margins depending on climate zone, and packages are cost effective using both On-Bill and TDV approaches in all CZs except CZs 1 and 16.



33 2019-07-25

Figure 24. Cost Effectiveness for Medium Retail Package 1A - Mixed-Fuel + EE

	T * .	Elec	Suic 21, C	GHG	Comp-	Medium Reta	Lifecycle	II PALAC	B/C	B/C	T	· ,
	 .	Savings	Gas Savings	Reductions	liance	Incremental	Utility Cost	STDV	Ratio	Ratio	NPV (On-	NPV
. CZ	Utility	(kWh)	(therms)	(mtons)	Margin "	Package Cost	Savings	Savings	(On-bill)	(TDV)	bill)	(TDV)
Package	1A: Mixe	d Fuel + EE								ricaina.		Weinigo.
CZ01	PG&E	15,210	1209	11.10	18%	\$2,712	\$68,358	\$60,189	25:2:	22:2	\$65,646	\$57,478
CZ02	PG&E	18,885	613	8:73	13%	\$5,569	\$76,260	\$59,135	13.7	10.6	\$70,691	\$53,566
CZ03	PG&E	18,772	462	7.87	15%	\$5,569	\$66,813	\$57,135	12.0	/10.3	\$61,244	\$51,566
CZ04:	PG&E	19,100	439	77.84	14%	\$5,569	\$75,989	\$58,036	13.6	10.4	\$70,420	\$52,467
CZ04-2	. CPAU	19,100	439	7.84	14%	\$5,569	\$51,556	\$58,036	9.3	10.4	\$45,987	\$52,467
CZ05	PG&E	17,955	415	7.41	16%	\$5,569	\$63,182	\$55,003	11.3		\$57,613	\$49,435
CZ05-2	SCG	17,955	415	7.41	16%	\$5,569	\$61,810	\$55,003	11.1	19.9	\$56,241	\$49,435
CZ06	SCE	12,375	347	5.54	10%	\$2,712	\$31,990	\$41,401	11.8	15.3	\$29,278	\$38,689
CZ05-2	LADWP	12,375	347	5.54	10%-	\$2,712	\$21,667	\$41,401	8.0	15.3	\$18,956	\$38,689
CZ07	SDG&E	17,170	136	5.65	13%∵	\$5,569	\$73,479	\$49,883	13.2	9.0	\$67,910	\$44,314
CZ08	SCE	12,284	283	* 5,15	10%	\$2,712	\$30,130	\$41,115	11,1-	15.2	\$27,419	\$38,403
CZ08-2	LADWP	12,284	283	5.15	10%	\$2,712	\$20,243	\$41,115	7.5	15.2	\$17,531	\$38,403
CZ09	SCE	13,473	302	5.51	10%	\$5,569	\$32,663	\$46,126	5.9	8.3	\$27,094	\$40,557
CZ09-2	LADWP	13,473	302	5,51	10%	\$5,569	\$22,435	\$46,126	4.0	8.3	\$16,866	\$40,557
CZ10 ,	SDG&E	19,873	267	6.99	12%	\$5,569	\$83,319	\$58,322	15.0	10.5	\$77 _i 751.	\$52,753
CZ10-2	SCE	19,873	267	6.99	12%	\$5,569	\$39,917	\$58,322	7.2	10.5	\$34,348	\$52,753
CZ11	PG&E	21,120	. 578	9.14	13%	\$5,569	\$86,663	\$67,485	15.6	12.1	\$81,095	\$61,916
CZ12	PG&E	20,370	562	₹ 8.85	13%	\$5,569	\$81,028	\$64,409	- 14.6	11.6	\$75,459	\$58,840
CZ12-2	SMUD	20,370	562	8.85	13%	\$5,569	\$44,991	\$64,409	8.1	11.6	\$39,422	\$58,840
CZ13	PG&E	22,115	620	9.98	:::::::::15%::	\$2,712	\$109,484	\$83,109	40.4	30.6	\$106,772	\$80,398
CZ14	SDG&E	25,579	406	9.38	13%	\$2,712	\$116,354	\$80,055	42.9	29.5	\$113,643	\$77,343
CZ14-2	SCE	26,327	383	9.42	13%	\$2,712	\$57,290	\$83,065	21:1	30,6	\$54,578	\$80,354
CZ15	SCE	26,433	169	8.35	12%	\$2,712	\$57,152	\$79,506	21.1	29.3	\$54,440	\$76,794
CZ16	PG&E	15,975	752	8.72	13%	-\$2,712	\$72,427	\$55,025	26.7	20.3	\$69,715	\$52,314
CZ16-2	LADWP	15,975	752	8.72	13%	\$2,712	\$31,906	\$55,025	11.8	20.3	\$29,194	\$52,314

Figure 25. Cost Effectiveness for Medium Retail Package 1B - Mixed-Fuel + EE + PV + B

	T		· GODE BAR	- COLL OALD		m Ketan i ac			B/C			T
	-	Elec	Gas	GHG			Lifecycle		Ratio	B/C		
		Savings	Savings	savings	Compliance	Incremental	Energy Cost	\$-TDV	(On-	Ratio	NPV (On-	NPV
CZ	IOU territory	(kWh)	(therms)	(tons)	Margin (%)	Package Cost	Savings	Savings	bill)	(TDV)	bill)	(TDV)
· · · · · · · · · · · · · · · · · · ·	uel + PV + Batte	7					MARKET NAME.					
CZ01	PG&E	158,584	1209	40.79	18%	\$277,383	\$509,092	\$383,683	1.8	1.4	\$231,709	\$106,300
CZ02	PG&E	189,400	613	43.75	13%	\$280,240	\$590,043	\$465,474	2.1	1.7	\$309,803	\$185,234
CZ03	PG&E	191,016	462	43.52	16%	\$280,240	\$578,465	\$452,795	2.1	1.6	\$298,224	\$172,554
CZ04	PG&E	195,014	439	44.14	14%	\$280,240	\$605,369	\$480,989	2.2	1.7	\$325,129	\$200,748
CZ04-2	CPAU	195,014	439	44.14	. 14%	\$280,240	\$451,933	\$480,989	1.6	1.7	\$171,693	\$200,748
CZ05	PG&E	196,654	415	44.30	16%	\$280,240	\$589,771	\$464,749	2.1	1.7	\$309,530	\$184,509
CZ05-2	SCG	196,654	415	44.30	16%	\$280,240	\$588,407	\$464,749	2.1	1.7	\$308,167	\$184,509
CZ06	SCE	185,903	347	41.61	10%	\$277,383	\$322,495	\$456,596	1.2	1.6	\$45,111	\$179,213
CZ06-2	LA	185,903	347	41.61	10%	\$277,383	\$191,428	\$456,596	• 0.7	1.6	(\$85,955)	\$179,213
CZ07	SDG&E	197,650	136	43.24	13%	\$280,240	\$496,786	\$477,582	1.8	1.7	\$216,545	\$197,342
CZ08	.SCE	187,869	283	41.48	10%	\$277,383	\$326,810	\$478,132	1.2	1.7	\$49,427	\$200,749
CZ08-2	LA	187,869	283	41.48	10%	\$277,383	\$190,379	\$478,132	0.7	1.7	(\$87,004)	\$200,749
CZ09	\$CE ·	191,399	302	42.32	:10%	\$280,240	\$334,869	\$472,770	1.2	1.7	\$54,629	\$192,530
CZ09-2	LA	191,399	302	42.32	10%	\$280,240	\$201,759	\$472,770	0.7	1.7	(\$78,481)	\$192,530
CZ10	SDG&E	200,033	267	44.01	12%	\$280,240	\$547,741	\$472,880	2.0	1.7	\$267,501	\$192,640
CZ10-2	SCE	200,033	267	44.01	12%	\$280,240	\$340,822	\$472,880	1.2	1.7	\$60,582	\$192,640
CZ11	PG&E	192,846	578	44.07	13%	\$280,240	\$582,969	\$490,855	2.1	1.8	\$302,728	\$210,615
CZ12	PG&E	191,720	562	43.70	13%	\$280,240	\$586,836	\$485,076	2.1	1.7	\$306,596	\$204,836
CZ12-2	SMUD	191,720	562	43.70	13%	\$280,240	\$319,513	\$485,076	1.1	1.7	\$39,273	\$204,836
CZ13	PG&E	195,031	620	45.19	15%	\$277,383	\$605,608	\$486,285	2.2	1.8	\$328,225	\$208,901
CZ14	SDG&E	217,183	406	47.86	13%	\$277,383	\$559,148	\$534,915	2.0	1.9	\$281,765	\$257,532
CZ14-2	SCE	217,927	383	47.91	14%	\$277,383	\$354,757	\$538,058	1.3	1.9	\$77,373	\$250,674
CZ15	SCE	208,662	169	44.51	12%	\$277,383	\$338,772	\$496,107	1.2	1.8	\$61,389	\$218,724
CZ16	PG&E	210,242	7.5.2	48.76	13%	\$277,383	\$608,779	\$490,262	2.2	1.8	\$331,395	\$212,879
CZ16-2	LA	210,242	752	48.76	13%	\$277,383	\$207,160	\$490,262	0.7	1.8	(\$70,223)	\$212,879



Figure 26. Cost Effectiveness for Medium Retail Package 1C - Mixed-Fuel + HE

		Elec		GHG	Comp-	reulum Keta	Lifecycle		B/C	B/C		T
	* *:	Savings	Gas Savings	Reductions	liance	Incremental	Utility Cost	\$TDV	Ratio	Ratio	NPV (On-	NPV
CZ	Utility .	(kWh)	(therms)	(mtons)	Margin	Package Cost	Savings	Savings	(On-bill)	(TDV)	bill)	(TDV)
Package	1C: Mixed	Fuel + HE									To the second of	
CZ01	PG&E		346	2.04	2%	\$9,006	\$6,301	\$6,065	0.7	. 0.7	. (\$2,705)	(\$2,941)
CZ02	PG&E	2,288	229	2.01	3%	\$9,726	\$23,016	\$13,998	2.4	1.4	\$13,291	\$4,273
CZ03	PG&E	1,087	171	1.31	. 2%	\$9,063	\$6,782	\$7,186	· · · · · · 0;7	0.8	(\$2,282)	(\$1,877)
CZ04 -	PG&E	1,862	159	1.46	- 3%	\$9,004	\$17,891	\$10,878	2:0	1.2	\$8,887	\$1,874
CZ04-2	CPAU	1,862	159	1.46	3%	\$9,004	\$7,821	\$10,878	0.9	1.2	(\$1,182)	\$1,874
CZ05	PG&E	664	162	1.11	1%	\$9,454	\$5,119	\$4,725	. 0.5	0.5	(\$4,335)	(\$4,729)
CZ05-2	SCG	- 664	162	1:11	1%	\$9,454	\$4,558	\$4,725	0.5	. 0.5	(\$4,896)	(\$4,729)
CZ06	SCE	2,648	90	1.24	3%	\$8,943	\$11,646	\$11,427	1.3	1.3	\$2,703	\$2,484
CZ06-2	LADWP	2,648	90.	1.24	3%	\$8,943	\$7,329	\$11,427	0.8	1.3	(\$1,614)	\$2,484
CZ0.7	SDG&E	2,376	: 49	0.95	2%	\$9,194	\$20,103	\$9,779	2.2	物源。1.1	\$10,909	\$585
CZ08	SCE:	2,822	72	1:20	3%	\$9,645	\$11,989	\$12,877	1.2	1.3	\$2,344	\$3,233
CZ08-2	LADWP	2,822	72	1.20	3%	\$9,645	\$7,427	\$12,877	0.8	1.3	(\$2,218)	\$3,233
CZ09	SCE	4,206	88	1.73	4%	\$10,446	\$16,856	\$18,745	1.6	1.8	\$6,410	\$8,299
CZ09-2	LADWP	4,206	88	1.73	4%	\$10,446	\$10,604	\$18,745	1.0	7 1.8	\$158	\$8,299
CZ10	:SDG&E	4,226	119	1.88	4%	\$9,514	\$36,412	\$19,008	3.8	2.0	\$26,898	\$9,494
CZ10-2	SCE	4,226	119	1.88	4%.	\$9,514	\$17,094	\$19,008	1.8	2.0	\$7,580	\$9,494
CZ11	PG&E	4,188	225	2,56	4%	\$10,479	\$31,872	\$22,393	3.0	2.1	\$21,392	\$11,913
CZ12	PG&E	3,675	214	2:34	4%	\$10,409	\$29,653	\$20,525	-2.8	2.0	\$19,243	\$10,115
CZ12-2	SMUD	3,675	214	2,34	4%	\$10,409	\$12,823	\$20,525	1.2	<i>></i>	\$2,414	\$10,115
CZ13	PG&E	4,818	180	2.46	4%	. \$9,809	\$34,149	\$23,623	3.5	2.4	\$24,340	\$13,814
CZ14	SDG&E	6,439	153	2.71	.4%	\$12,103	\$44,705	\$26,348	3.7	2,2	\$32,601	\$14,245
CZ14-2	SCE	6,439	153	2.71	4%	\$12,103	\$22,032	\$26,348	1.8	2.2	\$9,929	\$14,245
CZ15	SCE	8,802	48	2.76	5%	\$12,534	\$25,706	\$31,402	2.1	2.5	\$13,171	\$18,868
CZ16	PG&E	2,316	390	2.97	3%	\$11,999	\$22,663	\$13,888	1,9	1.2	\$10,665	\$1,890
CZ16-2	LADWP:	2,316	390	2.97	3%	\$11,999	\$11,921	\$13,888	1.0	1.2	(\$78)	\$1,890

36 2019-07-2

Figure 27. Cost Effectiveness for Medium Retail Package 2 - All-Electric Federal Code Minimum

		Elec	Gas	GHG	Comp-		Lifecycle		B/C	B/C		
		Savings	Savings	Reductions	liance	Incremental	Utility Cost	\$TDV	Ratio	Ratio	NPV (On-	NPV
CZ	Utility	(kWh)	(therms)	(mtons)	Margin	Package Cost*	Savings	Savings	(On-bill)	(TDV)	bill)	(TDV)
Package	2: All-Elec	tric Federal C	ode Minimum	<u> 1805 - 180 - 180 - 180 - 180 - 180 - 180 - 180 - 180 - 180 - 180 - 180 - 180 - 180 - 180 - 180 - 180 - 180 -</u>						4 m ()		
CZ01	PG&E	-29,155	3893	13.85	-4.1%	(\$23,048)	(\$8,333)	(\$13,910)	2.8	1.7	\$14,715	\$9,138
CZ02	PG&E	+21,786	2448	7.49	-1.0%	(\$27,464)	(\$16,476)	(\$4,483)	1.7	6.1	\$10,987	\$22,981
CZ03	PG&E	-14,583	1868	6.26	-0.4%	(\$24,111)	\$263	(\$1,450)	>1	16.6	\$24,374	\$22,661
CZ04	PG&E	-14,186	1706	5.30	-0.1%	(\$22,896)	(\$8,753)	(\$220)	2.6	104.2	\$14,143	\$22,676
CZ04-2	CPAU	-14,186	1706	5.30	-0.1%	(\$22,896)	. \$12,493	(\$220)	>1	104.2	\$35,389	\$22,676
CZ05	PG&E	-14,334	1746	5.47	-1.2%	(\$25,507)	·· (\$1,567)	(\$4,197)	16.3	6.1	\$23,940	\$21,309
CZ06	SCE	-7,527	1002	3.32	0.5%	(\$21,762)	\$18,590	\$1,868	>1	;;>1.	\$40,351	\$23,630
CZ06-2	LADWP	-7,527	1002	3.32	0.5%	(\$21,762)	\$19,309	\$1,868	-:>1	>1	\$41,071	\$23,630
CZ07	SDG&E	-3,812	522	1.76	-0.3%	(\$23,762)	\$54,345	\$1,318	>1	>1	\$78,107	\$25,080
CZ08	SCE	-5,805	793	2.70	0.4%	(\$26,922)	\$16,735	\$1,846		>1	\$43,658	\$28,768
CZ08-2	LADWP	-5,805	793	2.70	0.4%	(\$26,922)	\$17,130	\$1,846	>1		\$44,052	\$28,768
CZ09	SCE	-7,241	970	3.32	0.4%	(\$32,113)	\$18,582	\$1,978	>1	>1	\$50,695	\$34,091
CZ09-2	LADWP	-7,241	970	3.32	0.4%	(\$32,113)	\$19,089	\$1,978	>1	>1	\$51,202	\$34,091
CZ10	SDG&E	-10,336	1262	3.99	0.1%	(\$27,272)	\$54,453	\$505	>1	>1	\$81,724	\$27,777
CZ10-2	SCE	-10,336	1262	3,99	0.1%	(\$27,272)	\$20,996	\$505	////////>1	>1	\$48,268	\$27,777
CZ11	PG&E	-19,251	2415	7.95	0.5%	(\$32,202)	(\$7,951)	\$2,615	4.1	>1	\$24,251	\$34,817
CZ12 .	PG&E	-19,471	2309	7.28	-0.1%	(\$32,504)	(\$14,153)	(\$461)	2.3	70.4	\$18,351	\$32,042
CZ12-2	SMUD	-19,471	2309	7.28	-0.1%	(\$32,504)	\$12,939	(\$461)	>1	70.4	\$45,443	\$32,042
CZ13	PG&E	-16,819	1983	6.15	-0.4%	(\$28,158)	(\$10,575)	(\$2,022)	2.7	13.9	\$17,582	\$26,136
CZ14	SDG&E	-13,208	1672	5.44	0.7%	(\$26,656)	\$41,117	\$4,461	>1	>1	\$67,772	\$31,117
CZ14-2	SCE	-13,208	1672	5.44	0.7%	(\$26,656)	\$18,467	\$4,461	>1	>1	\$45,123	\$31,117
CZ15	SCE	-2,463	518	2.14	0.9%	(\$29,544)	\$16,796	\$5,823	>1	>1	\$46,339	\$35,367
CZ16	PG&E	-41,418	4304	13.23	-12.2%	(\$25,771)	(\$49,862)	(\$52,542)	.0,5	0.5	(\$24,091)	(\$26,771)
CZ16-2	LADWP	-41,418	4304	13.23	-12.2%	(\$25,771)	\$39,319	(\$52,542)	>1	0.5	\$65,090	(\$26,771)

The Incremental Package Cost is the addition of the incremental HVAC and water heating equipment costs from Figure 11 and the natural gas infrastructure incremental cost sayings of \$28,027 (see section 3.3.2.2).



Figure 28. Cost Effectiveness for Medium Retail Package 3A - All-Electric + EE

		Г.	igure zo. c	OSL EHECLIVE	erre22 101	Medium Keta	an rackage	OH - HII-1	HECLI IU	- EE		<u> </u>
		Elec		GHG	Comp-	+	Lifecycle		B/C	B/C		
		Savings	Gas Savings	Reductions	liance	Incremental	Utility Cost	\$TDV	Ratio	Ratio	NPV (On-	NPV
CZ	Utility	(kWh)	(therms)	(mtons)	Margin	Package Cost	Savings	Savings	(On-bill)	(TDV)	bill)	.(TDV)
Package	3A: All-El	ectric + EE										
CZ01	PG&E	-5,478.	3893	20.64	-15%	(\$20,336)	\$63,593	\$51,224	\$1	>1	\$83,929	\$71,560
CZ02	PG&E	2,843	2448	14.58	13%	(\$21,895)	\$74,997	\$56,893	>1	\$1 /	\$96,892	\$78,788
CZ03	PG&E	7,791	1868	12:73	16%	(\$18,542)	\$68,968	\$56,586	>1"	>1	\$87,511	\$75,128
CZ04	PG&E	8,572	1706	11.89	14%	(\$17,327)	\$81,957	\$57,904	>1	>1	\$99,284	\$75,231
CZ04-2	CPAÜ	8,572	1706	11,89	14%	(\$17,327)	\$63,082	\$57,904	**************************************	>1	\$80,408	\$75,231
CZ05	PG&E	6,973	1746	11.68	15%	(\$19,938)	\$63,677	\$51,949	>1*	>1	\$83,615	\$71,887
CZ06	SCE	7,431	1002	7.72	11%	(\$19,050)	\$47,072	\$42,610	>1	≥1	\$66,122	\$61,660
CZ06-2	LADWP	7,431	1002	7.72	11%	(\$19,050)	\$37,078	\$42,610	>1	>1	\$56,128	\$61,660
CZ07	SDG&E	14,350	522	6.98	13%	(\$18,193)	\$127,461	\$50,828	>1	% >1 %	\$145,654	\$69,021
CZ08	SCE	8,524	793	6.90	10%	(\$24,210)	\$43,679	\$42,258	/>1	>1	\$67,890	\$66,468
CZ08-2	LADWP	8,524	793	6.90	10%	(\$24,210)	\$34,038	\$42,258	\$500 >1	>1	\$58,248	\$66,468
CZ09	ŠCE	8,403	970	7.81	10%	(\$26,545)	\$47,819	\$47,356	//51	>1	\$74,364	\$73,901
CZ09-2	LADWP	8,403	970	7.81	10%	(\$26,545)	\$37,934	\$47,356	>1%	>1.	\$64,478	\$73,901-
CZ10	SDG&E	11,737	1262	10.23	12%	(\$21,703)	\$137,436	\$58,761	F-////F->1"	>1	-\$159,139	\$80,464
CZ10-2	SCE	11,737	1262	. 10.23	12%	(\$21,703)	\$58,257	\$58,761	1 2 2 2	>1	\$79,959	\$80,464
. CZ11	PG&E	5,892	2415	15.13	12%	(\$26,633)	\$85,256	\$65,859	7 51	>1-	*\$111,889 <i>*</i>	\$92,492
CZ12	PG&E	5,548	2309	14.46	12%	(\$26,935)	\$80,631	\$63,903	>1	≥7. (f ≥1)	\$107,566	\$90,838
CZ12-2	SMUD	5,548	2309	14.46	12%	(\$26,935)	\$59,311	\$63,903	>1°	##\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	\$86,246	\$90,838
CZ13	PG&E	10,184	1983	14.15	114%	(\$25,446)	\$110,105	\$80,604	>1	>1	\$135,551	\$106,050
CZ14	SDG&E	16,583	1672	13.83	15%	(\$23,944)	\$171,200	\$88,471	##>1	>1.	\$195,145	\$112,415
CZ14-2	SCE	16,583	1672	13.83	15%	(\$23,944)	\$656,178	\$159,604	>1	3577×1	\$680,122	\$183,548
CZ15	SCE	23,642	518	9.44	12%	(\$26,832)	\$65,573	\$76,781	14 × 14	⁵	\$92,404	\$103,612
CZ16	PG&E	-18,232	4304	19.80	3%	(\$23,059)	\$38,796	\$14,152	\$1	>1	\$61,855	\$37,211
CZ16-2	LADWP	-18,232	4304	19.80	3%	(\$23,059)	\$67,793	\$14,152	>1	- - - - - - - - - - - - -	\$90,852	\$37,211

Figure 29. Cost Effectiveness for Medium Retail Package 3B - All-Electric + EE + PV + B

		Elec Savings	Gas Savings	GHG savings	Compliance	Incremental	Lifecycle Energy Cost	\$-TDV	B/C Ratio (On-	B/C Ratio	NPV (On-	NPV
CZ	IOU territory	(kWh)	(therms)	(tons)	Margin (%)	Package Cost	Savings	Savings	bill)	(TDV)	bill)	(TDV)
All-Elect	ric + PV + B	www			militaring stable	www.tvzthir#sr	Satisfaction (Albert		ENDONE:			
CZ01	PG&E	137,956	3893	50,51	15%	\$254,335	\$510,831	\$374,432	2.0	1.5	\$256,496	\$120,097
CZ02	PG&E	173,387	2448	49.87	13%	\$252,777	\$590,112	\$463;431	2.3	1.8	\$337,336	\$210,654
CZ03	PG&E	180,055	1868	48.55	16%	\$256,129	\$585,861	\$452,399	2.3	1.8	\$329,732	\$196,270
CZ04	PG&E	184,499	1706	48.38	14%	\$257,345	\$608,814	\$481,011	2.4	1.9	\$351,470	\$223,666
CZ04-2	CPAU	184,499	1706	48.38	14%	\$257,345	\$465,690	\$481,011	1.8	1.9	\$208,345	\$223,666
CZ05	.PG&E:	185,690	1746	48.84	15%	\$254,734	\$600,933	\$461,804	2.4	1.8	\$346,199	\$207,071
CZ06	SCE	180,968	1002	43.91	11%	\$255,621	\$335,909	\$457,959	1.3	1.8	\$80,288	\$202,337
CZ06-2	LADWP	180,968	1002	43.91	11%	\$255,621	\$206,021	\$457,959	. 0.8	1.8	(\$49,601)	\$202,337
CZ07	SDG&E	194,837	522	44.67	13%	\$256,478	\$550,714	\$478,637	2.1	1.9	\$294,236	\$222,159
CZ08	SCE	184,120	793	43,32	10%	\$250,461	\$340,301	\$479,406	1.4	1.9	\$89,840	\$228,945
CZ08-2	LADWP	184,120	793	43.32	10%	\$250,461	\$203,813	\$479,406	0.8	1.9	(\$46,648)	\$228,945
CZ09	SCE	186,346	970	44,77	10%	\$248,127	\$349,524	\$474,176	1.4	1.9	\$101,397	\$226,049
CZ09-2	LADWP	186,346	970	44.77	10%	\$248,127	\$216,654	\$474,176	0.9	1.9	(\$31,473)	\$226,049
CZ10	SDG&E	191,923	1262	47.46	12%	\$252,969	\$593,514	\$473,605	2.3	1.9	\$340,545	\$220,636
CZ10-2	SCE	191,923	1262	47.46	12%	\$252,969	\$356,958	\$473,605	1.4	1.9	\$103,989	\$220,636
CZ11	PG&E	177,639	2415	50.26	12%	\$248,039	\$585,689	\$489,317	2.4	2.0	\$337,650	\$241,278
CZ12	PG&E	176,919	2309	49.46	12%	\$247,736	\$591,104	\$484,702	2.4	2.0	\$343,368	\$236,966
CZ12-2	SMUD -	176,919	2309	49.46	12%	\$247,736	\$335,286	\$484,702	1.4	2.0	\$87,550	\$236,966
CZ13	PG&E :	183,129	1983	49.48	14%	\$249,226	\$608,560	\$483,670	2.4	1.9	\$359,334	\$234,444
CZ14	SDG&E	208,183	1672	52.54	15%	\$250,727	\$593,232	\$544,079	2.4	2.2	\$342,505	\$293,351
CZ14-2	SCE	264,589	1672	80.97	15%	\$250,727	\$656,178	\$580,403	2.6	2.3	\$405,450	\$329,676
CZ15	SCE	205,869	518	45.67	12%	\$247,840	\$347,125	\$493,339	1.4	2.0	\$99,285	\$245,499
CZ16	PG&E	176,114	4304	60.13	3%	\$251,612	\$567,822	\$446,795	2.3	1.8	\$316,210	\$195,183
CZ16-2	LADWP .	176,114	4304	60.13	3%	\$251,612	\$241,757	\$446,795	1.0	1.8	(\$9,856)	\$195,183

Figure 30. Cost Effectiveness for Medium Retail Package 3C - All-Electric + HE

		Elec Savings	Gas Savings	GHG Reductions	Comp- liance	Incremental	Lifecycle Utility Cost	\$TDV:	B/C Ratio	B/C Ratio	NPV (On-	NPV
CZ	Utility	(kWh)	(therms)	(mtons)	Margin	Package Cost	Savings	Savings	(On-bill)	(TDV)	bill)	(TDV)
Package	3C: All-Ele	ectric + HE	HARDTANAM						West of a		LYTYHERITE	
CZ01	PG&E	-26,199	3893	14.76	-2%	(\$587)	\$369	(\$5,757)	>1	0.1	\$956	(\$5,170)
CZ02	PG&E	-16,989	2448	8.95	3%	(\$4,211)	\$12,323	, \$11,251	>1	:::>1*	\$16,534	\$15,463
CZ03	PG&E	-11,703	1868	7:15	-2%-	(\$2,213)	\$9,159	\$6,944	>1	'	/ \$11,372°	\$9,157
CZ04	PG&E	-10,675	1706	6.37	3%	(\$316)	\$14,317	\$11,383	>1.	//::×:>1	\$14,633	\$11,700
CZ04-2	CPAU	-10,675	1706	6.37	3%	(\$316)	\$20,599	\$11,383	>1	>1"	\$20,915	\$11,700
CZ05	PG&E	-11,969	1746	6.19	1%	(\$2,298)	\$5,592	\$1,824	\$1		\$7,890	\$4,122
CZ06	SCE "	-3,919	1002	4.35	3%	\$1,418	\$29,751	\$13,734	7. 21:0	9.7	\$28,333	\$12,316
CZ06-2	LADWP	-3,919	1002	4.35	3%	\$1,418	\$25,891	\$13,734	18.3	9.7	\$24,473	\$12,316
CZ07	SDG&E	-955	522	2.59	- 3%	(\$710)	\$74,518	\$11,229	>1	>1	\$75,227	\$11,939
CZ08	SCE	-2,224	793	3.74	4%	(\$3,719)	\$28,067	\$15,075	>1	>1	\$31,785	\$18,793
CZ08-2	LADWP	-2,224	793	3.74	4%	(\$3,719)	\$23,848	\$15,075	>1	##### \$1 #	\$27,566	\$18,793
CZ09	SCE	-2,089	970	4.84		(\$8,268)	\$34,648	\$21,162	**************************************	>14	\$42,916	\$29,430
CZ09-2	LADWP	-2,089	970	4.84	-4%	(\$8,268)	\$28,837	\$21,162	>1	>1	\$37,105	\$29,430
CZ10.	SDG&E:	-4,868	1262	5.58	4%	(\$5,222)	\$91,136	\$20,041	>1	>1	\$96,358	\$25,263
CZ10-2	SCE	-4,858	1262	5.58	S - 4%	(\$5,222)	\$37,200	\$20,041	>1	>1.	\$42,422	\$25,263
CZ11	PG&E: :	-12,651	2415	9.95	5%	(\$8,217)	\$29,015	\$26,172	>1	-1000	\$37,232	\$34,389
CZ12	PG&E	-13,479	2309	9.10	4%	(\$9,239)	\$20,839	\$21,228	>1	/// ×/×/>1×	\$30,078	\$30,466
CZ12-2	SMUD	-13,479	2309	9.10	4%	(\$9,239)	\$26,507	\$21,228	:>1	14 Killing	\$35,746	\$30,466
CZ13	PG&E	-9,935	1983	8.23	4%	. (\$4,975)	\$30,123	\$24,063	55 >1	### !	\$35,097	\$29,037
CZ14	SDG&E	-5,407	1672	7.71	5%	\$121	\$88,669	\$31,029	732.5	256,3	\$88,547	\$30,908
CZ14-2	SCE	-5,407	1672	7.71	5%	\$121	\$40,709	\$31,029	336.3	256.3	\$40,588	\$30,908
CZ15	SCE	6,782	518	4.77	6%	(\$2,508)	\$42,238	\$37,379	>1		\$44,745	\$39,887
CZ16 ·	PG&E	-35,297	4304_	15.03	-8%	\$1,102	(\$21,384)	(\$33,754)	-19.4	-30.6	(\$22,486)	(\$34,856)
CZ16-2	LADWP	-35,297	4304	15.03	-8%	\$1,102	\$48,625	(\$33,754)	44.1	-30.6	\$47,523	(\$34,856)

4.3 Cost Effectiveness Results - Small Hotel

The following issues must be considered when reviewing the Small Hotel results:

- The Small Hotel is a mix of residential and nonresidential space types, which results in different occupancy and load profiles than the office and retail prototypes.
- A potential laundry load has not been examined for the Small Hotel. The Reach Code Teams attempted to characterize and apply the energy use intensity of laundry loads in hotels but did not find readily available data for use. Thus, cost effectiveness including laundry systems has not been examined.
- Contrary to the office and retail prototypes, the Small Hotel baseline water heater is a central gas storage type. Current compliance software cannot model central heat pump water heater systems with recirculation serving guest rooms. ²³ The only modeling option for heat pump water heating is individual water heaters at each guest room even though this is a very uncommon configuration. TRC modeled individual heat pump water heaters but as a proxy for central heat pump water heating performance, but integrated costs associated with tank and controls for central heat pump water heating into cost effectiveness calculations.
- Assuming central heat pump water heating also enabled the inclusion of a solar hot water thermal collection system, which was a key efficiency measure to achieving compliance in nearly all climate zones.

Figure 31 through Figure 37 contain the cost-effectiveness findings for the Small Hotel packages. Notable findings for each package include:

♦ 1A – Mixed-Fuel + EE:

- Packages achieve +3 to +10% compliance margins depending on climate zone.
- Packages are cost effective using either the On-Bill or TDV approach in all CZs except 12 (using SMUD rates), 14 (using SCE rates), and 15 (with SCE rates).
- The hotel is primarily guest rooms with a smaller proportion of nonresidential space. Thus, the inexpensive VAV minimum flow measure and lighting measures that have been applied to the entirety of the Medium Office and Medium Retail prototypes have a relatively small impact in the Small Hotel.²⁴
- ♦ 1B Mixed-Fuel + EE + PV + B: Packages are cost effective using either the On-Bill or TDV approach in all CZs. Solar PV generally increases cost effectiveness compared to efficiency-only, particularly when using an NPV metric.
- 1C Mixed-Fuel + HE: Packages achieve +2 to +5% compliance margins depending on climate zone. The package is cost effective using the On-Bill approach in a minority of climate zones, and cost effective using TDV approach only in CZ15.

²⁴ Title 24 requires that hotel/motel guest room lighting design comply with the residential lighting standards, which are all mandatory and are not awarded compliance credit for improved efficacy.



41

²³ The IOUs and CEC are actively working on including central heat pump water heater modeling with recirculation systems in early 2020.

2 – All-Electric Federal Code-Minimum Reference:

- This all-electric design does not comply with the Energy Commission's TDV performance budget. Packages achieve between -50% and -4% compliance margins depending on climate zone. This may be because the modeled HW system is constrained to having an artificially low efficiency to avoid triggering federal pre-emption, and the heat pump space heating systems must operate overnight when operation is less efficient.
- ♦ All packages are cost effective in all climate zones.
- **3A** All-Electric + EE: Packages achieve positive compliance margins in all CZs ranging from 0% to +17%, except CZ16 which had a -18% compliance margin. All packages are cost effective in all climate zones. The improved degree of cost effectiveness outcomes in Package 3A compared to Package 1A appear to be due to the significant incremental package cost savings.
- 3B All-Electric + EE + PV + B: All packages are cost effective. Packages improve in B/C ratio when compared to 3A and increase in magnitude of overall NPV savings. PV appears to be more cost-effective with higher building electricity loads.
- ♦ 3C All-Electric + HE:
 - Packages do not comply with Title 24 in all CZs except CZ15 which resulted in a +0.04% compliance margin.
 - All packages are cost effective.



Figure 31. Cost Effectiveness for Small Hotel Package 1A - Mixed-Fuel + EE

	T ::	Elec		GHG	Comp-	Sman moter	Lifecycle	,	B/C	B/C	1	T .
		Savings	Gas Savings	Reductions	liance	Incremental	Utility Cost	STDV	Ratio	Ratio	NPV (On-	NPV
cz	Utility	(kWh)	(therms)	(mtons)	Margin	Package Cost	Savings	Savings	(On-bill)	(TDV)	bili)	(TDV)
		Fuel + EE		Fred M. Edina Land					Intermediate	NAME OF THE OWNER.		
CZ01	PG&E	3,855	1288	5.65	9%	\$20,971	\$34,339	\$36,874	1.6	1.8	\$13,368	\$15,903
CZ02	PG&E	3,802	976	3.91	7%	\$20,971	\$26,312	\$29,353	1.3	1.4	\$5,341	\$8,381
CZ03	PG&E	4,153	1046	4.48	10%	\$20,971	\$31,172	\$35,915	1.5	1.7	\$10,201	\$14,944
CZ04	PG&E	5,007	395	0.85	6%	\$21,824	\$24,449	\$24,270	1.1	1.1	\$2.625	\$2,446
CZ04-2	CPAU	4,916	422	0.98	6%	\$21,824	\$18,713	\$24,306	0.9	1.1	(\$3,111)	\$2,483
CZ05	PG&E	3,530	1018	4.13	9%	\$20,971	\$28,782	\$34,448	1.4	1.6	\$7,810	\$13,477
CZ05-2.	SCG	3,530	1018	4.13	9%	\$20,971	\$23,028	\$34,448	1.1	1.6	\$2,057	\$13,477
CZ06	SCE	5,137	418	1.16	8%	\$21,824	\$16,001	\$26,934	0.7	1.2	(\$5,823)	\$5,110
CZ06-2	LADWP	5,137	418	1.16	8%	\$21,824	\$11,706	\$26,934	0.5	1.2	(\$10,118)	\$5,110
CZ07	SDG&E	5,352	424	1.31	. 8%	\$21,824	\$26,699	\$27,975	1.2	1.3	\$4,876	\$6,152
CZÓ8	SCE	5,151	419	1.21	7%	\$21,824	\$15,931	\$23,576	0.7	1.1	(\$5,893)	\$1,752
CZ08-2	LADWP	5,151	419	1.21	7%	\$21,824	\$11,643	\$23,576	0.5	1.1	(\$10,180)	\$1,752
CZ09 ·	SCE	5,229	406	1.16	6%	\$21,824	\$15,837	\$22,365	0.7	1.0	(\$5,987)	\$541
CZ09-2	LADWP .	5,229	. 406	1.16	6%	\$21,824	\$11,632	\$22,365	0.5	1.0	(\$10,192)	\$541.
CZ10	SDG&E	4,607	342	0.92	5%	\$21,824	\$25,506	\$22,219	1.2	1.0	\$3,683	\$396
CZ10-2	SCE	4,607	342	0.92	5%	\$21,824	\$13,868	\$22,219	0.6	1.0	(\$7,956)	\$396
CZ11	PG&E	4,801	325	0.87	-4%	\$21,824	\$22,936	\$19,503	1.1	0.9	\$1,112	(\$2,321)
CZ12	PG&E	5,276	327	0.90	.5%	\$21,824	\$22,356	\$21,305	1.0	0.98	\$532	(\$519)
CZ12-2	SMUD	5,276	327	0.90	5%	\$21,824	\$15,106	\$21,305	0.7	0.98	(\$6,717)	(\$519)
CZ13	PG&E	4,975	310	0.87	4%	\$21,824	\$23,594	\$19,378	1.1	0,9	\$1,770	(\$2,445)
CZ14	SDG&E	4,884	, 370	0.82	4%	\$21,824	\$24,894	\$21,035	1.1	- 0.96	\$3,070	(\$789)
CZ14-2	SCE	4,884	370	0.82	4%	\$21,824	\$14,351	\$21,035	0.7	0.96	(\$7,473)	(\$789)
CZ15	SCE	5,187	278	1.23	3%	\$21,824	\$13,645	\$18,089	0.6	0.8	(\$8,178)	(\$3,735)
CZ16	PG&E	2,992	1197	4.95	6%	\$20,971	\$27,813	\$30,869	1.3	1.5	\$6,842	\$9,898
CZ16-2	LADWP	2,992	1197	4.95	6%	\$20,971	\$19,782	\$30,869	-0.9	1.5	(\$1,190)	\$9,898

Figure 32, Cost Effectiveness for Small Hotel Package 1B - Mixed-Fuel + EE + PV + B

		Elec Savings	Gas Savings	GHG Reductions	Comp-	Incremental	Lifecycle Utility Cost	\$TDV	B/C Ratio	B/C Ratio	NPV (On-	NPV
CZ	Utility	(kWh)	(therms)	(mtons)	Margin	Package Cost	Savings	Savings	(On-bill)	(TDV)	bill)	(TDV)
Package	1B: Mixed	Fuel + EE + P	V + B									
CZ01	PG&E	107,694	1288	28.73	9%	\$228,341	\$366,509	\$295,731	1.6	1.3	\$138,168	\$67,390
CZ02	PG&E	130,144	976	31.14	7%	\$228,341	\$359,248	\$336,575	1.6	1.5	\$130,907	\$108,233
CZ03	PG&E	129,107	1046	31.57	10%≅	\$228,341	\$430,737	\$335,758	1.9	1.5	\$202,396	\$107,416
CZ04	PG&E	132,648	395	28.46	5%	\$229,194	\$355,406	\$338,455	1.6	1.5	\$126,212	\$109,262
CZ04-2	CPAU	132,556	422	28.59	6%	\$229,194	\$322,698	\$338,492	1.4	1.5	\$93,504	\$109,298
CZ05	PG&E	136,318	1018	32.73	9%	\$228,341	\$452,611	\$352,342	2.0	1.5	\$224,269	\$124,001
CZ05-2	SCG	136,318	1018	32.73	9%	\$228,341	\$446,858	\$352,342	2.0	1.5	\$218,516	\$124,001
CZ06	SCE	131,051	418	28.47	8%	\$229,194	\$217,728	\$336,843	0.9	1.5	(\$11,466)	\$107,649
CZ06-2	LADWP	131,051	418	28.47	8%	\$229,194	\$131,052	\$336,843	0.6	1.5	(\$98,142)	\$107,649
CZ07	SDG&E	136,359	424	.29.63	-8%	\$229,194	\$306,088	\$345,378	1.3	1.5	\$76,894	\$116,184
CZ08	SCE	132,539	419	28.85	7%	\$229,194	\$227,297	\$353,013	1.0	1.5	(\$1,897)	\$123,819
CZ08-2	LADWP	132,539	419	28.85	7%	\$229,194	\$134,739	\$353,013	0.6	1.5	(\$94,455)	\$123,819
CZ09	SCE	131,422	406	28.82	6%	\$229,194	\$230,791	\$343,665	1.0	1.5	\$1,597	The same of the sa
CZ09-2	LADWP	131,422	406	28.82	6%	\$229,194	\$136,024	\$343,665	0.6	1.5	(\$93,170)	\$114,471
CZ10	SDG&E	134,146	342	29.05	- 5%.	\$229,194	\$339,612	\$342,574	1.5	1.5	\$110,418	\$113,380
CZ10-2	SCE	134,146	342	29.05	///5%	\$229,194	\$225,244	\$342,574	1.0	1.5	(\$2,949)	\$113,380
CZ11	PG&E	128,916	325	27.62	4%	\$229,194	\$352,831	\$337,208	1.5	1.5	\$123,637	\$108,014
CZ12.	PG&E	131,226	327	28.04		\$229,194	\$425,029	\$338,026	1,9	1.5	\$195,835	\$108,832
CZ12-2	SMUD	131,226	327	28.04	∭- 5%⊹	\$229,194	\$213,176	\$338,026	0.9	<u>. </u>	(\$16,018)	\$108,832
CZ13	PG&E	127,258	310	27.33	4%:	\$229,194	\$351,244	\$324,217	1.5	1,4	\$122,050	\$95,023
CZ14	SDG&E	147,017	370	30.96	4%	\$229,194	\$861,445	\$217,675	2.3.8	0.9	\$632,251	(\$11,518)
CZ14-2	SCE	147,017	370	30.96	4%.	\$229,194	\$244,100	\$381,164	1,1	1,7	*=(\$14 <u>)</u> 906	\$151,970
CZ15	SCE	137,180	278	29.12	- 3%	\$229,194	\$225,054	\$348,320	1.0	1.5	(\$4,140)	\$119,127
CZ16	PG&E	141,478	1197	34.60		\$228,341	\$377,465	\$357,241	1.7	1.6	##\$149;124*	\$128,899
CZ16-2	LADWP	141,478	1197	34.60	6%	\$228,341	\$136,563	\$357,241	0.6	1.6	(\$91,778)	\$128,899

Figure 33. Cost Effectiveness for Small Hotel Package 1C - Mixed-Fuel + HE

			riguie 55.			r Sman Hotel	,	J- MALACI				T
	,	Elec		GHG	Comp-		Lifecycle		B/C	B/C		1
·		Savings	Gas Savings	Reductions	liance	Incremental	Utility Cost	\$TDV	Ratio	Ratio	NPV (On-	NPV
CZ	Utility	(kWh)	(therms)	(mtons)	Margin	Package Cost	Savings	Savings	(On-bill)	(TDV)	bill)	(TDV)
Package	1C: Mixed	Fuel + HE		84.5°,000,000,000	State Chille		i valente i glagitud					District.
CZ01	PG&E	. 10	632	3.76	2%	\$22,839	\$11,015	\$10,218	0.5	0.4	(\$11,823)	(\$12,621)
CZ02	PG&E	981	402	2.69	3%	\$23,092	\$16,255	\$11,808	0.7	0.5	(\$6,837)	(\$11,284)
CZ03	PG&E	81	383	2,30	2%	\$20,510	\$7,066	\$6,850	0.3	0.3	(\$13,444)	(\$13,660)
CZ04	PG&E	161	373	2.26	2%	\$22,164	\$8,593	\$7,645	0.4	0.3	(\$13,571)	(\$14,519)
CZ04-2	CPAU	161	373	2.26	2%	\$22,164	\$7,097	\$7,645	0.3	0.3	(\$15,067)	(\$14,519)
CZ05	PG&E	154	361	2.19	2%	\$21,418	\$6,897	\$6,585	0.3	0.3	(\$14,521)	(\$14,833)
CZ05-2	SCG	154	361	2.19	2%	\$21,418	\$4,786	\$6,585	0.2	0.3	(\$16,632)	(\$14,833)
CZ06	SCE	237	201	1.27	2%	\$20,941	\$3,789	\$4,882	0.2	0.2	(\$17,152)	(\$16,059)
CZ06-2	LADWP	237	201	1.27	2%	\$20,941	\$3,219	\$4,882	0.2	0.2	(\$17,722)	(\$16,059)
CZ07	SDG&E	1,117	158	1.28	2%	\$19,625	\$13,771	\$7,342	0.7	0.4	(\$5,854)	(\$12,283)
CZ08	SCE	1,302	169	1.39	2%	\$20,678	\$8,378	\$8,591	0.4	0.4	(\$12,300)	(\$12,088)
CZ08-2	LADWP	1,302	169	1.39	2%	\$20,678	\$5,802	\$8,591	0.3	0:4	(\$14,877)	(\$12,088)
CZ09	SCE	1,733	178	1.56	3%	\$20,052	\$10,489	\$11,164	0.5	0.6	(\$9,563)	(\$8,888)
CZ09-2	LADWP	1,733	178	1.56	3%	\$20,052	\$7,307	\$11,164	0.4	0.5	(\$12,745)	(\$8,888)
CZ10 '	SDG&E	3,170	220	2.29	4%	\$22,682	\$35,195	\$19,149	1.6	0.8	\$12,513	(\$3,533)
CZ10-2	SCE	3,170	220	2.29	4%	\$22,682	\$16,701	\$19,149	0.7	0.8	(\$5,981)	(\$3,533)
CZ11	PG&E	3,343	323	2.96	4%	\$23,344	\$27,633	\$20,966	1.2	0.9	\$4,288	(\$2,379)
CZ12	PG&E	1,724	320	2.44	4%	\$22,302	\$11,597	\$15,592	0.5	0.7	(\$10,705)	(\$6,710)
CZ12-2	SMUD	1,724	320	2.44	4%	\$22,302	\$11,156	\$15,592	0.5	0.7	(\$11,146)	(\$6,710)
CZ13	PG&E	3,083	316	2.81	3%	\$22,882	\$23,950	\$17,068	1.0	0.7	\$1,068	(\$5,814)
CZ14	SDG&E	3,714	312	2.99	4%	\$23,299	\$35,301	\$21,155	1.5	0.9	\$12,002	(\$2,144)
CZ14-2	SCE:	3,714	312	2.99	4%	. \$23,299	\$18,460	\$21,155	0.8	0.9	(\$4;839)	(\$2,144)
CZ15	SCE	8,684	97	3.21	5%	\$20,945	\$26,738	\$31,600	1.3	1.5	\$5,792	\$10,655
CZ16 .	PG&E	836	700	4.42	3%	\$24,616	\$18,608	\$14,494	0.8	0.6	(\$6,007)	(\$10,121)
CZ16-2	LADWP.	836	700	4.42	3%	\$24,616	\$15,237	\$14,494	0.6	0.6	(\$9,378)	(\$10,121)



Figure 34. Cost Effectiveness for Small Hotel Package 2 - All-Electric Federal Code Minimum

		Figure 34	4. COSLEII	ectiveness i	or smar	Hotel Packa	ige Z - All El	lecure rec		ue mini	шиш	
CZ	Utility	Elec Savings (kWh)	Gas Savings (therms)	GHG Reductions (mtons)	Comp- liance Margin	Incremental Package Cost*	Lifecycle Utility Cost Savings	\$TDV Savings	B/C Ratio (On- bill)	B/C Ratio (TDV)	NPV (On- bill)	NPV (TDV)
Package	2: All-Elec	tric Federal C	ode Minimum				Particular and Control of the Contro					
CZ01	PG&E	-159,802	16917	53.92	-28%	(\$1,296,784)	(\$582,762)	(\$115,161)	2.2	11.3	\$714,022	\$1,181,623
:CZ02:	PG&E	739ر118-	12677	40.00	12%	(\$1,297,757)	(\$245,434)	(\$51,620)	5.3	25:1	\$1,052,322	\$1,246,137
CZ03	PG&E	-110,595	12322	40.48	-14%	(\$1,300,029)	(\$326,633)	(\$51,166)	4.0	25.4	\$973,396	\$1,248,863
CZ04	PG&E	-113,404	11927	36.59	-13%	(\$1,299,864)	(\$225;307)	(\$53,134)	5.8	24.5	\$1,074,556	\$1,246,730
CZ04-2	CPAU	-113,404	11927	36.59	-13%	(\$1,299,864)	(\$17,768)	(\$53,134)	73.2	24.5	\$1,282,096	\$1,246,730
CZ05	PG&E	-108,605	11960	38.34	-15%	(\$1,299,917)	(\$350,585)	(\$54,685)	3.7	23.8	\$949,332	\$1,245,232
CZ06	SCE	-78,293	8912	29.36	-5%	(\$1,300,058)	(\$61,534)	(\$28,043)	21.1	46.4	\$1,238,524	\$1,272,015
CZ05-2	L'A	∹≭7.8;293	8912	29.36	÷5%	(\$1,300,058)	\$43,200	(\$28,043)	>1	46.4	\$1,343,258	\$1,272,015
CZ07	SDG&E	-69,819	8188	28.04	-7%	(\$1,298,406)	(\$137,638)	(\$23,199)	9.4	56.0	\$1,160,768	\$1,275,207
CZ08	SCE	-71,914	8353	28:21	-6%	(\$1,296,376)	(\$53,524)	(\$22,820)	24.2	56.8	\$1,242,852	\$1,273,556
CZ08-2	LA	-71,914	8353	28.21	-6%	(\$1,296,376)	\$42,841	(\$22,820)	>1	56.8	\$1,339,217	\$1,273,556
CZ09·	SCE	-72,262	8402	28.38	-6%	(\$1,298,174)	(\$44,979)	(\$21,950)	71.728 . 9.,	59.1:	\$1,253,196	\$1,276,224
CZ09-2	LA	-72,262	8402	28.38	-6%	(\$1,298,174)	\$46,679	(\$21,950)	\$1°	59.1	\$1,344,853	\$1,276,224
CZ10 ·	SDG&E	-80,062	8418	26.22	-8%	(\$1,295,176)	(\$172,513)	(\$36,179)	7.5	35.8	\$1,122,663	\$1,258,997
CZ10-2	SCE	-80,062	8418	26.22	-8%	(\$1,295,176)	(\$63,974)	(\$36,179)	20.2	35.8	\$1,231,202	\$1,258,997
CZ11	PG&E	-99,484	10252	30.99	-10%	(\$1,295,985)	(\$186,037)	(\$49,387)	7.0	26.2	\$1,109,948	*\$1,246,598_
CZ12	PG&E	-99,472	10403	32.08	-10%	(\$1,297;425)	(\$340,801)	(\$45,565)	3.8	28,5	\$956,624	\$1,251,860
CZ12-2	SMUD	-99,067	10403	32.21	10%	(\$1,297,425)	\$5,794	(\$44,354)	****>1	29.3	\$1,303,219	\$1,253,071
CZ13	PG&E	-96,829	10029	30.60	-10%	(\$1,295,797)	(\$184,332)	(\$50,333)	7.0	25,7	\$1,111,465	\$1,245,464
CZ14	SDG&E	-101,398	10056	29.68	-11%	(\$1,296,156)	(\$325,928)	(\$56,578)	4.0	22.9	\$970;228	\$1,239)578
CZ14-2	SCE	-101,398	10056	29.68	-11%	(\$1,296,156)	(\$121,662)	(\$56,578)	10.7	22.9	\$1,174,494	\$1,239,578
CZ15	SCE	-49,853	5579	18,07	-4%	(\$1,294,276)	\$209	(\$21,420)	\$1	60.4	\$1,294,485	\$1,272,856
CZ16	PG&E	-216,708	17599	41.89	-50%	(\$1,300,552)	(\$645,705)	(\$239,178)	2.0	5.4	\$654,847	\$1,061,374
CZ16-2	LA .	-216,708	17599	41.89	-50%	(\$1,300,552)	\$30,974	(\$239,178)		5.4	\$1,331,526	\$1,061,374

^{*}The Incremental Package Cost is the addition of the incremental HVAC and water heating equipment costs from Figure 12, the electrical infrastructure incremental cost of \$26,800 (see section 3.3.2.1), and the natural gas infrastructure incremental cost savings of \$56,020 (see section 3.3.2.2).



Figure 35. Cost Effectiveness for Small Hotel Package 3A - All-Electric + EE

	T	Elec	I ISUIC D.	GHG	CLIV CHOSS IC	or sman nor	Lifecycle	011 1111 1	ACCEPTED 1	B/C		T
		Savings	Gas Savings	Reductions	Comp-liance	Incremental	Utility Cost	\$TDV	B/C Ratio	Ratio	NPV (On-	-
CZ	Utility	(kWh)	(therms)	(mtons)	Margin	Package Cost	Savings	Savings	(On-bill)	(TDV)	bill) ,	NPV (TDV)
Package	3A: All-Eli	ectric + EE						20 7 25 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1				
CZ01	PG&E	-113,259	16917	62.38	1.3%	(\$1,251,544)	(\$200,367)	\$5,460	6.2	>1	\$1,051,177	\$1,257,005
CZ02	PG&E	-90,033	12677	45.46	4%	(\$1,265,064)	(\$108,075).	\$15,685	11.7	>1	\$1,156,989	\$1,280,749
CZ03	PG&E	-83,892	12322	45.93	6%	(\$1,267,509)	(\$198,234)	\$20,729	6.4	>1	\$1,069,274	\$1,288,237
CZ04	PG&E	-91,197	11927	40:36	0.2%	(\$1,263,932)	(\$112,892)	\$703	. 11:2	>1	\$1,151,041	\$1,264,635
CZ04-2	CPAU.	-90,981	11927	40.42	0,2%	(\$1,263,932)	\$32,557	\$918	>1	>1	\$1,296,489	\$1,264,850
CZ05	PG&E	-82,491	11960	43.62	5%	(\$1,267,355)	(\$221,492)	\$18,488	5.7	>1	\$1,045,863	\$1,285,843
CZ06	SCE	-61,523	8912	32.45	7%	(\$1,267,916)	(\$33,475)	\$15,142	37.9	>1	\$1,234,441	\$1,283,057
CZ06-2	LADWP	-61,523	8912	32.45	7%	(\$1,267,916)	\$57, <u>2</u> 15	\$15,142	>1	>1	\$1,325,130	\$1,283,057
CZ07	SDG&E	-53,308	8188	31.22	7%	(\$1,266,354)	(\$81,338)	\$22,516	15.6	>1	\$1,185,015	\$1,288,870
CZ08	SCE	-55,452	8353	31.33	3%	(\$1,264,408)	(\$23,893)	\$9,391.	52.9	>1	\$1,240,515	\$1,273,800
CZ08-2	LADWP	-55,452	8353	31.33	3%	(\$1,264,408)	\$57,058	\$9,391	>1	· >1	\$1,321,466	\$1,273,800
CZ09	SCE	-55,887	8402	31.40	2%	(\$1,266,302)	(\$19,887)	\$9,110	63.7	- 	\$1,246,415	\$1,275,412
CZ09-2	LADWP	-55,887	8402	31.40	2%	(\$1,266,302)	\$60,441	\$9,110	>1	>1	\$1,326,743	\$1,275,412
CZ10	SDG&E	-60,239	8418	29.96	2%	(\$1,256,002)	(\$126,072)	\$7,365	10.0	>1	\$1,129,930	\$1,263,367
CZ10-2	SCE	-60,239	8418	29.96	2%	(\$1,256,002)	(\$33,061)	\$7,365	38.0	>1	\$1,222,940	\$1,263,367
CZ11	PG&E	-77,307	10252	35.12	1%	(\$1,256,149)	(\$80,187)	\$3,114	15.7	>1	\$1,175,962	\$1,259,263
CZ12	PG&E	-75,098	10403	.36.73	2%	(\$1,256,824)	(\$234,275)	\$9,048	5.4	>1	\$1,022,550	\$1,265,872
CZ12-2	SMUD	-75,098	10403	36.73	2%	(\$1,256,824)	\$54,941	\$9,048	>1	¹ 1. ≥1.	\$1,311,765	\$1,265,872
CZ13	PG&E	-75,052	10029	34.72	0.3%	(\$1,256,109)	(\$79,378)	\$1,260	15.8	>1	\$1,176,731	\$1,257,369
CZ14	SDG&E	-76,375	10056	34.28	0.1%	(\$1,255,704)	(\$170,975)	\$543	7.3	>1	\$1,084,729	\$1,256,247
CZ14-2	SČE	-76,375	10056	34.28	0.1%	(\$1,255,704)	(\$34,418)	\$543	36.5	>1"	\$1,221,286	\$1,256,247
CZ15	SCE	-33,722	5579	21.43	2%	(\$1,257,835)	\$26,030	\$12,262	>1	>1	\$1,283,864	\$1,270,097
CZ16	PG&E	-139,676	17599	55.25	-14%	(\$1,255,364)	(\$197,174)	(\$66,650)	6.4	18.8	\$1,058,190	\$1,188,714
CZ16-2.	LADWP	-139,676	17599	55.25	-14%	(\$1,255,364)	\$165,789	(\$66,650)	>1	18.8	\$1,421,153	\$1,188,714



Figure 36. Cost Effectiveness for Small Hotel Package 3B - All-Electric + EE + PV + B

CZ	Utility	Elec Savings (kWh)	Gas Savings (therms)	GHG Reductions (mtons)	Comp- liance Margin	Incremental Package Cost	Lifecycle Utility Cost Savings	\$TDV Savings	B/C Ratio (On- bill)	B/C Ratio (TDV)	NPV (On-	.NPV (TDV)
Package	3B: All-Ele	ectric + EE +	PV + B								4,944,444	
CZ01	PG&E	-8,900	16917	87.15	1%	(\$1,044,174)	\$90,964	\$324,376	>1	>1	\$1,135,139	\$1,368,551
CZ02	PG&E	36,491	12677	73.03	4%	(\$1,057,694)	\$242,514	\$313,711	>1	**************************************	\$1,300,208	\$1,371,405
CZ03	PG&E	41,239	12322	73.43	6%	(\$1,060,139)	\$155,868	\$308,385	>1	>1	\$1,216,007	\$1,368,524
CZ04	PG&E	36,628	11927	69.70		(\$1,056,562)	\$240,799	\$308,682	>1	S1:	\$1,297,361	\$1,365,244
CZ04-2	CPAU	36,844	11927	69.76	0.2%	(\$1,056,562)	\$336,813	\$418,836	:: >1·	>1	\$1,393,375	\$1,475,398
CZ05:	PG&E	36,365	11960	73.11	- 5%	(\$1,059,985)	\$119,173	\$317,952	**,/**:>1	\$1	\$1,179,158	\$1,377,937
CZ06	SCE	64,476	8912	60.47	7%.	(\$1,060,545)	\$156,327	\$311,730	>1	>1	\$1,216,872	\$1,372,275
CZ06-2	LADWP	64,476	8912	60.47	7%	(\$1,060,545)	\$180,648	\$311,730	>1	>1	\$1,241,193	\$1,372,275
CZ07	SDG&E	77,715	8188	60,45	7%-	(\$1,058,983)	\$197,711	\$330,458	>1	>1	\$1,256,694	\$1,389,441
CZ08	SCE	71,990	8353	59.49	- 3%:	(\$1,057,038)	\$165,393	\$320,814	>1	>1	\$1,222,432	\$1,377,852
CZ08-2	LADWP	71,990	8353	60.24	3%	(\$1,057,038)	\$180,367	\$443,809	÷ 1-	*!/*** >1 *	\$1,237,405	\$1,500,847
CZ09	SCE	70,465	8402	59.29	2%	(\$1,058,932)	\$175,602	\$301,459	>1	15.	\$1,234,534	\$1,360,391
CZ09-2	LADWP :	70,465	8402	59.29	2%	(\$1,058,932)	\$183,220	\$301,459	>1	>1	\$1,242,152	\$1,360,391
CZ10	SDG&E	69,581	8418	58.04	2%	(\$1,048,632)	\$161,513	\$294,530	12	>1	\$1,210,145	\$1,343,162
CZ10-2	SCE	69,581	8418	58.04	2%:	(\$1,048,632)	\$164,837	\$294,530	>1	>1	\$1,213,469	\$1,343,162
CZ11	PG&E	47,260	10252	61.57	1%	(\$1,048,779)	\$253,717	\$286,797	>1	\$1.00 \text{2} \text{3} \text{3}	\$1,302,496	\$1,335,576
CZ12	PG&E	51,115	10403	64.07	2%	(\$1,049,454)	\$104,523	\$305,446	51:	>1	\$1,153,977	\$1,354,900
CZ12-2	SMUD	51,115	10403	64.99	2% 7	(\$1,049,454)	\$253,197	\$430,977	>1	=====================================	\$1,302,651	\$1,480,431
CZ13	PG&E	47,757	10029	60.77	0.3%	(\$1,048,739)	\$251,663	\$281,877	>1	>1	\$1,300,402	\$1,330,616
CZ14	SDG&E	66,084	10056	64.54	0.1%	(\$1,048,334)	\$148,510	\$334,938	>1=====================================		\$1,196,844	\$1,383,272
CZ14-2	-SCE	66,084	10056	64.54	0.1%	(\$1,048,334)	\$185,018	\$334,938	>1	>1	\$1,233,352	\$1,383,272
CZ15	SCE	98,755	5579	49.04	- 2.1%	(\$1,050,465)	\$233,308	\$311,121	-/// >1·/	>1	\$1,283,772	\$1,361,585
CZ16	PG&E	-873	17599	84.99	-14%	(\$1,047,994)	\$191,994	\$240,724	>1	1<	\$1,239,987	\$1,288,718
CZ16-2	-LADWP	-873	17599	84.99	-14%	(\$1,047,994)	\$291,279	\$240,724	*** <u>*</u> *1	>1	\$1,339,2 7 3	\$1,288,718

Figure 37. Cost Effectiveness for Small Hotel Package 3C - All-Electric + HE

cz	Utility	Elec Savings (kWh)	Gas Savings (therms)	GHG Reductions (mtons)	Comp- liance Margin	Incremental Package Cost	Lifecycle Utility Cost Savings	\$TDV Savings	B/C Ratio (On- bill)	B/C Ratio (TDV)	NPV (On-	NPV (TDV)
Package	3C: All-Ele	ctric + HE		SANGE ALEXA (AL	y viste							
CZ01	PG&E	-154,840	16917	56.24	-24%	(\$1,281,338)	(\$606,619)	(\$101,272)	2.1	12.7	\$674,719	\$1,180,066
CZ02	PG&E	-118,284	12677	41.18	-11%	(\$1,283,243)	(\$395,641)	(\$44,505)	3.2	28.8	\$887,602	\$1,238,738
CZ03	PG&E	-113,413	12322	40.80	-14%	(\$1,288,782)	(\$522,458)	(\$51,582)	2.5	25.0	\$766,324	\$1,237,200
CZ04	PG&E	-115,928	11927	37.09	-13%	(\$1,287,878)	(\$383,177)	(\$53,285)	3.4	24.2	\$904,701	\$1,234,593
CZ04-2	CPAU	-115,928	11927	37.09	-13%	(\$1,287,878)	(\$24,170)	(\$53,285)	53.3	24.2	\$1,263,708	\$1,234,593
CZ05	PG&E	-111,075	11960	38.75	-15%	(\$1,288,242)	(\$530,740)	(\$56,124)	2.4	23.0	\$757,502	\$1,232,119
CZ06	SCE	-83,000	8912	. 29.41	-15%	(\$1,288,695)	(\$154,625)	(\$32,244)	8.3	40.0	\$1,134,069	\$1,256,451
CZ06-2	LADWP	-83,000	8912	29.41	-15%	(\$1,288,695)	(\$17,626)	(\$32,244)	73.1	40.0	\$1,271,068	\$1,256,451
CZ07	SDG&E	-73,823	8188	28.32	-7%	(\$1,285,759)	(\$268,207)	(\$24,069)	4.8	53.4	\$1,017,552	\$1,261,690
CZ08	SCE	-75,573	8353	28.56	-6%	(\$1,281,241)	(\$157,393)	(\$21,912)	8.1	58.5	\$1,123,848	\$1,259,329
CZ08-2	LADWP	-75,573	8353	28.56	-6%	(\$1,281,241)	(\$18,502)	(\$21,912)	69.2	58.5	\$1,262,739	\$1,259,329
CZ09	SCE	-74,790	8402	29.04	-4%	(\$1,285,139)	(\$138,746)	(\$16,992)	9.3	75.6	\$1,146,393	\$1,268,147
CZÓ9-2	LADWP	-74,790	8402	29.04	-4%	(\$1,285,139)	(\$6,344)	(\$16,992)	202.6	75.6	\$1,278,794	\$1,268,147
CZ10	SDG&E	-80,248	8418	27.57	-5%	(\$1,278,097)	(\$235,479)	(\$24,107)	5.4	53.0	\$1,042,617	\$1,253,990
CZ10-2	SCE	-80,248	8418	27.57	-5%	(\$1,278,097)	(\$123,371)	(\$24,107)	10.4	53.0	\$1,154,726	\$1,253,990
CZ11	PG&E	-98,041	10252	32.73	-7%	(\$1,279,528)	(\$278,242)	(\$35,158)	4.6	36.4	\$1,001,286	\$1,244,370
CZ12	PG&E	-100,080	10403	33.24	-9%	(\$1,282,834)	(\$480,347)	(\$38,715)	2.7	33.1	\$802,487	\$1,244,119
CZ12-2	SMUD	-100,080	10403	33.24	-9%	(\$1,282,834)	(\$23,362)	(\$38,715)	54.9	33.1	\$1,259,472	\$1,244,119
CZ13	PG&E	-94,607 ⁻	10029	32,47	-7%	(\$1,279,301)	(\$276,944)	\$244,552	4.6	>1	\$1,002,357	\$1,523,853
CZ14	SDG&E	-97,959	10056	31.91	-7%	(\$1,279,893)	(\$302,123)	(\$37,769)	4.2	33.9	\$977,770	\$1,242,124
CZ14-2	SCE	-97,959	10056	31.91	-7%	(\$1,279,893)	(\$129,082)	(\$37,769).	9.9	33.9	\$1,150,811	\$1,242,124
CZ15	SCE	-45,226	5579	20.17	0/04%	(\$1,276,847)	(\$6,533)	\$227	195.4	>1	\$1,270,314	\$1,277,074
CZ16	PG&E	-198,840	17599	47.73	-39%	(\$1,288,450)	(\$605,601)	(\$185,438)	2.1	6.9	\$682,848	\$1,103,011
CZ16-2	LADWP	-198,840	- 17599	47,73	-39%	(\$1,288,450)	\$40,268	(\$185,438)	>1	6.9	\$1,328,718	\$1,103,011

4.4 Cost Effectiveness Results – PV-only and PV+Battery

The Reach Code Team ran packages of PV-only and PV+Battery measures, without any additional efficiency measures, to assess cost effectiveness on top of the mixed-fuel baseline building and the all-electric federal code minimum reference (Package 2 in Sections 4.1 – 4.3).

Jurisdictions interested in adopting PV-only reach codes should reference the mixed-fuel cost effectiveness results because a mixed-fuel building is the baseline for the nonresidential prototypes analyzed in this study, PV or PV+Battery packages are added to all-electric federal code minimum reference which (in many scenarios) do not have a positive compliance margin compared to the mixed-fuel baseline model, and are solely provided for informational purposes. Jurisdictions interested in reach codes requiring all-electric+PV or all-electric+PV+battery should reference package 3B results in Sections 4.1 – 4.3.²⁵

Each of the following eight packages were evaluated against a mixed fuel baseline designed as per 2019 Title 24 Part 6 requirements.

- Mixed-Fuel + 3 kW PV Only:
- Mixed-Fuel + 3 kW PV + 5 kWh battery
- Mixed-Fuel + PV Only: PV sized per the roof size of the building, or to offset the annual electricity consumption, whichever is smaller
- Mixed-Fuel + PV + 50 kWh Battery: PV sized per the roof size of the building, or to offset the annual electricity consumption, whichever is smaller, along with 50 kWh battery
- All-Electric + 3 kW PV Only
- All-Electric + 3 kW PV + 5 kWh Battery
- All-Electric + PV Only: PV sized per the roof size of the building, or to offset the annual electricity consumption, whichever is smaller
- All-Electric + PV + 50 kWh Battery: PV sized per the roof size of the building, or to offset the annual electricity consumption, whichever is smaller, along with 50 kWh battery

Figure 38 through Figure 40 summarize the on-bill and TDV B/C ratios for each prototype for the two PV only packages and the two PV plus battery packages. Compliance margins are 0 percent for all mixed-fuel packages. For all-electric packages, compliance margins are equal to those found in Package 2 for each prototype in Sections 4.1-4.3. The compliance margins are not impacted by renewables and battery storage measures and hence not shown in the tables. These figures are formatted in the following way:

- Cells highlighted in green have a B/C ratio greater than 1 and are cost-effective. The shade of green gets darker as cost effectiveness increases.
- Cells not highlighted have a B/C ratio less than one and are not cost effective.

Because this study shows that the addition of battery generally reduces cost effectiveness, removing a battery measure would only increase cost effectiveness. Thus, a jurisdiction can apply the EE+PV+Battery cost effectiveness findings to support EE+PV reach codes, because EE+PV would still remain cost effective without a battery.



50

Please see Appendix 6.7 for results in full detail. Generally, for mixed-fuel packages across all prototypes, all climate zones were proven to have cost effective outcomes using TDV except in CZ1 with a 3 kW PV + 5 kWh Battery scenario. Most climate zones also had On-Bill cost effectiveness. The addition of a battery slightly reduces cost effectiveness.

In all-electric packages, the results for most climate zones were found cost effective using both TDV and On-Bill approaches with larger PV systems or PV+Battery systems. Most 3 kW PV systems were also found to be cost effective except in some scenarios analyzing the Medium Office using the On-Bill method. CZ16 results continue to show challenges being cost effective with all electric buildings, likely due to the high heating loads in this climate. The addition of a battery slightly reduces the cost effectiveness for all-electric buildings with PV.



Figure 38, Cost Effectiveness for Medium Office - PV and Battery

to a literatura		·	Figure 38. Cost Effectiveness for M						leulum	edium Unice - PV and Battery							
			· · · · · · · · · · · · · · · · · · ·	tara and a	Mixe	d Fuel							All-E	lectric :			
·	PV	3k	W	3k	W	135	kW	135	kW	3k	W	3k	W	135	kW	135	kW
:	Battery	-()	.5k¹	√h	-(j.	50k	Wh ·) :	5k	Wh	.()	50k	Wh
CZ	Utility	On-Bill	TDV	On-Bill	TDV	On-Bill	TDV	On-Bill	TDV	On-Bill	TDV	On-Bill	TDV	On-Bill	TDV	On-Bill	TDV
CZ01	PG&E	2.8	1.5	1.7	0.9	1.7	1.3	1,6	1.2	0.9	1.6	0.9	1.6	2.5	2.0	2.1	1.7
CZ02	PG&E	5.7	1.9	2.1	1.1	2,2	1.6	2.0	1.4	0.8	2.2	0.9	2.6	5.2	2.4	2.7	%) 2.1
CZ03	PG&E	3.7	1.8	2.2	1.0	2.1%	1.5	1.9	1.4	1.9	3.9	2,0	4.0	上海 為。"	2.5	2.9	
CZ04	PG&E	3,6	2.0	2,1	1.2	,2.3	1.6	2.1	1.5	0.9	* 2.1	1.1	2.7	9.3	2.5	2.9	2.2
CZ04-2	CPAU	2.1	2.0	1.3	1.2	1.8	1.6	1.6	1.5	77	2.1	9,8	2,7	2,9	2.5	2.5	***2.2
CZ05	PG&E	4,7	1.9	2.4	1.1	2.5%	1,6	/// 2.3	1.5	1.8	12,7	1.9	2.7.	4.0	2.7	\$74	2.3
CZ05-2	SCG	4.2	- ':1.9 °F'	2.4	1.1	2.5	1.6	2.3	1.5	1,52	> >4	>1	+≱1	>1	.9.0	94.	2.6
CZ06	SCE	2.0	- 2.0	1.2	1.1	1.3	1.6	1.2	1.5	21	7.2	>1	8,2	2.4	2,7	2.1	2.3
CZ06-2	LA	1.2	2.0	0.7	1.1	0.8	1.6	0.7	1.5		74	>1	8.2	1.5	2.7	1.3	2.3 %
CZ07	SDG&E	3.2	2.0	1.9	1.2	2.1	1.6	1,9	1.5	25	1417	2	¥1.	3.7	2.7	9,2	2.3
CZ08	SCE	1.9	2.0	1.1	1,2	1.3	1.7	1.2	1.5	\$1	A A	51	احوا	2.2	27.6	1.9	2.4
CZ08-2	LA	1.2	2.0	0.7	1.2	0.7	1.7	0.7	1.5	1.24	51	2/4	51	1.3	2,743	1:1	2.4
CZ09	SCE	1.9	2.0	1.1	1.2	1.3	= 1.7 =	1.2	1.5	>1	51	4.7	51.	2.2	2.6	1.9	2.3
CZ09-2	LA	1.1	2.0	0.7	1.2	0.7	1.7	0.7	1.5	91	S1 .	>1	>1	1.3	2.6	1.2	2.3
CZ10.	SDG&E	5.8	1.9	2.2	1.1	2.1	1.6	1.9	1.5	>1	13.3	521	6.9	3.3	2.3	2.9	ii 2.0 ii
CZ10-2	SCE	2.1	1.9	1.2	1.1	1.3	1.6	1.2	1.5	751	3.81	5 1	6.35	2.0	2.3	1.8	2.0
CZ11	PG&E	8.6	1.9	2:1	1.1	2.2	1.6	2.0	1.5	1.1	2.6	1.5	8(6	3.2	2,4	2.8	2.1
CZ12	PG&E	8.5	1.9	2.1	1.1	2.2	1.6	2.0	1.5	0.9	2.5	1.2	3.2	10.2	2.4	2.7	2.1
CZ12-2	SMUD	1.4	1.9	0.8	1.1	1.1	1,6	1.04	1.5	- SL	2.5	>1	3,2	1.9	2.4		2.1
CZ13	PG&E	8,5	= 1.8	2.0	1.1	2.2	1.5	2.0	1.4	1.1	12.5	1.5	5,6	5.5	2.3	2.7	2.0
CZ14	SDG&E	341	2.3	2.0	1.3	2:2	1.9	2.0	1.7	21	1,2.3 / kh	51 S1 S	3.1	3,6	2,8	5/2	1//2.5///
CZ14=2	SCE	1.9	2;3	1.1	1.3	1.3	1,9	1,2	1.7	>1	1. 2.3	ÞΩ	3.1	2.2	2.8	1.9	2.5
CZ15	SCE	- 1.8	2.1	1.1	1.2	1.2	1.7	1.1.	1.6	-31	7.5	>1	>5,	1.8	2.4	1.6	2.1
CZ16	PG&E	3.9	-2.0	© 2.3⊜	1,1	2.3	1.6	2.1	- (1.5	0.3	0.4	0:4	0.6	2.5	1.8	2.2	1.6
CZ16-2	LA:	1.2	2:0	0.7	1.1	0.7	1,6	0.7	1.5	>1	0.4	>1.	0.6	1.3	1.8	1.2	1.6
		·			X					· · · · · · · · · · · · · · · · · · ·		***************************************		· · · · · · · · · · · · · · · · · · ·			. 20

Figure 39. Cost Effectiveness for Medium Retail - PV and Battery

	1	T:		115urc		d Fuel	TV CITCO	3 101 1/10	CIAILLIII	Ketan	I v uno	Dutter,	<u> </u>	lectric			
	PV	3k	٠\٨/	3k		·	kW .	90	kW	3k	١٨/	3k		90	k\\/	90	kW
	Battery)	5k\		 	0		Wh	- C		5k\)	·	Wh
cz	Utility	On-Bill	TDV	On-Bill	TDV	On-Bill	TDV	On-Bill	TDV	On-Bill	. TDV	On-Bill	TDV	On-Bill	TDV	On-Bill	TDV
CZ01	PG&E	2.3	1.5	1.3	0.9	1.8	1.3	1.6	1.2	31	5,.0	>1	2.7	2.5	1.6	2.2	1.5
CZ02	PG&E	. 3.2	1.8	1.9	1.1	1.9	1.5	1.8	1.5	>2	16,4	>1	51	27	2.1	2,3	1.9
CZ03	PG&E	2.7	1.8	1.6	1.1	· 2.2 ·	1.5	2.0	1.4	>1:	().92	>1	71	8,0	2.1	2.6	1.9
CZ04	PG&E	3.3	1.9	1.9	1111	2.0	1.6	1.9	1.5	>1,	2.2	<u>/</u>	1.21	. 2,7	2.1	2.5	2.0
CZ04-2	CPAU	2.1	1.9	1.2	1.1	1.7	1.6	1.5	1.5	>1	1.42	1152		2,4	2.1	2.1	2.0
CZ05	PG&E	2.8	1.9	1.6	1.1	2.3	1.6	2.0	1.5	>1	51	21	5 <u>1</u> -	372	2.1	2.7	2.0
CZ05-2	SCG	2.8	1.9	1.6	1.1	2.3	1.6	2.0	1.5	21	24	λ <u>1</u> .	>1	3.7.	1.9	3.2	1.6
CZ06	SCE	2:0	1.9	1.2	1.1	1.2	1.6	1.1	1.5	Sit	>1.1	724	21	1.7	- 2.2	1.5	2.0
CZ06-2	LA	1.3	1.9	0.7	1.1_	0.7	1.6	0.6	- 1.5	- 1<	>1	>1	ÞÍ	1.01	2.2	0.9	2.0
CZ07	SDG&E	Ą.D	2.0	2.4	1.2	1.5	1.6	1.6	1.6	>2	124	24	>1	2.4	2.3	- 2.3	2.1
CZ08	SCE	2.1	1/2:0	. 1.2	1.2	1.2	1.7	1.1	1.6	32	>1	>1	>2	1.7	2.4	1.5	7.1
CZ08-2	LA	1.3	2.0	0.8	1.2	0.7	1.7	0.6	1.6	21	<u>^1</u>	25	21:	1.01	2.4	0.9	2.1
CZ09	SCE	2.0	2.0	1.2	1.2	1.2	1.7	1.1	1.5	>1	151	\$15.1	>1	1.8	2.4	1.6	2.1
CZ09-2	LA	1.2	2.0	0.7	1.2	0.7	1.7	0.7	1.5	>4	31 <u>.</u>	24	24	1.1	2.4	0.99	2.1
CZ10	SDG&E	3.8	2.0	2.2	1.2	1.7	1.6	1.7	1.5	ΣŽζ	>1	У1 I	21	2.6	,2.3	2.5	2.0
CZ10-2	SCE	2.0	2.0	1.2	1.2	1.2	1.6	1.1	1.5	>2	>2	>1	>1	- 1.8	2.3	1.6	2.0
CZ11	PG&E	2.8	1.9	1.6	1.1	1.9	1.6	1.8	1.5	20	>1	- 91	>1	2.7	2.3	- 2.5	2,1
CZ12	PG&E	3.0	1.9	1.7	1.1	1.9	1.6	1.8	1.5	>1	- <u>2</u> 2	>1	>1	2.7	2:3	2.5	2.1
CZ12-2	SMUD	1.5	1.9	0.9	1.1	1.1	1.6	0.997	1.5	22	>1	>4	>11	1.7	2.3	1.4	2.1
CZ13	PG&E	3.0	1.9	1.7	1.1	1.9	1.6	1.8	1.4	>1	>1	>1	>1	2.7	2.2	2.4	1.9
CZ14	SDG&E	3.5	2.2	2.1	1.3	1.6	1.8	1.5	1.6	Ϋ́	>1	: 31	>1	2.5	2.6	2.2	2.2
CZ14-2	SCE	1.8	2.2	1.1	1.3	1.2	1.8	1.1	1.6	21	741	>1	>1	1.7	2.6	1.5	2.2
CZ15	SCE	1.9	2.0	1.1	1.2	1.1	1.7	1.02	1.5	>1	>1	>1	i >11	1.7	2.4	1.5	2.1
CZ16	PG&E	3.7	2.0	2.1	1.2	2.1	1.7	1.9	1.6	0,6	0,5	0.5	0.4	2.7	2.0	2.3	1.8
CZ16-2	LA	1.3	2.0	0.7	1.2	0.7	1.7	0.6	1.6	21.	0.5	>1	0.4	1.2	2:0	1.0	1.8

Figure 40. Cost Effectiveness for Small Hotel - PV and Battery

			. ~	rigui			cuvent	522 101	oman n	oter - Pv	anu.ba	LLET y:					
1		-	• .		Mixe	ed Fuel							All-Elec	ctric			
	PV.	Зk	:W	3k1	N	80k	W	80	kW	3k	W	3k	W	80k	W	80k	W
	Battery	1 1	oʻ <u>.</u>	5kV	Vh .	0		50	kWh.)	5k\	Wh:	0	5	50k	Wh
CZ	Utility	On-Bill	TDV	On-Bill	TDV	On-Bill	TDV	On-Bill	TDV	On-Bill	TDV	On-Bill	TDV	On-Bill	TDV	On-Bill	TDV
CZ01.	PG&E	2.3	1.5	1.3	0.9	1.9	1.2	1.6	1.1	2.31	>0	2.3	. 181	4.8	54	4.7	14
CZ02	PG&E	2.3	. 1.9	1.3	1.1	1,8	1.5	1.6	1.4	5.6	541	5/6	121	3.510)4 F	21	1/2
CZ03	PG&E	2.7	1.8	1:6	1.05	2.3	1.5	1.9	1.4	4.2	ÞΪ	142	31	[151a]	(1) (1)	14 A 1	142
CZ04	PG&E	2.4	1.9	14	1.1	1.8	1.6	1,6	1.5	5.2	· >1	5.2	>1	1 21	5.51	42	11 -17
CZ04-2	CPAU.	2.1	1.9	1.2	1.1	/ 1.7	1,6	1.5	1.5	1/2-1	21	21	51	\$1.7	51	24	>0
CZ05	PG&E	2,5	1.9	1,7	1,1	2:4	1.6	2.0	1.5	8.9	21	6	>4	>1	>1/1	(A)	. >1
CZ05-2	SCG	29	1.9	1.7	1.1	7 2.4	1.6	∴2.0	1.5	24	2/2	22	λ 2	>1	>1	À	aQ.
CZ06	SCE	1.8	1.9	1.1	1.1	% 1.1	1.6	0.9	1.4	>1	>1	2.1	F. 91.	7<	>2		51.5
CZ06-2	LA	1.1	1.9:	0.7	1.1	0.7	1.6	0.6	1.4	L >İ	20.8	>1.	142	24	>0) sa	>1
CZ07	SDG&E	2.6	2.0	1.5	1.1	1.4	1.6	1.3	1.5	>1	24	21	şΩ	>1	>1:1	1	152
CZ08	SCE	1.9	2.0	1.1	1.2	1.2	1.7	1.0	1.5	>Ē	>12	21	- 91ee	90	1.21		>1
CZ08-2	LA	1.2	2.0	0.7	1.2	0.7	1.7	0.6	1.5	222	9 (> 1 <u>-</u> 1)	20.11	20	200	(1) \$11 <u>1</u> 11	- ×I	[] [[A]] []
CZ09	SCE	1.9	1.9	1.1	1.1	1.2	1.6	0.997	1.4		(\$1)	_ >(1. AL	74	* 5 <u>1</u>	>i l	×1
CZ09-2	LA	1.1	1.9	0.7	1.1	0.7	1.6	0.6	1.4	>1) ¥1	***> <u>1</u>	#1.	- AI	>100	51	11
CZ10 .	SDG&E _	2.9	1.9	17.7	1.1	1.5	1.6	1.4	1.4	8.2	21	8.2	15 <u>1</u>	F 61.	\$ 11:	7.52	NAC.
CZ10-2	SCE	1.7	1.9	0.99	1.1	1.2	1.6	0.99	1.4	>0	321	91	>1	24	120	517) și
CZ11	PG&E	2.6	1.9	1.5	1.1	1.8	1.6	1.5	1.4	7.6	21	7,6	<u> >1</u>	>1	37.51	βŢ	>1
CZ12	PG&E	2.7	1.9	1.6	1.1	2.3	1.6	1.9	1.4	4 Ü	>1	AJO 1	91	(A) (\$1.11)	H >1	5 (61)	\$ 28.0
CZ12-2	SMŲD	1.4	1.9	0.8	1,1	1.1	1.6	0.95	1.4	>1	>1	>1	50 PAT 15	161	>1	> \$1	512
CZ13 .	PG&E	2.6	-:1.8	1.5	1.1	1.8	1.5	1.5	1.4	7,7	>1	7.7	>1	22.0		- \$1	191
CZ14	SDG&E	3.0	2.2	1.7	1.3	1.7	1.8	1.5	1.6	4.2	>1	4.2	24	×2.	>0	120	1910
CZ14-2	SCE	1.8	2.2	1.1	1.3	1.3	1.8	1.1	1.6	21 1	192	>1	- , >1,	130	>±.	152	241 <u> </u>
CZ15		≟1.7	2.0	1.002	1.2	1.2	1.7	1.003	1,4	- ×1.	14 (44)	51 J	21	5151	34	31.51	120.14
CZ16	PG&E	2.7	€2.0	1.6	1.2	1.9	1.6	1.7	1.5	2.1	5.7	2.1	5.6	5.8	>1/2/	5.8	1,51
CZ16-2	LA	1.02	2.0	0.6	1.2	0.6	1.6	0,6	1.5	\$ <u></u>	5.7	>1	5:6	122	>1	>1	>1

5 Summary, Conclusions, and Further Considerations

The Reach Codes Team developed packages of energy efficiency measures as well as packages combining energy efficiency with PV generation and battery storage systems, simulated them in building modeling software, and gathered costs to determine the cost effectiveness of multiple scenarios. The Reach Codes team coordinated assumptions with multiple utilities, cities, and building community experts to develop a set of assumptions considered reasonable in the current market. Changing assumptions, such as the period of analysis, measure selection, cost assumptions, energy escalation rates, or utility tariffs are likely to change results.

5.1 Summary

Figure 41 through Figure 43 summarize results for each prototype and depict the compliance margins achieved for each climate zone and package. Because local reach codes must both exceed the Energy Commission performance budget (i.e., have a positive compliance margin) and be cost-effective, the Reach Code Team highlighted cells meeting these two requirements to help clarify the upper boundary for potential reach code policies:

- Cells highlighted in green depict a positive compliance margin and cost-effective results using both On-Bill and TDV approaches.
- Cells highlighted in yellow depict a positive compliance and cost-effective results using either the On-Bill or TDV approach.
- Cells not highlighted either depict a negative compliance margin or a package that was not cost effective using <u>either</u> the On-Bill or TDV approach.

For more detail on the results in the Figures, please refer to Section 4 Results. As described in Section 4.4, PV-only and PV+Battery packages in the mixed-fuel building were found to be cost effective across all prototypes, climate zones, and packages using the TDV approach, and results are not reiterated in the following figures.



Figure 41. Medium Office Summary of Compliance Margin and Cost Effectiveness

cz	r. Medium On		Mixed Fuel		, ,	All Ele		
CZ	Utility	EE	EE + PV + B	HE	Fed Code	EE	EE + PV + B	HE
CZ01	PG&E:	18%	18%	3%	-15%	7%	7%	-14%
CZ02	PG&E	1.7%	17%	4%	-7%	10%	10%	-5%
CZ03	PG&E	20%	20%	3%	-7%	16%	16%	-6%
CZ04	PG&E	14%	14%	5%	-6%	9%	9%	-3%
CZ04-2	CPAU	14%	14%	5%	-6%	9%	9%	-3%
CZ05	PG&E	18%	.18%	4%	-8%	12%	12%	-6%
CZ05-2	SCG	18%	18%	4%	NA	NA	NA	NĀ
CZ06	SCE	20%	20%	3%	-4%	18%	18%	2%
CZ06-2 ::	LADWP	20%	20%	3%	-4%	18%	18%	-2%
CZ07	SDG&E	20%	20%	4%	-2%	20%	20%	1%
CZ08	SCE	18%	18%	4%	-2%	18%	18%	1%
CZ08-2	LADWP	18%	18%	4%	-2%	18%	18%	1% -
CZ09	SCE	16%	16%	4%	-2%	-15%	15%	2%
CZ09-2	LADWP	16%	16%	4%	-2%	15%	15%	2%
CZ10	SDG&E	17%	17%	4%	-4%	- 13%	13%	-1%
CZ10-2	SCE	17%	1/%	4%	-4%	13%	13%	-1%
CZ11	PG&E	13%	13%	5%	-4%	10%	10%	0%
CZ12	PG&E	14%	14%	5%	-5%	10%	10%	-1%
CZ12-2	SMUD	14%	14%	5%	-5%	10%	10%	-1%
CZ13	PG&E	13%	13%	5%	-4%	9%	9%	0%
CZ14	SDG&E	14%	14%	5%	-5%	9%	9%	-1%
CZ14-2	SCE	14%	14%	5%	-5%	9%	. 9%	-1%
CZ15	SCE	12%	12%	5%	-2%	10%	10%	3%
CZ16	PG&E	14%	14%	5%	-27%	-15%	-15%	-26%
CZ16-2	LADWP	14%	14%	5%	-27%	-15%	-15%	-26%



Figure 42. Medium Retail Summary of Compliance Margin and Cost Effectiveness

CZ	Z. Piculum Ke	I	Mixed Fuel				lectric	* :
CZ:	Utility	EE	EE + PV + B	HE .	Fed Code	EE	EE + PV + B	HE
CZ01	PG&E	18%	18%	2%	-4.1%	15%	15%	-2%
CZ02	PG&E	13%	13%	3%	-1.0%	13%	13%	3%
CZ03	PG&E	16%	16%	2%	-0.4%	16%	16%	2%
CZ04	PG&E	14%	14%	3%	-0.1%	14%	14%	3%
CZ04-2	CPAU	14%.	14%	3%	-0.1%	14%	14%	3%
CZ05	PG&E	16%	16%	. 1%	-1.2%	15%	15%	1%
CZ05-2	SCG	16%	16%	1%	NA .	NA -	- NA	NA .
CZ06	SCE	10%	10%	-3%	0.5%	11%	11%	3%
CZ06-2	LADWP	10%	10%	3%	0.5%	- 14%	11%	3%;
CZ07	SDG&E	13%	13%	- 2%	0.3%	13%	13%	3%
CZ08	SCE	10%	10%	3%	0.4%	10%	10%	- 4%
CZ08-2	LADWP	1:0%	10%	3%	0,4%	10%	10%	4%
CZ09	SCE	10%	10%	- 4%	0.4%	10%	10%	4%
CZ09-2	LADWP	10%	10%	4%	0.4%	10%	10%	4%
CZ10	SDG&E	12%	12%	4%	0.1%	12%	12%.	4%
CZ10-2	SCE	12%	12%	4%	0.1%	12%.	12%	4%
CZ11	PG&E	13%	13%	4%	0.5%	12%	12%	5%
CZ12	PG&E	13%	13%	4%	-0.1%	12%	12%	4%
CZ12-2	SMUD	13%	13%	4%	-0.1%	12%	12%	4%
CZ13	PG&E	15%	15%	4%	-0.4%	14%	14%	4%
CZ14	SDG&E	13%	13%	4%	0.7%	15%	15%	- 5% -
. CZ14-2	SCE	13%	13%	4%	0.7%	15%	15%	5%
CZ15	SCE	12%	12%	5%	0.9%	12%	12%	. 6%
CZ16	PG&E	13%	13%	3%	-12.2%	3%	3%	-8%
CZ16-2	LADWP	13%	13%	3%	-12.2%	3%	3%	-8%

Figure 43. Small Hotel Summary of Compliance Margin and Cost Effectiveness

reni	t teilfei -		Mixed Fuel		1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	All E	lectric	
CZ	Utility	EE	EE+PV+B	HE	Fed Code	EE	EE + PV + B	HE
. CZ01	PG&E	9%	. 9%	2%	-28%	1%	1%	-24%
CZ02	PG&E	7%	7%	3%	-12%	4%	4%	-11%
CZ03	PG&E	10%	10%	2%	-14%	6%	:6%	-14%
CZ04	PG&E	6%	6%	2%	-13%	0.2%	0.2%	-13%
CZ04-2	ĊPAÜ	6%	6%	2%	-13%	0.2%	0.2%	-13%
CZ05	PG&E	9%	- 9%	2%	-15%	5%	5%	-15%
CZ05-2	SCG:	9%	9%	2%	NA	NΆ	- NA	NA
CZ06	SCE	- 8%	8%	- 2%	-5%	7%.	1%	-15%
CZ06-2	LADWP	2 8%	8%	2%	-5%	7%	7%	-15%
CZ07	SDG&E	- 8%	8%	2%	-7%	7%	. 7%	-7%
.CZ08	SCE	7.%	7%	2%	-6%	3%	-3%	-6%
CZ08-2	LADWP	7%	7%	2%	-6%	3%	3%	-6%:
CZ09	SCE	6%	6%	3%	-6%	2%	2%	-4%
CZ09-2	LADWP	6%	6%	3%	-6%	2%	.2%	-4%
CZ10	SDG&E	5%	- 5%	4%	-8%	2%	2%	-5%
CZ10-2	SCE	5%	5%	4%	-8%	2%	2%	-5%
CZ11	PG&E	4%	4%	4%	-10%	1%	1%	-7%
CZ12	PG&E	5%	5%	4%	-10%	2%	2%	-9%
CZ12-2	SMUD	5%	5%	4%	-10%	2%	2%	-9%
CZ13	PG&E	4%	4%	∜3%≓	-10%	0.3%	0.3%	-7%
CZ14	SDG&E	1,4%	4%	4%,	-11%	- 0.1%	0.1%	-7%
CZ14-2	SCE	4%	4%	4%	-11%	0:1%	0.1%	-7%
CZ15	SCE	3%	3%	5%	-4%	2%	2%	0.04%
CZ16	PG&E	- 6%	6%	3%	-50%	-14%	-14%	-39%
CZ16-2	LADWP	6%	6%	3%	-50%	-14%	-14%	-39%

5.2 Conclusions and Further Considerations

Findings are specific to the scenarios analyzed under this specific methodology, and largely pertain to office, retail, and hotel-type occupancies. Nonresidential buildings constitute a wide variety of occupancy profiles and process loads, making findings challenging to generalize across multiple building types.

Findings indicate the following overall conclusions:

- 1. This study assumed that electrifying space heating and service water heating could eliminate natural gas infrastructure alone, because these were the only gas end-uses included the prototypes. Avoiding the installation of natural gas infrastructure results in significant cost savings and is a primary factor toward cost-effective outcomes in all-electric designs, even with necessary increases in electrical capacity.
- 2. There is ample opportunity for cost effective energy efficiency improvements, as demonstrated by the compliance margins achieved in many of the efficiency-only and efficiency + PV packages. Though much of the energy savings are attributable to lighting measures, efficiency measures selected for these prototypes are confined to the building systems that can be modeled. There is



likely further opportunity for energy savings through measures that cannot be currently demonstrated in compliance software, such as high-performance control sequences or variable speed parallel fan powered boxes.

- 3. High efficiency appliances triggering federal preemption do not achieve as high compliance margins as the other efficiency measures analyzed in this study. Cost effectiveness appears to be dependent on the system type and building type. Nonetheless, specifying high efficiency equipment will always be a key feature in integrated design.
- 4. Regarding the Small Hotel prototype:
 - a. The Small Hotel presents a challenging prototype to cost-effectively exceed the state's energy performance budget without efficiency measures. The Reach Code Team is uncertain of the precision of the results due to the inability to directly model either drain water heat recovery or a central heat pump water heater with a recirculation loop.
 - b. Hotel results may be applicable to high-rise (4 or more stories) multifamily buildings. Both hotel and multifamily buildings have the same or similar mandatory and prescriptive compliance options for hot water systems, lighting, and envelope. Furthermore, the Alternate Calculation Method Reference Manual specifies the same baseline HVAC system for both building types.
 - c. Hotel compliance margins were the lowest among the three building types analyzed, and thus the most conservative performance thresholds applicable to other nonresidential buildings not analyzed in this study. As stated previously, the varying occupancy and energy profiles of nonresidential buildings makes challenging to directly apply these results across all buildings.
- 5. Many all-electric and solar PV packages demonstrated greater GHG reductions than their mixed-fuel counterparts, contrary to TDV-based performance, suggesting a misalignment among the TDV metric and California's long-term GHG-reduction goals. The Energy Commission has indicated that they are aware of this issue and are seeking to address it.
- 6. Changes to the Nonresidential Alternative Calculation Method (ACM) Reference Manual can drastically impact results. Two examples include:
 - a. When performance modeling residential buildings, the Standard Design is electric if the Proposed Design is electric; which removes TDV-related penalties and associated negative compliance margins. This essentially allows for a compliance pathway for all-electric residential buildings. If nonresidential buildings were treated in the same way, all-electric cost effectiveness using the TDV approach would improve.
 - b. The baseline mixed-fuel system for a hotel includes a furnace in each guest room, which carries substantial plumbing costs and labor costs for assembly. A change in the baseline system would lead to different base case costs and different cost effectiveness outcomes.
- 7. All-electric federal code-minimum packages appear to be cost effective, largely due to avoided natural gas infrastructure, but in most cases do not comply with the Energy Commission's minimum performance budget (as described in item 7a above). For most cases it appears that adding cost-effective efficiency measures achieves compliance. All-electric nonresidential projects can leverage the initial cost savings of avoiding natural gas infrastructure by adding energy efficiency measures that would not be cost effective independently.




6 Appendices

6.1 Map of California Climate Zones

Climate zone geographical boundaries are depicted in Figure 44. The map in Figure 44 along with a zipcode search directory is available at:

https://ww2.energy.ca.gov/maps/renewable/building_climate_zones.html

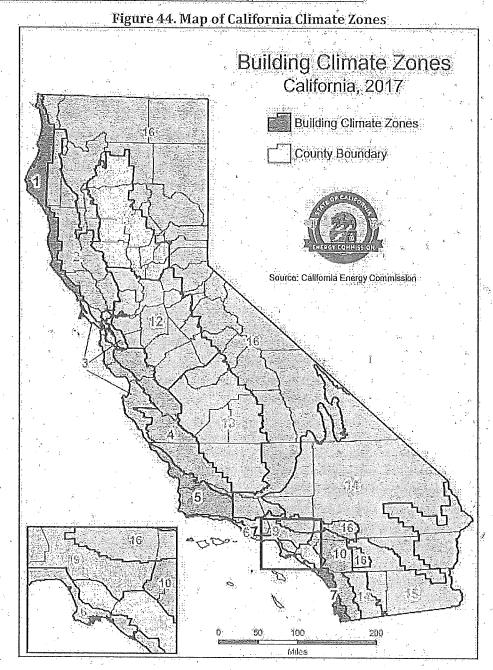

6.2 Lighting Efficiency Measures

Figure 45 details the applicability and impact of each lighting efficiency measure by prototype and space function and includes the resulting LPD that is modeled as the proposed by building type and by space function.

Figure 45. Impact of Lighting Measures on Proposed LPDs by Space Function

Figure 45. Impact of I	righting r	reasures o	n Froposeu	LEDS by	space runci	
			•	•		Modeled
	Baseline		lmp	act		Proposed
		Interior			Occupant	
<i>'</i>		Lighting		Daylight	Sensing in	
	LPD	Reduced	Institutional	Dimming	Open Office	LPD
Space Function	(W/ft2)	LPD .	Tuning	Plus OFF	Plan	(W/ft ²)
Medium Office						
Office Area (Open plan office) -					14.	
Interior	0.65	15%	10%	-	17%	0.429
Office Area (Open plan office) -						
Perimeter	0.65	15%	5%	10%	30%	0.368
Medium Retail						
Commercial/Industrial Storage						
(Warehouse)	0.45	10%	5%	÷. v. *	4 - 4 - "	0.386
Main Entry Löbby	0.85	10%	5%		-	0.729
Retail Sales Area (Retail						
Merchandise Sales)	0.95	5%	5%	·	. 	0.857
Small Hotel						
Commercial/Industrial Storage						
(Warehouse)	0.45	10%	5%	-		0.386
Convention, Conference,					1 1	
Multipurpose, and Meeting	0.85	10%	5%	, .	-	0.729
Corridor Area	0.60	10%	5%	-	, ~ ,	0.514
Exercise/Fitness Center and				***************************************		
Gymnasium Areas	0.50	10%	S. dec.	4.		0.450
Laundry Area	0.45	10%				0.405
Lounge, Breakroom, or Waiting	1		<u> </u>			
Area	0.65	10%	5%	-	<u>.</u>	0.557
Mechanical	0.40	10%			<u> </u>	0.360
Office Area (>250 ft²)	0.65	10%	.5%	-	· · · · · · · · · · · · · · · · · · ·	0.557

6.3 Drain Water Heat Recovery Measure Analysis

To support potential DWHR savings in the Small Hotel prototype, the Reach Code Team modeled the drain water heat recovery measure in CBECC-Res 2019 in the all-electric and mixed fuel 6,960 ft2 prototype residential buildings. The Reach Code Team assumed one heat recovery device for every three showers assuming unequal flow to the shower. Based on specifications from three different drain water heat recovery device manufacturers for device effectiveness in hotel applications, the team assumed a heat recovery efficiency of 50 percent.

The Reach Code Team modeled mixed fuel and all-electric residential prototype buildings both with and without heat recovery in each climate zone. Based on these model results, the Reach Code Team determined the percentage savings of domestic water heating energy in terms of gas, electricity, and TDV for mixed fuel and all-electric, in each climate zone. The Reach Code Team then applied the savings



61 2019-07-25

percentages to the Small Hotel prototype domestic water heating energy in both the mixed-fuel and allelectric to determine energy savings for the drain water heat recovery measure in the Small Hotel. The Reach Code Team applied volumetric energy rates to estimate on-bill cost impacts from this measure.

6.4 Utility Rate Schedules

. The Reach Codes Team used the IOU and POU rates depicted in Figure 46 to determine the On-Bill savings for each prototype.

Figure 46. Utility Tariffs Analyzed Based on Climate Zone - Detailed View

Climate	Electric /	and a constant of the state of	Electricity (Time-o	f-use)	Natural Gas
Zones	Gas Utility	Medium Office	Medium Retail	Small Hotel	All Prototypes
CZ01	PG&E	A-10	A-1	A-1 or A-10	G-NR1:
CZ02	PG&E	A-10	A-10	A-1 or A-10	G-NR1
CZ03	PG&E	A-10	A-1 or A-10	A-1 or A-10	G-NR1
CZ04	PG&E	A-10	A-10	A-1 or A-10	G-NR1
CZ04-2	CPAU/PG&E	E-2	E-2	E-2.	G-NR1
CZ05	PG&E	A-10	A-1	A-1 or A-10	G-NR1
CZ05-2	PG&E/SCG	A-10	A-1	. A-1 or A-10	G-10 (GN-10)
CZ06	SCE/SCG	TOU-GS-2	TOU-GS-2	TOU-GS-2 or TOU-GS-3	G-10 (GN-10)
CZ06	LADWP/SCG	TOU-GS-2	TOU-GS-2	TOU-GS-2 or TOU-GS-3	G-10 (GN-10)
CZ07	SDG&E	AL-TOU+EECC (AL-TOU)	AL-TOU+EECC (AL-TOU)	AL-TOU+EECC (AL-TOU)	GN-3
CZ08	SCE/SCG	TOU-GS-2	TOU-GS-2	TOU-GS-2 or TOU-GS-3	G-10 (GN-10)
CZ08-2	LADWP/SCG	A-2 (B)	A-2 (B)	A-2 (B)	G-10 (GN-10)
CZ09	SCE/SCG	TOU-GS-2	TOU-GS-2	TOU-GS-2 or TOU-GS-3	G-10 (GN-10)
CZ09-2	LADWP/SCG	A-2 (B)	A-2 (B)	A-2 (B)	G-10 (GN-10)
CZ10	SCE/SCG	TOU-GS-2	TOU-GS-2	TOU-GS-2	G-10 (GN-10)
CZ10-2	SDG&E	AL-TOU+EECC (AL-TOU)	AL-TOU+FECC (AL-TOU):	AL-TOU+EECC (AL-TOU)	GN-3
CZ11	PG&E	A-10	A-10	A-10	G-NR1
CZ12	PG&E	A-10	A-10	À-1 or A-10	G-NR1
CZ12-2	SMUD/PG&E	GS	GS *	GS (G-NR1
CZ13	PG&E	A-10	A-10	A-10	G-NR1
CZ14	SCE/SCG	TOU-GS-3	TOU-GS-3	TOU-GS-3	G-10 (GN-10)
CZ14-2	SDG&E	AL-TOU+EECC (AL-TOU)	AL-TOU+EECC (AL-TOU)	AL-TOU+EECC (AL-TOU)	GN-3
CZ15	SCE/SCG	TOU-GS-3	TOU-GS-2	TOU-GS-2	G-10 (GN-10)
CZ16	PG&E	A-10	A-10	A-1 or A-10	G-NR1
CZ16-2	LADWP/SCG	A-2 (B)	A-2 (B)	A-2 (B)	G-10 (GN-10)

6.5 Mixed Fuel Baseline Energy Figures

Figures 47 to 49 show the annual electricity and natural gas consumption and cost, compliance TDV, and GHG emissions for each prototype under the mixed fuel design baseline.

Figure 47. Medium Office - Mixed Fuel Baseline

Climate Zone	Útility	Electricity Consumption (kWh)	Medium Offic Natural Gas Consumption (Therms)	Electricity Cost	Natural Gas Cost	Compliance TDV	GHG Emissions (lbs)	
Medium Office Mixed Fuel Baseline								
CZ01	PG&E	358,455	4,967	\$109,507	\$6,506	84	266,893	
CZ02	PG&E	404,865	3,868 .	\$130,575	\$5,256	122	282,762	
CZ03	PG&E	370,147	3,142	\$116,478	\$4,349	88	251,759	
CZ04	PG&E	431,722	3,759	\$140,916	\$5,144	141	299,993	
CZ04-2	CPAU	431,722	3,759	\$75,363	\$5,144	141	299,993	
CZ05	PG&E	400,750	3,240	\$131,277	\$4,481	106	269,768	
CZ05-2	SCG	400,750	3,240	\$131,277	\$3,683	106	269,768	
CZ06	SCE	397,441	2,117	\$74,516	\$2,718	105	253,571	
CZ06-2	LA	397,441	2,117	\$44,311	\$2,718	105	253,571	
CZ07	SDG&E	422,130	950	\$164,991	\$4,429	118	257,324	
CZ08	SCE	431,207	1,219	\$79,181	\$1,820	132	265,179	
CZ08-2	LA	431,207	1,219	\$46,750	\$1,820	132	265,179	
CZ09	SCE	456,487	1,605	\$86,190	\$2,196	155	287,269	
CZ09-2	LA	456,487	1,605	\$51,111	\$2,196	155	287,269	
CZ10	SDG&E	431,337	2,053	\$173,713	\$5,390	130	272,289	
CZ10-2	SCE.	431,337	2,053	\$80,636	\$2,603	130	272,289	
CZ11	PG&E	464,676	3,062	\$150,520	\$4,333	163	310,307	
CZ12	PG&E	441,720	3,327	\$142,902	\$4,647	152	299,824	
CZ12-2	SMUD	441,720	3,327	\$65,707	\$4,647	152	299,824	
CZ13	PG&E	471,540	3,063	\$150,919	\$4,345	161	316,228	
CZ14	SDG&E	467,320	3,266	\$185,812	\$6,448	165	314,258	
CZ14-2	SCE	467,320	3,266	\$92,071	\$3,579	165	314,258	
CZ15	SCE	559,655	1,537	\$105,388	\$2,058	211	347,545	
CZ16	PG&E	405,269	6,185	\$127,201	\$8,056	116	312,684	
CZ16-2	LA	405,269	6,185	\$43,115	\$8,056	116	312,684	



Figure 48. Medium Retail - Mixed Fuel Baseline

rigure 48. Metatum Retati – Mixeu Fuei Basenne							
Climate Zone	Utilitÿ	Electricity Consumption (kWh)	Natural Gas Consumption (Therms)	Electricity (Natural Gas Cost	Compliance TDV	GHG Emissions (lbs)
Medium Retail Mixed Fuel Baseline							
CZ01	PG&E	184,234	3,893	\$43,188	\$5,247	155	156,972
CZ02	PG&E	214,022	2,448	\$70,420	\$3,572	202	157,236
CZ03	PG&E	199,827	1,868	\$47,032	\$2,871	165	140,558
CZ04	PG&E	208,704	1,706	\$66,980	\$2,681	187	143,966
CZ04-2	CPAU	208,704	1,706	\$36,037	\$2,681	187	143,966
CZ05	PG&E	195,864	1,746	\$45,983	\$2,697	155	135,849
CZ05-2	SCG	195,864	1,746	\$45,983	\$2,342	155	135,849
CZ06	SCE	211,123	1,002	\$36,585	\$1,591	183	135,557
CZ06-2	LA	211,123	1,002	\$21,341	\$1,591	183	135,557
CZ07	SDG&E.	211,808	522	\$75,486	\$4,055	178	130,436
CZ08	SCE	212,141	793	\$36,758	\$1,373	190	133,999
CZ08-2	LA:	212,141	793	\$21,436	\$1,373	190	133,999
CZ09	SCE	227,340	970	\$40,083	\$1,560	218	146,680
CZ09-2	LA	227,340	970	\$23,487	\$1,560	218	146,680
CZ10	SDG&E	235,465	1,262	\$87,730	\$4,700	228	154,572
CZ10-2	SCE	235,465	1,262	\$41,000	\$1,853	228	154,572
CZ11	PG&E	234,560	2,415	\$76,670	\$3,547	244	170,232
CZ12	PG&E	228,958 +	2,309	\$75,084	\$3,426	234	165,133
CZ12-2	SMUD	228,958	2,309	\$32,300	\$3,426	234	165,133
CZ13	PG&E	242,927	1,983	\$81,995	\$3,034	258	170,345
CZ14.	SDG&E	264,589	1,672	\$97,581	\$5,059	277	178,507
CZ14-2	SCE	264,589	1,672	\$46,217	\$2,172	277	178,507
CZ15	SCE	290,060	518	\$50,299	\$1,083	300	179,423
CZ16	PG&E	212,204	4,304	\$67,684	\$5,815	197	180,630
CZ16-2	LA	212,204	4,304	\$20,783	\$5,815	197	180,630

Figure 49. Small Hotel - Mixed Fuel Baseline

rigure 45. Sman noter - wixed ruer basefine							
Climate Zone	Ütility.	Electricity Consumption (kWh)	Natural Gas Consumption (Therms)	Electricity Cost	Natural Gas Cost	Compliance TDV	GHG Emissions (lbs)
Small Hote	l Mixed Fue	l Baseline					
CZ01	PG&E	177,734	16,936	40,778	20,465	110	340,491
CZ02	PG&E	189,319	12,696	53,396	15,664	110	293,056
CZ03	PG&E	183,772	12,341	42,325	15,210	.98	284,217
CZ04	PG&E	187,482	11,945	52,118	14,806	106	281,851
CZ04-2	CPAU	187,482	11,945	32,176	14,806	106	281,851
CZ05	PG&E	187,150	11,979	43,182	14,733	98	281,183
CZ05-2	SCG	187,150	11,979	43,182	10,869	98	281,183
CZ06	SCE	191,764	8,931	28,036	8,437	98	244,664
CZ06-2	LA	191,764	8,931	16,636	8,437	98	244,664
CZ07	SDG&E	189,174	8,207	58,203	10,752	90	233,884
CZ08	SCE	190,503	8,372	27,823	7,991	94	236,544
CZ08-2	LA	190,503	8,372	16,555	7,991	94	236,544
CZ09	SCE	198,204	8,421	30,262	8,030	103	242,296
CZ09-2	LA	198,204	8,421	17,951	8,030	103	242,296
CZ10	SDG&E	215,364	8,437	71,713	10,926	122	255,622
CZ10-2	SCE	215,364	8,437	33,736	8,043	122	255,622
CZ11	PG&E	219,852	10,271	63,724	12,882	131	282,232
CZ12	PG&E	199,499	10,422	46,245	13,022	115	270,262
CZ12-2	SMUD	199,499	10,422	26,872	13,022	115	270,262
CZ13	PG&E	226,925	10,048	65,559	12,629	132	284,007
CZ14	SDG&E	226,104	10,075	73,621	12,167	134	283,287
CZ14-2	SCE	226,104	10,075	35,187	9,350	134	283,287
CZ15	SCE	280,595	5,598	42,852	5,777	152	260,378
CZ16	PG&E	191,231	17,618	51,644	21,581	127	358,590
CZ16-2	LA	191,231	17,618	16,029	21,581	127	358,590

6.6 Hotel TDV Cost Effectiveness with Propane Baseline

The Reach Codes Team further analyzed TDV cost effectiveness of the all-electric packages with a mixed-fuel design baseline using propane instead of natural gas. Results for each package are shown in Figure 50. through Figure 53. below:

All electric models compared to a propane baseline have positive compliance margins in all climate zones when compared to results using a natural gas baseline. Compliance margin improvement is roughly 30 percent, which also leads to improved cost effectiveness for the all-electric packages. These outcomes are likely due to the TDV penalty associated with propane when compared to natural gas.



Across packages, TDV cost effectiveness with a propane baseline follows similar trends as the natural gas baseline. Adding efficiency measures increased compliance margins by 3 to 10 percent depending on climate zone, while adding high efficiency HVAC and SHW equipment alone increased compliance margins by smaller margins of about 2 to 4 percent compared to the All-Electric package.

Figure 50. TDV Cost Effectiveness for Small Hotel, Propane Baseline - Package 2 All-Electric Federal Code Minimum

•	Complianc e				
'					
1 1				j ter	, · · ·
Climate	Margin	Incremental		B/C Ratio	
Zone	(%)	Package Cost	\$-TDV Savings	(TDV)	NPV (TDV)
CZ01	-4%	(\$1,271,869)	(\$28,346)	44.9	\$1,243,523
CZ02	27%	(\$1,272,841)	\$170,263	>1	\$1,443,104
CZ03	-3%	(\$1,275,114)	(\$16,425)	77.6	\$1,258,689
CZ04	26%	(\$1,274,949)	\$155,466	>1	\$1,430,414
CZ05	27%	(\$1,275,002)	\$154,709		\$1,429,710
CZ06	17%	(\$1,275,143)	\$126,212	>1	\$1,401,355
CZ07	25%	(\$1,273,490)	\$117,621	\$1	\$1,391,111
CZ08	24%	(\$1,271,461)	\$122,087	21	\$1,393,548
CZ09	23%	(\$1,273,259)	\$123,525	>1	\$1,396,784
CZ10	18%	(\$1,270,261)	\$109,522	>1	\$1,379,783
CZ11	19%	(\$1,271,070)	\$129,428	>1	\$1,400,498
CZ12	-4%	(\$1,272,510)	(\$26,302)	48.4	\$1,246,208
CZ13	18%	(\$1,270,882)	\$124,357	>1	\$1,395,239
CZ14	17%	(\$1,271,241)	\$117,621	>1	\$1,388,861
CZ15	-7%	(\$1,269,361)	(\$45,338)	28.0	\$1,224,023
CZ16	9%	(\$1,275,637)	\$68,272	>1	\$1,343,908



Figure 51. TDV Cost Effectiveness for Small Hotel, Propane Baseline - Package 3A (All-Electric + EE)

		Electri	ս առույ		
Climate	Compliance	Incremental		B/C Ratio	
Zone	Margin (%)	Package Cost	\$-TDV Savings	(TDV)	NPV (TDV)
CZ01	35%	(\$1,250,898)	\$252,831	>1	\$1,503,729
CZ02	34%	(\$1,251,870)	\$217,238	>1	\$1,469,108
CZ03	37%	(\$1,254,142)	\$218,642	>1	\$1,472,784
CZ04	31%	(\$1,250,769)	\$191,393	>1	\$1,442,162
CZ05	36%	(\$1,254,031)	\$208,773	>1	\$1,462,804
CZ06	25%	(\$1,250,964)	\$159,714	>1	\$1,410,677
CZ07	32%	(\$1,249,311)	\$154,111	>1	\$1,403,422
CZ08	29%	(\$1,247,282)	\$146,536	>1	\$1,393,818
CZ09	27%	(\$1,249,080)	\$146,671	>1	\$1,395,751
; CZ10	22%	(\$1,246,081)	\$134,477	>1	\$1,380,559
CZ11	23%	(\$1,246,891)	\$157,138	>1	\$1,404,029
CZ12	27%	(\$1,248,330)	\$167,945	>1	\$1,416,276
CZ13	22%	(\$1,246,703)	\$149,270	>1	\$1,395,973
CZ14	21%	(\$1,247,061)	\$145,269	>1	\$1,392,331
CZ15	14%	(\$1,245,182)	\$93,647	>1	\$1,338,829
CZ16	20%	(\$1,254,665)	\$154,035	>1	\$1,408,701

Figure 52. TDV Cost Effectiveness for Small Hotel, Propane Baseline – Package 3B (All-Electric + EE + PV)

		LICCUIC 1			
Climate	Compliance	Incremental			
Zone	Margin (%)	Package Cost	S-TDV Savings	B/C Ratio (TDV)	NPV (TDV)
CZ01	35%	(\$1,043,528)	\$511,688	>1	\$1,555,215
CZ02	34%	(\$1,044,500)	\$524,460	>1	\$1,568,960
CZ03	37%	(\$1,046,772)	\$518,485	>1	\$1,565,257
CZ04	31%	(\$1,043,399)	\$505,579	>1	\$1,548,978
CZ05	36%	(\$1,046,660)	\$526,668	>1	\$1,573,328
CZ06	25%	(\$1,043,594)	\$469,623	>1	\$1,513,216
CZ07	32%	(\$1,041,941)	\$471,513	>1	\$1,513,454
CZ08	29%	(\$1,039,912)	\$475,973	>1	\$1,515,885
CZ09	27%	(\$1,041,710)	\$467,971	>1.	\$1,509,681
CZ10	22%	(\$1,038,711)	\$454,832	>1:	\$1,493,543
CZ11	23%	(\$1,039,521)	\$474,844	>1	\$1,514,364
CZ12	27%	(\$1,040,960)	\$484,667	>1	\$1,525,627
CZ13	22%	(\$1,039,333)	\$454,108	>1	\$1,493,441
CZ14	21%	(\$1,039,691)	\$505,398	>1	\$1,545,090
CZ15	14%	(\$1,037,811)	\$423,879	>1	\$1,461,691
CZ16	20%	(\$1,047,295)	\$480,407	>1	\$1,527,702

Figure 53. TDV Cost Effectiveness for Small Hotel, Propane Baseline – Package 3C (All Electric + HE)

		Electric	L+ HEJ	a construction form to	<u> </u>
Climate Zone	Compliance Margin (%)	Incremental Package Cost	\$-TDV Savings	B/C Ratio (TDV)	NPV (TDV)
CZ01	27%	(\$1,256,423)	\$194,975	>1	\$1,451,398
CZ02 ,	28%	(\$1,258,328)	\$177,378	>1	\$1,435,706
CZ03	28%	(\$1,263,867)	\$164,094	>1	\$1,427,961
CZ04	26%	(\$1,262,963)	\$155,314	>1	\$1,418,277
CZ05	26%	(\$1,263,327)	\$153,271	1 >1 -1	\$1,416,598
CZ06	17%	(\$1,263,779)	\$122,011	>1	\$1,385,790
CZ07	24%	(\$1,260,844)	\$116,751	>1	\$1,377,594
CZ08	25%	(\$1,256,326)	\$122,995	>1	\$1,379,321
CZ09	24%	(\$1,260,223)	\$128,482	>1	\$1,388,706
CZ10	20%	(\$1,253,181)	\$121,595	>1	\$1,374,776
CZ11	21%	(\$1,254,613)	\$143,658	>1	\$1,398,271
CZ12	23%	(\$1,257,919)	\$142,901	>1	\$1,400,820
CZ13	21%	(\$1,254,386)	\$138,625	>1	\$1,393,011
. CZ14	20%	(\$1,254,978)	\$136,430	>1	\$1,391,407
CZ15	14%	(\$1,251,932)	\$96,087	>1	\$1,348,019
CZ16	15%	(\$1,263,534)	\$122,011	>1	\$1,385,545



6.7 PV-only and PV+Battery-only Cost Effectiveness Results Details

The Reach Code Tea evaluated cost effectiveness of installing a PV system and battery storage in six different measure combinations over a 2019 code-compliant baseline for all climate zones. The baseline for all nonresidential buildings is a mixed-fuel design.

All mixed fuel models are compliant with 2019 Title24, whereas all electric models can show negative compliance. The compliance margin is the same as that of their respective federal minimum design and is not affected by addition of solar PV or battery. These scenarios evaluate the cost effectiveness of PV and/or battery measure individually. The climate zones where all-electric design is not compliant will have the flexibility to ramp up the efficiency of appliance or add another measure to be code compliant, as per package 1B and 3B in main body of the report. The large negative lifecycle costs in all electric packages are due to lower all-electric HVAC system costs and avoided natural gas infrastructure costs. This is commonly applied across all climate zones and packages over any additional costs for PV and battery.

6.7.1 Cost Effectiveness Results - Medium Office

Figure 54 through Figure 61 contain the cost-effectiveness findings for the Medium Office packages. Notable findings for each package include:

- ♦ Mixed-Fuel + 3 kW PV Only: All packages are cost effective using the On-Bill and TDV approaches:
- Mixed-Fuel + 3 kW PV + 5 kWh Battery: The packages are mostly cost effective on a TDV basis except in CZ1. As compared to the 3 kW PV only package, battery reduces cost effectiveness. This package is not cost effective for LADWP and SMUD territories using an On-Bill approach.
- Mixed-Fuel + PV only: The packages are less cost effective as compared to 3 kW PV packages in most climate zones. In areas served by LADWP, the B/C ratio is narrowly less than 1 and not cost effective.
- ♦ Mixed-Fuel + PV + 50 kWh Battery: The packages are cost effective in all climate zones except for in the areas served by LADWP. On-Bill and TDV B/C ratios are slightly lower compared to the PV only package.
- All-Electric + 3 kW PV: Packages are on-bill cost effective in ten of sixteen climate zones. Climate zones 1,2,4,12, and 16 were not found to be cost-effective from an on-bill perspective. These zones are within PG&E's service area. Packages are cost effective using TDV in all climate zones except CZ16.
- All-Electric + 3 kW PV + 5 kWh Battery: Packages are slightly more cost effective than the previous minimal PV only package. Packages are on-bill cost effective in most climate zones except for 1,2 and 16 from an on-bill perspective. These zones are within PG&E's service area. Packages are cost effective using TDV in all climate zones except CZ16.
- All-Electric + PV only: All packages are cost effective and achieve savings using the On-Bill and TDV approaches.



All-Electric + PV + 50 kWh Battery: All packages are cost effective and achieve savings using the On-Bill and TDV approaches. On-Bill and TDV B/C ratios are slightly lower compared to the PV only package.

Figure 54. Cost Effectiveness for Medium Office - Mixed Fuel + 3kW PV

		Elec	Gas	GHG	ness for Meur	Lifecycle		B/C	B/C		
		Savings	Savings	savings	Incremental	Energy Cost	Lifecycle \$-	Ratio	Ratio	NPV	NPV
CZ	IOU territory	(kWh)	(therms)	(tons)	Package Cost	Savings	TDV Savings	(On-bill)	(TDV)	(On-bill)	(TDV)
Mixed F	uel + 3kW PV					jaka je alabade					
CZ01	PG&E	3,941	0	0.8	\$5,566	(, \$15,743	\$8,448	2.8	1.5	\$10,177	\$2,882
CZ02	PG&E	4,785	0	0.9	\$5,566	\$20,372	\$10,500	3.7	1.9	\$14,806	\$4,934
CZ03	PG&E	4,660	0	0.9	\$5,566	\$20,603	\$9,975	3,7	1.8	\$15,037	\$4,409
CZ04	PG&E	5,056	.0	1.0	\$5,566	\$20,235	\$11,073	3.6	2.0	\$14,669	\$5,507
CZ04-2	CPAU	5,056	0	1.0	\$5,566	\$11,945	\$11,073	2.1	2.0	\$6,379	\$5,507
CZ05	PG&E	5,027	.0	1.0	\$5,566	\$23,159	\$10,834	4.2	1.9	\$17,593	\$5,268
CZ06	SCE	4,853	0	0.9	\$5,566	\$10,968	\$10,930	2.0	2.0	\$5,402	\$5,364
CZ06-2	LADWP	4,853	. 0	0.9	\$5,566	\$6,575	\$10,930	1,2	- 4 2.0,	\$1,009	\$5,364
CZ07	SDG&E	4,960	0	1.0	\$5,566	\$17,904	\$11,025	3.2	2.0	\$12,338	\$5,459
CZ08	SCE	4,826	, O	0.9	\$5,566	\$10,768	\$11,359	1.9	2.0	\$5,202	\$5,793
CZ08-2	LADWP	4,826	0	0.9	\$5,566	\$6,503	\$11,359	1.2	2.0	\$937	\$5,793
CZ09	SCE	4,889	. 0	1.0	\$5,566	\$10,622	\$11,216	1.9	2.0	\$5,056	\$5,650
CZ09-2	LADWP	4,889	. 0	1.0	\$5,566	\$6,217	\$11,216		2.0	\$651	\$5,650
CZ10	SDG&E	4,826	. 0	0.9	\$5,566	\$21,280	\$10,787	3.8	1.9	\$15,714	\$5,221
CZ10-2	SCE	4,826	0	0.9	\$5,566	\$11,598	\$10,787	2.1	1.9	\$6,032	\$5,221
CZ1·1	PG&E	4,701	0	0.9	\$5,566	\$19,869	\$10,644	3.6	1.9	\$14,303	\$5,078
CZ12	PG&E	4,707	0	0.9	\$5,566	\$19,643	\$10,644	3.5	1.9	\$14,077	\$5,078
CZ12-2	SMÜD	4,707	0	0.9	\$5,566	\$8,005	\$10,644	1.4	1.9	\$2,439	\$5,078
CZ13	PG&E	4,633	0	0.9	\$5,566	\$19,231	\$10,262	3.5	1.8	\$13,665	\$4,696
CZ14	SDG&E	5,377	- 0	1.0	\$5,566	\$18,789	\$12,600	3.4	2.3	\$13,223	\$7,034
CZ14-2	SCE :	5,377	0	1.0	\$5,566	\$10,512	\$12,600	1.9	2.3	\$4,946	\$7,034
CZ15	SCE	5,099	0	1.0	\$5,566	\$10,109	\$11,550	1.8	2.1	\$4,543	\$5,984
CZ16	PG&E	5,096	Ö	1.0	\$5,566	\$21,836	\$10,882	3.9	2.0	\$16,270	\$5,316
CZ16-2	LADWP	5,096	.0	1.0	\$5,566	\$6,501	\$10,882	- 1.2	2.0	\$935	\$5,316

Figure 55. Cost Effectiveness for Medium Office - Mixed Fuel + 3kW PV + 5 kWh Battery

T #1	31.4	Elec	Joe Hacetave	GHG	denium Omice	Lifecycle	Z · · · · · · · · · · ·	B/C	B/C	· ·	
ļ			Carles Carles		Nasanananan kati k		\$-TDV	Ratio	Ratio	NPV (On-	NPV
67	101114	Savings	Gas Savings	savings	Incremental	Energy Cost		(On-bill)	(TDV)	bill)	(TDV)
CZ	IOU territory	(kWh)	(therms)	(tons)	Package Cost	Savings	Savings	(On-piii)	(104)	DIII)	(IDV)
 	uel + 3kW PV +				A0 =00	44554	0.004.00				(64.070)
CZ01	PG&E	3,941	0	0.8	\$9,520	\$15,743	\$8,448	1.7	0.9	\$6,223	(\$1,072)
CZ02	PG&E	4,785	0.	0.9	\$9,520	\$20,372	\$10,500	2.1	1/1	\$10,852	\$980
CZ03	PG&E	4,660	0	0.9	\$9,520	\$20,603	\$9,975	2.2	1.0	\$11,083	\$455
CZ04	PG&E	5,056	.0.	1.0	\$9,520	\$20,235	\$11,073	2.1		\$10,714	\$ \$1,553
CZ04-2	CPAU	5,056	0	1.0	\$9,520	\$11,945	\$11,073	1.3	1.2	\$2,425	\$1,553
CZ05	PG&E	5,027	.0	1.0	\$9,520	\$23,159	\$10,834	2.4	1.1	\$13,639	\$1,314
CZ06	SCE	4,853	:0.	0.9	\$9,520	\$10,968	\$10,930	1.2	1.1	\$1,448	\$1,410
CZ06-2	LADWP	4,853	Ő	0.9	\$9,520	\$6,575	\$10,930	0.7	1.1	(\$2,945)	\$1,410
CZ07	SDG&E	4,960	.0	1.0	\$9,520	\$17,904	\$11,025	1.9	1.2	\$8,384	\$1,505
CZ08	SCE	4,826	Ö	0.9	\$9,520	\$10,768_	\$11,359	7 11	1.2	\$1,248	\$1,839
CZ08-2	LADWP	4,826	0	0.9	\$9,520	\$6,503	\$11,359	0.7	1.2	(\$3,017)	\$1,839
CZ09	SCE	4,889	:0	1.0	- 520رو\$	\$10,622	\$11,216	111	1.2	\$1,102	\$1,696
CZ09-2	LADWP	4,889	0.	1.0	\$9,520	\$6,217	\$11,216	0.7	1.2	(\$3,303)	\$1,696
CZ10	SDG&E	4,826	0	0.9	\$9,520	\$21,280	\$10,787	2.2	1.1	\$11,760	\$1,267
CZ10-2	SCE	4,826	-0:	0.9	\$9,520	\$11,598	\$10,787	11/11/1/27	1.1	\$2,078	\$1,267
CZ11	PG&E	4,701	0	0.9	\$9,520	\$19,869	\$10,644	2.1	1.1	\$10,349	\$1,123
CZ12	PG&E	4,707	.0.4	0,9	\$9,520	\$19,643	\$10,644	2.1	1.1	\$10,123	\$1,123
CZ12-2	SMUD	4,707	0	0.9	\$9,520	\$8,005	\$10,644	8.0	1.1	(\$1,515)	\$1,123
CZ13	PG&E	4,633	0.1	0.9	\$9,520	\$19,231	\$10,262	2.0	1.1	\$9,711	\$742
CZ14	SDG&E	5,377	.0	1.0	\$9,520	\$18,789	\$12,600	2.0	1.3	\$9,269	- \$3,080
CZ14-2	SCE	5,377	0:	1.0	\$9,520	\$10,512	\$12,600	111	1.3	\$992	\$3,080
CZ15	SCE	5,099	0	1.0	\$9,520	\$10,109	\$11,550	1.1	1,2	\$589	\$2,030
CZ16	PG&E	5,096	0.	. 1.0	\$9,520	\$21,836	\$10,882	2.3	1.1	\$12,316	\$1,362
CZ16-2	LADWP	5,096	.0	1.0	\$9,520	\$6,501	\$10,882	0.7	1.1	. (\$3,019)	\$1,362

Figure 56. Cost Effectiveness for Medium Office - Mixed Fuel + 135kW PV

	1				C33 IOI IIICUIU		T	B/C	1		T
		miss.	~	GHG	4	l'ifa accide	life avale		B/C	•,	
		Elec	Gas		Yarran sana ang kadi	Lifecycle	Lifecycle	Ratio	1	AUDIT (Ob	MIDNA
		Savings	Savings	savings	Incremental	Energy Cost	TDV	(On-	Ratio	NPV (On-	NPV
CZ	IOU territory	(kWh)	(therms)	(tons)	Package Cost	Savings	Savings	bill)	(TDV)	bill)	(TDV)
	uel +135kW PV	entrant outside the first					Charles and the control of the contr				
CZ01	PG&E	177,340	0:	34.3	\$302,856	\$526,352	\$380,399	1.7	1.3	\$223,497	\$77,544
CZ02	PG&E	215,311	0	41.5	\$302,856	\$666,050	\$471,705	2.2	1.6	\$363,194	\$168,849
CZ03	PG&E	209,717	0	40.7	\$302,856	\$645,010	\$449,797	2.1	1.5	\$342,154	\$146,942
CZ04	PG&E	227,535	0.	44.0	\$302,856	\$686,434	\$497,431	2.3	1.6	\$383,578	\$194,575
CZ04-2	CPAU	227,535	Ö	44.0	\$302,856	\$537,521	\$497,431	1.8	1.6	\$234,665	\$194,575
CZ05:	PG&E	226,195	0	44.1	\$302,856	\$753,230	\$486,596	2.5	1.6	\$450,374	\$183,741
CZ06	SCE	218,387	0	42.3	\$302,856	\$401,645	\$492,515	1.3	1.6	\$98,789	\$189,659
CZ06-2	LADWP	218,387	0.	42.3	\$302,856	\$233,909	\$492,515	0.8	1.6	(\$68,947)	\$189,659
CZ07	SDG&E	223,185	0	43.3	\$302,856	\$623,078	\$496,667	2.1	1.6	\$320,223	\$193,811
CZ08	SCE	217,171	0	42.0	\$302,856	\$389,435	\$510,270	1.3	1.7	\$86,579	\$207,414
CZ08-2	LADWP	217,171	0.	42.0	\$302,856	\$222,066	\$510,270	0.7	1.7	. (\$80,790)	\$207,414
CZ09	SCE	220,010	. O.	43.2	\$302,856	\$387,977	\$505,783	1.3	1.7	\$85,122	\$202,928
CZ09-2	LADWP	220,010	. 0	43.2	\$302,856	\$226,516	\$505,783	0.7	1.7	(\$76,340)	\$202,928
CZ10	SDG&E	217,148	. 0	42.5	\$302,856	\$632,726	\$485,451	2.1	1.6	\$329,870	\$182,595
CZ10-2	SCE .	217,148	0	42.5	\$302,856	\$394,884	\$485,451	1.3	1.6	\$92,028	\$182,595
CZ11	PG&E	211,556	O	40.9	\$302,856	\$671,691	\$478,912	2.2	1.6	\$368,835	\$176,056
CZ12	PG&E	211,824	. 0	40.9	\$302,856	\$653,242	\$478,101	2.2	1.6	\$350,386	\$175,245
CZ12-2	SMUD	211,824	0	40.9	\$302,856	\$345,255	\$478,101	1.1	1.6	\$42,399	\$175,245
CZ13	PG&E	208,465	0	40.5	\$302,856	\$651,952	\$462,732	2.2	1.5	\$349,096	\$159,876
CZ14	SDG&E	241,965	0	46.7	\$302,856	\$659,487	\$566,351	2.2	1.9	\$356,632	\$263,496
· CZ14-2	SCE	241,965	0	46.7	\$302,856	\$401,712	\$565,351	1.3	1.9	\$98,856	\$263,496
CZ15	SCE	229,456	0	43.9	\$302,856	\$378,095	\$520,102	1.2	1.7	\$75,239	\$217,246
CZ16	PG&E	229,317	0:	44.8	\$302,856	\$707,095	\$489,508	2.3	1.6	\$404,239	\$186,652
CZ16-2	LADWP:	229,317	0	44.8	\$302,856	\$223,057	\$489,508	0.7	1.6	(\$79,799)	\$186,652



Figure 57, Cost Effectiveness for Medium Office - Mixed Fuel + 135kW PV + 50 kWh Battery

	1.151	1003	LIHILLEHI	ICSS ICI III	lealum Unice	MACHILL	A LOUISIT		17 64 11 121	CLLOX y	<u> </u>
				e inge				B/C			
		Elec	Gas	GHG		Lifecycle	Lifecycle	Ratio	B/C		
		Savings.	Savings	savings	Incremental	Energy Cost	TDV	(On-	Ratio	NPV (On-	NPV
CZ	IOU territory	(kWh)	(therms)	(tons)	Package Cost	Savings	Savings	bill)	(TDV)	bill)	(TDV)
Mixed F	uel + 135kW PV	+50 kWh Ba	ttery								
CZ01	PG&E	176,903	0	35.3	\$330,756	\$525,948	\$381,450	1.6	- 1.2	\$195,192	\$50,694
CZ02	PG&E	214,861	-0	42.6	\$330,756	\$665,864	\$472,898	2.0	1.4	\$335,108	\$142;142
CZ03	PG&E	209,255	0	41.8	\$330,756	\$644,170	\$451,611	1.9	1.4	\$313,414	\$120,855
CZ04 -	PG&E	227,076	0:	45.0	\$330,756	\$685,605	\$502,108	2.1	1.5	\$354,849	\$171,352
CZ04-2	CPAU	227,076	0	45.0	\$330,756	\$536,463	\$502,108	1.6	1.5	\$205,707 <i>-</i>	\$171,352
CZ05	PG&E	225,752	0.	45.1	\$330,756	\$753,558	\$487,742	2.3	1.5	\$422,803	\$156,986
CZ06	SCE	217,939	.0:	43.4	\$330,756	\$401,356	\$494,042	1.2	1.5	\$70,601	\$163,286
CZ06-2	LADWP .	217,939	0	43.4	\$330,756	\$233,673	\$494,042	0.7	1.5	(\$97,083)	\$163,286
CZ07	SDG&E	222,746	0	44.4	\$330,756	\$628,383	\$498,147	1.9	1.5	\$297,627	\$167,391
CZ08	SCE	216,724	0:	43.1	\$330,756	\$389,184	\$511,511	1.2	1.5	\$58,428	\$180,755
CZ08-2	LADWP	216,724	0	43.1	\$330,756	\$221,839	\$511,511	0.7	1.5	(\$108,917)	\$180,755
CZ09	SCE	219,563	0	44.2	\$330,756	\$387,728	\$506,929	1.2	1.5	\$56,972	\$176,173
CZ09-2	LADWP	219,563	0	44.2	\$330,756	\$226,303	\$506,929	0.7	1:5	(\$104,453)	\$176,173
CZ10	SDG&É	216,700	0	43.5	\$330,756	\$638,040	\$486,644	1.9	1.5	\$307,284	\$155,888
CZ10-2	SCE	216,700	0	43.5	\$330,756	\$394,633	\$486,644	1.2	1.5	\$63,877	\$155,888
CZ11	PG&E	211,129	Ó	41.9	\$330,756	\$670,932	\$481,298	2.0	1.5	\$340,177	\$150,543
CZ12	PG&E	211,386	Q	41.9	\$330,756	\$652,465	\$482,826	2.0	1:5	\$321,709	\$152,070
CZ12-2	SMUD:	211,386	.O.	41.9	\$330,756	\$344,668	\$482,826	1.0	1.5	\$13,913	\$152,070
CZ13	PG&E	208,045	0.	41.5	\$330,756	\$651,191	\$473,280	- 2.0	1.4	\$320,435	\$142,524
CZ14	SDG&E	241,502	0	47.7	\$330,756	\$672,601	\$569,454	2.0	1.7	\$341,846	\$238,698
CZ14-2	SCE	241,502	0	47.7	\$330,756	\$401,450	\$569,454	1.2	1.7	\$70,694	\$238,698
CZ15	SCE	229,062	. 0	44.8	\$330,756	\$377,827	\$521,963	1,1	1.6	\$47,071	\$191,208
CZ16	PG&E	228,825	. 0	45.9	\$330,756	\$706,201	\$496,190	2.1	1.5	\$375,445	\$165,434
CZ16-2	LADWP .	228,825	.0	45.9	\$330,756	\$222,802	\$496,190	0.7	1.5	(\$107,953)	\$165,434

Figure 58. Cost Effectiveness for Medium Office-All-Electric + 3kW PV

		Elec Savings	Gas Savings	GHG savings	Incremental	Lifecycle Energy Cost	Lifecycle TDV	B/C Ratio (On-	B/C Ratio		
CZ	IOU territory	(kWh)	(therms)	(tons)	Package Cost	Savings	Savings	bill)	(TDV)	NPV (On-bill)	NPV (TDV)
	tric + 3kW PV							54456			
CZ01	PG&E	-49,716	4967	10.9	(\$80,523)	(\$84,765)	(\$49,972)	0.9	1.6	(\$4,242)	\$30,551
CZ02	PG&E	-44,899	3868	6.0	(\$66,965)	(\$83,115)	(\$30,928)	0.8	2.2	(\$16,150)	\$36,037
CZ03	PG&E	-31,226	3142	6.5	(\$75,600)	(\$39,441)	(\$19,617)	1.9	3.9	\$36,159	\$55,983
CZO4.	PG&E.	-43,772	3759	5.7	(\$62,282)	(\$70,999)	(\$29,496)	0.9	2.1	(\$8,717)	\$32,786
CZ04-2.	CPAU.	-43,772	3759	5.7	(\$62,282)	(\$8,050)	(\$29,496)	7.7	2.1	\$54,232	\$32,786
CZ05	PG&E	-35,504	3240	5.5	(\$77,773)	(\$42,559)	(\$29,162)	1.8	2.7	\$35,214	\$48,611
CZ06	SCE	-21,321	2117	4.0	(\$69,422)	\$35,862	(\$9,641)	>1	7.2	\$105,284	\$59,781
CZ06-2	LADWP	-21,321	2117	4.0	(\$69,422)	\$32,936	(\$9,641)	>1	7.2	\$102,358	\$59,781
CZ07.	SDG&E	-7,943	950	1.9	(\$63,595)	\$64,781	(\$382).	>1	166.6	\$128,376	\$63,214
CZ08.	SCE	-10,854	1219	2.5	(\$62,043)	\$28,651	(\$1,289)	√/ >1∵	48.1	\$90,694	\$60,755
CZ08-2	LADWP	-10,854	1219	2.5	(\$62,043)	\$25,122	(\$1,289)	>1	48.1	\$87,165	\$60,755
CZ09	SCE	-14,878	1605	3.3	(\$56,372)	\$31,542	(\$3,246)	>1	17.4	\$87,913	\$53,126
CZ09-2	LADWP	-14,878	1605	3.3	(\$56,372)	\$28,145	(\$3,246)	>1	17.4	\$84,517	\$53,126
CZ10	SDG&E	-22,588	2053	3.1	. (\$41,171)	\$59,752	(\$12,553)	>1	3.3	\$100,924	\$28,619
CZ10-2	SCE	-22,588	2053	3.1	(\$41,171)	\$32,039	(\$12,553)	>1	3.3	\$73,211	\$28,619
CZ11	PG&E	-35,455	3062	4.5	(\$57,257)	(\$53,776)	(\$22,194)	1.1	2.6	\$3,481	\$35,063
CZ12 .	PG&E	-38,704	3327	5.0	(\$61,613)	(\$66,808)	(\$24,819)	0.9	2.5	(\$5,195)	\$36,794
CZ12-2	SMUD	-38,704	3327	5.0	(\$61,613)	\$2,897	(\$24,819)	>1	2.5	\$64,510	\$36,794
CZ13	PG&E	-35,016	3063	4.7	(\$55,996)	(\$52,159)	(\$22,146)	1.1	2.5	\$3,836	\$33,849
CZ:14	SDG&E	-38,945	3266	4.5	(\$58,426)	\$24,867	(\$25,821)	>1	2.3	\$83,293	\$32,605
CZ14-2	SCE	-38,945	3266	4.5	(\$58,426)	\$15,338	(\$25,821)	>1	2.3	\$73,764	\$32,605
CZ15	SCE	-14,818	1537	2.8	(\$29,445)	\$22,852	(\$3,914)	>1	7.5	\$52,298	\$25,532
CZ16 -	PG&E	-88,966	6185	6.6	(\$57,366)	(\$193,368)	(\$139,989)	0.3	0.4	(\$136,002)	(\$82,623)
CZ16-2	LADWP.	-88,966	6185	- 6.6	(\$57,366)	\$36,354	(\$139,989)	>1	0.4	\$93,720	(\$82,623)

Figure 59. Cost Effectiveness for Medium Office - All-Electric + 3kW PV + 5 kWh Battery

			OSL LITTCCH,				710 1 71111				
-								B/C			
		Elec	Gas	GHG		Lifecycle		Ratio	B/C		
		Savings	Savings	savings	Incremental	Energy Cost	\$-TDV	(On-	Ratio	NPV (On-	NPV
CZ	IOU territory	(kWh)	(therms)	(tons)	Package Cost	Savings	Savings	bill)	(TDV)	bill)	(TDV)
All-Elect	ric + 3kW PV + 5	kWh Batter	y								
CZ01	PG&E	-49,716	4967	10.9	(\$78,897)	(\$84,765)	(\$49,972)	0.9	1.6	(\$5,868)	\$28,925
CZ02 ·	PG&E	-44,899	3868	6.0	(\$78,897)	(\$83,115)	(\$30,928)	0.9	2.6	(\$4,218)	\$47,969
CZ03	PG&E	-31,226	3142	6.5	(\$78,897)	(\$39,441)	(\$19,617)	2.0	4.0	\$39,456	\$59,280
CZ04	PG&E	-43,772	3759	5,7	(\$78,897)	(\$70,999)	(\$29,496)	1.1	2.7	\$7,898	\$49,400
CZ04-2	CPAU	-43,772	3759	5.7	(\$78,897)	(\$8,050)	(\$29,496)	9.8	2.7	\$70,847	\$49,400
CZ05	PG&E	-35,504	3240	5.5	(\$78,897)	(\$42,559)	(\$29,162)	1.9	2.7	\$36,338	\$49,735
CZ06	SCE	-21,321	2117	4.0	(\$78,897)	\$35,862	(\$9,641)	\$1.	8.2	\$114,759	F\$69,256
CZ06-2	LADWP	-21,321	2117	4.0	(\$78,897)	\$32,936	(\$9,641)	# 54 >1	8.2	\$111,833	\$69,256
CZ07	SDG&E	-7,943	950	1.9	(\$78,897)	\$64,781	(\$382)	>1	206.6	\$143,678	\$78,515
CZ08	SCE'	-10,854	1219	2.5	(\$78,897)	\$28,651	(\$1,289)	美国 >15	61.2	\$107,548	÷ \$77,608
CZ08-2	LADWP:	-10,854	1219	2.5	(\$78,897)	\$25,122	(\$1,289)	>1	61.2	\$104,019	\$77,608
CZ09	SCE	-14,878	1605	3.3	(\$78,897)	\$31,542	(\$3,246)	>1	24.3	\$110,439	\$75,651
CZ09-2	LADWP	-14,878	1605	3.3	(\$78,897)	\$28,145	(\$3,246)	>1	24.3	\$107,042	\$75,651
CZ10	SDG&E	-22,588	2053	3.1	(\$78,897)	\$59,752	(\$12,553)	>1	6.3	\$138,649	\$66,344
CZ10-2	SCE	-22,588	2053	3.1	(\$78,897)	\$32,039	(\$12,553)	>1	6.3	\$110,936	\$66,344
CZ11	PG&E	-35,455	3062	4.5	(\$78,897)	(\$53,776)	(\$22,194)	1.5	3.6	\$25,121	\$56,703
CZ12.	PG&E	-38,704	3327	5.0	(\$78,897)	(\$66,808)	(\$24,819)	1.2	3.2	\$12,089	\$54,078
CZ12-2	SMUD	-38,704	3327	5.0	(\$78,897)	\$2,897	(\$24,819)	F/9-1>1	3.2	\$81,794	\$54,078
CZ13	PG&E	-35,016	3063	4.7	(\$78,897)	(\$52,159)	(\$22,146)	1.5	3,6	\$26,738	\$56,751
CZ14	SDG&E	-38,945	3266	4.5	(\$78,897)	\$24,867	(\$25,821)	≥1	3.1	\$103,764	\$53,076
CZ14-2	SCE	-38,945	3266	4.5	(\$78,897)	\$15,338	(\$25,821)	 	3.1	\$94,235	\$53,076
CZ15	SCE	-14,818	1537	. 2.8	(\$78,897)	\$22,852	(\$3,914)	->1	20.2	\$101,749	\$74,983
CZ16	PG&E	-88,966	6185	6.6	(\$78,897)	(\$193,368)	(\$139,989)	0.4	0,6	(\$114,472)	(\$61,092)
CZ16-2.	LADWP =	-88,966	6185	6.6	(\$78,897)	\$36,354	(\$139,989)	>1	0.6	\$115,250	(\$61,092)

Figure 60. Cost Effectiveness for Medium Office - All-Electric + 135kW PV

					css for meann			,			
						.,		B/C			*
-		Elec	Gas	GHG	,	Lifecycle	Lifecycle	Ratio	B/C	. :	,
		Savings	Savings	savings	Incremental	Energy Cost	TDV	(On-	Ratio	NPV (On-	NPV
CZ.	IOU territory	(kWh)	(therms)	(tons)	Package Cost	Savings	Savings	pill)	(TDV)	bill)	(TDV)
All-Elect	tric + 135kW PV	No. Vijekaji					14 may 200 189 / 199 / 199 / 199 / 199 / 199 / 199 / 199 / 199 / 199 / 199 / 199 / 199 / 199 / 199 / 199 / 199		4. Jan 194		
CZ01	PG&E	123,683	4967	44.5	\$163,217	\$405,731	\$321,979	2.5	2.0	\$242,514	\$158,762
CZ02	PG&E'	165,627	3868	46.6	\$176,775	\$562,528	\$430,276	3.2	2.4	\$385,753	\$253,501
CZ03	PG&E	173,831	3142	46.3	\$168,140	\$575,864	\$420,205	3.4	2.5	\$407,725	\$252,066
CZ04	PG&E	178,706	3759	48.7	\$181,458	\$601,431	\$456,861	3.3	2.5	\$419,973	\$275,403
CZ04-2	CPAU	178,706	3759	48.7	\$181,458	\$517,526	\$456,861	2.9	2.5	\$336,069	\$275,403
CZ05	PG&E	185,664	3240	48.6	\$165,967	\$664,842	\$446,600	4.0	2.7	\$498,875	\$280,633
CZ06	SCE	192,214	2117	45.3	\$174,317	\$423,657	\$471,944	2.4	2.7	\$249,340	\$297,626
CZ06-2	LADWP	192,214	2117	45.3	\$174,317	\$259,270	\$471,944	1.5	2.7	\$84,953	\$297,626
CZ07	SDG&E	210,282	950	44.3	\$180,145	\$669,979	\$485,260	3.7	2.7	\$489,834	\$305,115
CZ08	SCË .	201,491	1219	43.5	\$181,696	\$407,277	\$497,622	2.2	2.7	\$225,580	\$315,925
CZ08-2	LADWP	201,491	1219	43.5	\$181,696	\$240,657	\$497,622	1.3	2.7	\$58,960	\$315,925
.CZ09	SCE	200,242 -	1605	45.6	\$187,368	\$408,922	\$491,322	2.2	2.6	\$221,554	\$303,953
CZ09-2	LADWP	200,242	1605	45.6	\$187,368	\$248,452	\$491,322	1.3	2.6	\$61,084	\$303,953
CZ10	SDG&E	189,734	2053	44.7	\$202,568	\$667,551	\$462,111	3:3	2.3	\$464,982	\$259,543
CZ10-2	SCE	189,734	2053	44.7	\$202,568	\$412,659	\$462,111	2.0	2.3	\$210,091	\$259,543
. CZ11	PG&E	171,399	3062	44.5	\$186,483	\$597,807	\$446,074	3.2	2.4	\$411,324	\$259,592
CZ12	PG&E	168,413	3327	45.0	\$182,127	\$571,758	\$442,638	3.1	2.4	\$389,632	\$260,511
CZ12-2	SMUD	168,413	3327	45.0	\$182,127	\$343,602	\$442,638	1.9	2.4	\$161,475	\$260,511
CZ13	PG&E	168,817	3063	44.3	\$187,744	\$581,964	\$430,324	3.1	2.3	\$394,220	\$242,580
CZ14	SDG&E	197,643	3266	50.1	\$185,314	\$667,762	\$527,930	3.6	2.8	\$482,449	\$342,616
CZ14-2	SCE	197,643	3266	50.1	\$185,314	\$408,424	\$527,930	- 2.2	2.8	\$223,110	\$342,616
CZ15	SCE	209,539	1537	45.7	\$214,294	\$390,267	\$504,638	1.8	2.4	\$175,972	\$290,343
CZ16 ·	PG&E	135,255	6185	50.4	\$186,374	\$470,199	\$338,637	2.5	1.8	\$283,825	\$152,263
CZ16-2	LADWP	135,255	6185	50.4	\$186,374	\$250,807	\$338,637	1.3	1.8	\$64,433	\$152,263

Figure 61. Cost Effectiveness for Medium Office - All-Electric + 135kW PV + 50 kWh Battery

· · · · · · · · · · · · · · · · · · ·	· · · · · · · · · · · · · · · · · · ·		i a na maintair ann ai g	2.000	cumm onice		C. L. L.O. DAKEE,		Y VIII DIL	<u></u>	
		,			i ta			B/C			
		Elec	Gas	GHG		Lifecycle	Lifecycle	Ratio	B/C		
		Savings	Savings	savings	Incremental	Energy Cost	TDV	(On-	Ratio	NPV (On-	NPV
CZ	IOU territory	(kWh)	(therms)	(tons)	Package Cost	Savings	Savings	bill)	(TDV)	bill)	(TDV)
All-Elect	ric + 135kW-PV	+50 kWh Ba	ttery								
CZ01	PG&E	123,280	4967	45.4	\$191,117	\$404,994	\$323,077	2.1	1.7	\$213,877	\$131,960
CZ02	PG&E	165,200	3868	47,7	\$204,675	\$561,747	\$431,469	2.7	2.1	\$357,072	\$226,795
CZ03	PG&E	173,384	3142	47.4	\$196,040	\$575,043	\$422,019	2.9	2.2	\$379,003	\$225,979
CZ04	PG&E	178,259	- 3759	49.8	\$209,358	\$600,621	\$461,634	2.9	2.2	\$391,263	\$252,276
CZ04-2	CPAU	178,259	3759	49.8	\$209,358	\$516,495	\$461,634	2.5.	2,2	\$307,137	\$252,276
CZ05	PG&E	185,229	3240	49.7	\$193,867	\$664,046	\$447,793	3.4	75 2.3×	*\$470,179°	\$253,926
.CZ06	SCE	191,767	2117	46.5	\$202,217	\$423,369	\$473,519	2.1	2.3	\$221,152	\$271,301
CZ06-2	LADWP	191,767	2117	46,5	\$202,217	\$259,033	\$473,519	1.3	2.3	\$56,816	\$271,301
CZ07	SDG&E	209,848	950	45.4	\$208,045	\$675,307	\$486,787	3.2	2,3	\$467,262	\$278,743
CZ08	SCE	201,047	1219	44.7	\$209,596	\$407,027	\$498,910	1.9	2.4	\$197,430	\$289,314
CZ08-2	LADWP	201,047	1219	44.7	\$209,596	\$240,432	\$498,910	11	2.4	\$30,835	\$289,314
CZ09	SCE	199,802	1605	46.6	\$215,268	\$408,676	\$492,515	1.9	2.3	\$193,408	\$277,246
CZ09-2	LADWP	199,802	1605	46.6	\$215,268	\$248,242	\$492,515	1.2	2.3	\$32,974	\$277,246
CZ10	SDG&E.	189,293	2053	45.7	\$230,468	\$672,867	\$463,352	2.9	2.0	\$442,399	\$232,884
CZ10-2	SCE	189,293	2053	45.7	\$230,468	\$412,412	\$463,352	1.8	2.0	\$181,944	\$232,884
CZ11	PG&E	170,987	3062	45.5	\$214,383	\$597,062	\$448,509	2.8	2.1	\$382,680	\$234,126
CZ12	PG&E	167,995	3327	46.0	\$210,027	\$571,002	\$447,411	2.7	2.1	\$360,975	\$237,384
CZ12-2	SMUD	167,995	3327	46.0	\$210,027	\$343,043	\$447,411	1.6	2.1	\$133,017	\$237,384
CZ13	PG&E	168,408	3063	45.3	\$215,644	\$581,225	\$440,920	2.7	Jan 2.0.	\$365,580	\$225,275
CZ14	SDG&E	197,188	3266	51.2	\$213,214	\$680,893	\$531,080	3:2	2.5	\$467,679	\$317,866
CZ14-2	SCE	197,188	3266	51.2	\$213,214	\$408,166	\$531,080	√1.9.	2.5″	- \$194,952	\$317,866
CZ15	SCE	209,148	1537	46.6	\$242,194	\$390,000	\$506,499	1.6	- 2.1	\$147,806	\$264;305
CZ16	PG&E	134,809	6185	51.4	.\$214,274	\$469,378	\$341,978	2.2	1.6	\$255,105	\$127,704
CZ16-2	LADWP	134,809	6185	51.4	\$214,274	\$250,580	\$341,978	1.2	1.6	\$36,306	\$127,704



6.7.2 Cost Effectiveness Results - Medium Retail

Figure 62 through Figure 69 contain the cost-effectiveness findings for the Medium Retail packages. Notable findings for each package include:

- * Mixed-Fuel + 3 kW PV: Packages are cost effective and achieve savings for all climate zones using the On-Bill and TDV approaches.
- ♦ Mixed-Fuel + 3 kW PV + 5 kWh Battery: The packages are less cost effective as compared to the 3 kW PV only package and not cost effective for LADWP and SMUD service area.
- Mixed-Fuel + PV only: Packages achieve positive energy cost savings and are cost effective using the On-Bill approach for all climate zones except for LADWP territory (CZs 6, 8, 9 and 16). Packages achieve positive savings and are cost effective using the TDV approach for all climate zones.
- Mixed Fuel + PV + 5 kWh Battery: Adding battery slightly reduces On-Bill B/C ratios but is still cost effective for all climate zones except for LADWP territory. Packages achieve savings and cost effective using the TDV approach for all climate zones.
- ♦ All-Electric + 3 kW PV: Packages are cost effective using the On-Bill and TDV approach for all climate zones except for CZ16 under PG&E service.
- * All-Electric + 3 kW PV + 5 kWh Battery: Similar to minimal PV only package, adding battery is cost effective as well using the On-Bill and TDV approach for all climate zones except for CZ16 under PG&E service.
- * All-Electric + PV only: Packages are cost effective and achieve savings in all climate zones for both the On-Bill and TDV approaches
- All-Electric + PV + 50 kWh Battery: Adding battery slightly reduces B/C ratios for both the On-Bill and TDV approaches. Packages are not cost effective for all climate zones except CZ6, CZ8 and CZ9 under LADWP service area.



Figure 62. Cost Effectiveness for Medium Retail - Mixed-Fuel + 3kW PV

	<u></u>	rigu	TE OZ. COST		less for Meuit					, , , , , , , , , , , , , , , , , , , 	
		Elec		GHG .		Lifecycle	Lifecycle	B/C	B/C		
1		Savings	Gas Savings	savings	Incremental	Energy Cost	TDV	Ratio	Ratio	NPV.	NPV
CZ	IOU territory	(kWh)	(therms)	(tons)	Package Cost	Savings	Savings	(On-bill)	(TDV)	(On-bill)	(TDV)
Mixed F	uel + 3kW PV		Site of the								
CZ01	PG&E	3,941		0.76	\$5,566	\$12,616	\$8,460	2.3	1.5	\$7,050	\$2,894
CZ02	PG&E	4,685	0	0.91	\$5,566	\$17,635	\$10,262	3.2	1.8	\$12,069	\$4,696
CZ03	PG&E	4,733	.0	0.92	\$5,566	\$15,146	\$10,152	2:7	1.8	\$9,580	\$4,586
CZ04	PG&E	4,834	0	0.94	\$5,566	\$18,519	\$10,614	3.3	1.9	\$12,953	\$5,048
CZ04-2	CPAU	4,834		0.94	\$5,566	\$11,507	\$10,614	2.1	1.9	\$5,941	\$5,048
CZ05	PG&E	4,910	0	0.95	\$5,566	\$15,641	\$10,548	2.8	1.9	\$10,075	\$4,982
CZ06	SCE	4,769	0	0.93	\$5,566	\$11,374	\$10,724	2:0	1.9	\$5,808	\$5,158
CZ06-2	LA	4,769		0.93	\$5,566	\$7,069	\$10,724	1.3	1,9	\$1,503	\$5,158
CZ07	SDG&E	4,960	. 0	0.96	\$5,566	\$22,452	\$11,031	4.0	2.0	\$16,886	\$5,465
CZ08	SCE	4,826	. 0	0.93	\$5,566	\$11,838	\$11,339	2.1	2.0	\$6,272	\$5,773
CZ08-2	LA	4,826	0	0.93	\$5,566	\$7,342	\$11,339	1.3	2.0	\$1,776	\$5,773
CZ09	SCE	4,889	.0	0.96	\$5,566	\$11,187	\$11,229	2.0	2.0	\$5,621	\$5,663
CZ09-2	LA	4,889	0	0.96	\$5,566	\$6,728	\$11,229	1.2	2.0	\$1,162	\$5,663
CZ10	SDG&E	4,948	0	0.97	\$5,566	\$20,999	\$10,987	3.8	2.0	\$15,433	\$5,421
CZ10-2	SCE	4,948	.01	0.97	\$5,566	\$11,384	\$10,987	2.0	2.0	\$5,818	\$5,421
CZ11	PG&E	4,718	0	0.91	\$5,566	\$15,381	\$10,680	2.8	1.9	\$9,815	\$5,114
CZ12	PG&E	4,707	0	0.91	\$5,566	\$16,442	\$10,614	3.0	1.9	\$10,876	\$5,048
CZ12-2	SMUD	4,707	.0.	0.91	\$5,566	\$8,247	\$10,614	**1.5	1.9	\$2,681	\$5,048
CZ13	PG&E	4,750		0.92	\$5,566	\$16,638	\$10,592	3.0	1.9	\$11,072	\$5,026
CZ14	SDG&E	5,258	0	1.01	\$5,566	\$19,576	\$12,218	3.5	2.2	\$14,010	\$6,652
CZ14-2	SCE .	5,258	٥	1,01	\$5,566	\$10,227	\$12,218	1.8	2:2	\$4,661	\$6,652
CZ15	. SCE:	4,997	0	0.96	\$5,566	\$10,476	\$11,339	1.9	2.0	\$4,910	\$5,773
CZ16	PG&E	5,336	.0.	1.04	\$5,566	\$20,418.	\$11,361	3:7-	2.0	\$14,852	\$5,795
CZ16-2	LA	5,336	0	1.04	\$5,566	\$6,987	\$11,361	1.3	2.0'	\$1,421	\$5,795

Figure 63. Cost Effectiveness for Medium Retail - Mixed Fuel + 3kW PV + 5 kWh Battery

		Elec		GHG	Medium Retai	Lifecycle		B/C	B/C		
•	,	Savings	Gas Savings	savings	Incremental	Energy Cost	\$-TDV	Ratio	Ratio	NPV (On-	- NPV
cz	IOU territory	(kWh)	(therms)	(tons)	Package Cost	Savings	Savings	(On-bill)	(TDV)	bill)	(TDV)
Mixed F	uel + 3kW PV +	5 kWh Batter	ý								
CZ01	PG&E	3,941	0	0.76	\$9,520	\$12,616	\$8,460	1.3	0.9	\$3,096	(\$1,060)
CZ02 ·	PG&E	4,685	0	0.91	\$9,520	\$17,635	\$10,262	1.9	1.1	\$8,115	\$7.42
CZ03	PG&E	4,733	0:	0.92	\$9,520	\$15,146	\$10,152	1.6	1.1	\$5,626	\$632
CZ04	PG&E	4,834	. 0	0.94	\$9,520	\$18,519	\$10,614	1.9	1.1	\$8,999	\$1,094
CZ04-2	CPAU	4,834	. 0	0.94	\$9,520	\$11,507	\$10,614	1.2	1.1	\$1,987	\$1,094
CZ05	PG&E	4,910	, 0	0.95	\$9,520	\$15,641	\$10,548	1.6	1.1	\$6,120	\$1,028
CZ05-2	SCG	4,910	0	0.95	\$9,520	\$15,641	\$10,548	1.6	1.1	\$6,120	\$1,028
CZ06	SCE	4,769	0	0.93	\$9,520	\$11,374	\$10,724	1.2	1.1	\$1,854	\$1,204
CZ06-2	LA ·	4,769	. 0	0.93	\$9,520	\$7,069	\$10,724	0.7	1.1	(\$2,452)	\$1,204
CZ07	SDG&E	4,960	0	0.96	\$9,520	\$22,452	\$11,031	2.4	1.2	\$12,932	\$1,511
CZ08	SCE	4,826	0	0.93	\$9,520	\$11,838	\$11,339	1.2	1.2	\$2,317	\$1,819
CZ08-2	LA	4,826	0	0,93	\$9,520	\$7,342	\$11,339	0.8	1.2	(\$2,178)	\$1,819
CZ09	SCE	4,889	0	0.96	\$9,520	\$11,187	\$11,229	1.2	1.2	\$1,667	\$1,709
CZ09-2	LA	4,889	0.	0.96	\$9,520	\$6,728	\$11,229	. 0.7	1.2	(\$2,792)	\$1,709
CZ10	SDG&E	4,948	. 0	₹ 0.97	\$9,520	\$20,999	\$10,987	2.2	1.2	\$11,479	\$1,467
CZ10-2	SCE	4,948	0	0.97	\$9,520	\$11,384	\$10,987	1.2	1.2	\$1,863	\$1,467
CZ11	PG&E	4,718	. 0	0.91	\$9,520	\$15,381	\$10,680	1.6	1.1	\$5,861	\$1,160
CZ12	PG&E	4,707	0.	0.91	\$9,520	\$16,442	\$10,614	1.7	1.1	\$6,922	\$1,094
CZ12-2	SMUD	4,707	. 0	0.91	\$9,520	\$8,247	\$10,614	0.9	1.1	(\$1,273)	\$1,094
·CZ13	PG&E	4,750	.0	0.92	\$9,520:	\$16,638	\$10,592	1.7	1.1	\$7,117	\$1,072
CZ14	SDG&E	5,258	0	1.01	\$9,520	\$19,576	\$12,218	2.1	1.3	\$10,056	\$2,698
CZ14-2	SCE	5,258	0	1.01	\$9,520	\$10,227	\$12,218	1.1	1.3	\$7.07	\$2,698
CZ15	SCE	4,997	, O	0.96	\$9,520	\$10,476	\$11,339	1.1	1.2	\$956	\$1,819
CZ16	PG&E	5,336	0	1.04	\$9,520	\$20,418	\$11,361	2.1	1.2	\$10,898	\$1,841
CZ16-2	LA	5,336	0	1.04	\$9,520	\$6,987	\$11,361	0.7	1.2	(\$2,533)	\$1,841



Figure 64. Cost Effectiveness for Medium Retail - Mixed-Fuel + 110kW PV

	:	Elec	Gas	GHG	ess for Mediu	Lifecycle	Lifecycle	B/C	B/C		
	7	Savings	Savings	savings	Incremental	Energy Cost	TDV	Ratio	Ratio	NPV (On-	NPV
CZ -	IOU territory	(kWh)	(therms)	(tons)	Package Cost	Savings	Savings	(On-bill)	(TDV)	bill)	(TDV)
Mixed F	uel + 110kW PV										
CZ01	PG&E	144,499	. 0	27.97	\$201,904	\$454,462	\$309,935	2.3	1.5	÷\$252,558÷	\$108,031
CZ02	PG&E	171,790	.0	33.31 -	\$201,904	\$477,584	\$376,300	2.4	1.9	\$275,681	\$174,396
CZ03	PG&E	173,534	0	33.55	\$201,904	\$538,530	\$372,146	2.7	1:8	\$336,626	\$170,243
CZ04	PG&E	177,229	0	34.42	\$201,904	\$489,934	\$389,067	2.4	1.9	\$288,030 × 5288	\$187,163
CZ04-2	CPAU:	177,229	0	34.42	\$201,904	\$418,173	\$389,067	2.1	1.9	\$216,269	\$187,163
CZ05	PG&E	180,044	0	34.84	\$201,904	\$556,787	\$386,958	2.8	1.9	\$354,883	\$185,054
CZ06	SCE	174,855	0	33.92	\$201,904	\$288,188	\$393,198	1,4	1.9	\$86,284	\$191,295
CZ06-2	LA	174,855	0	33.92	\$201,904	\$165,538	\$393,198	0.8	- 1.9-	(\$36,366)	\$191,295
CZ07	SDG&E	181,854	0	35.32	\$201,904	\$373,974	\$404,713	1.9	2.0	\$172,070	\$202,809
CZ08	SCE	176,954	0	34.23	\$201,904	\$284,481	\$415,789	1.4	2.1	\$82,577	\$213,885
CZ08-2	LA	176,954	0 -	34.23	\$201,904	\$161,366	\$415,789	8.0	2.1	(\$40,538)	\$213,885
CZ09	SCE	179,267	0.	35.18	\$201,904	\$289,050	\$412,097	1.4	2.0	\$87,146	\$210,193
CZ09-2	LA	179,267	0	35.18	\$201,904	\$168,822	\$412,097	0:8	2.0	(\$33,082)	\$210,193
CZ10	SDG&E	181,443	0	35.41	\$201,904	\$410,310	\$402,999	2:0	2.0	\$208,406	\$201,095
CZ10-2	SCE	181,443	0	35.41	\$201,904	\$291,236	\$402,999	1.4	2.0	-\$89,332	\$201,095
CZ11	PG&E	172,983	.0	33.46	\$201,904	\$464,776	\$391,550	2.3	1.9	\$262,872	\$189,646
CZ12	PG&E	172,597	0	33,33	\$201,904	\$467,870	\$389,573	2.3	1.9	\$265,966	\$187,669
CZ12-2	SMUD	172,597	- 0	33.33	\$201,904	\$267,086	\$389,573	1.3	1.9	\$65,182	\$187,669
CZ13	PG&E	174,151	0.	33.81	\$201,904	\$478,857	\$387,968	2.4	1.9	\$276,953	\$186,065
CZ14	SDG&E	192,789	0 ,	36.97	\$201,904	\$396,181	\$448,268	2.0	2.2	\$194,277	\$246,364
CZ14-2	SCE	192,789	0.	36.97	\$201,904	\$288,782	\$448,268	1.4	2.2	\$86,878	\$246,364
CZ15	SCE	183,214	0.	35.12	\$201,904	\$277,867	\$415,789	1.4	2.1	\$75;963	\$213,885
CZ16	PG&E	195,665	0′	37.97	\$201,904	\$522,352	\$416,558	2.6	2,1	\$320,448	\$214,654
CZ16-2 :	LA	195,665	0	37:97	\$201,904	\$171,802	\$416,558	0.9	2,1	(\$30,101)	\$214,654

Figure 65. Cost Effectiveness for Medium Retail - Mixed-Fuel + 110 kW PV + 50 kWh Battery

	1 1511	Elec	Gas	GHG	eutum Ketan -	Lifecycle	Lifecycle	B/C	B/C		
		Savings	Savings	savings	Incremental	Energy Cost	TDV	Ratio	Ratio	NPV (On-	NP.V
CZ-	IOU territory	(kWh)	(therms)	(tons)	Package Cost	Savings	Savings	(On-bill)	(TDV)	bill)	(TDV)
	uel + 110kW PV							NAME OF	re Wartis		
CZ01	PG&E	143,423	0	29.48	\$229,804	\$452,119	\$324,373	2.0	1.4	\$222,315	\$94,569
CZ02	PG&E	170,542	0	35.14	\$229,804	\$486,704	\$398,363	2.1	1.7	\$256,900	\$168,559
CZ03	PG&E	172,266	0	35.66	\$229,804	\$535,974	\$395,374	2.3	1.7	\$306,170	\$165,570
CZ04	PG&E:	175,940	0	36.32	\$229,804	\$525,788	\$422,579	2.3	1.8	\$295,984	\$192,775
CZ04-2	CPAU	175,940	0	36.32	\$229,804	\$416,019	\$422,579	1.8	1.8	\$186,216	\$192,775
CZ05	PG&E	178,728	0	36.91	\$229,804	\$554,968	\$409,086	2.4	1.8	- 164ر\$32\$	\$179,283
CZ06	SCE	173,567	. 0	35.99	\$229,804	\$290,599	\$412,690	1.3	1.8	\$60,795	\$182,886
CZ06-2	LA.	173,567	0	35.99	\$229,804	\$169,786	\$412,690	0.7	1.8	(\$60,018)	\$182,886
CZ07	SDG&E	180,508	0	37.61	\$229,804	\$425,793	\$427,040	1.9	1.9	\$195,989	\$197,236
CZ08	SCE	175,616	0	36.29	\$229,804	\$296,318	\$434,687	1,3	1.9	\$66,514	\$204,883
CZ08-2	LA	175,616	0	36.29	\$229,804	\$170,489	\$434,687	0.7	1.9	(\$59,315)	\$204,883
CZ09	SCE	177,966	0	36.74	\$229,804	\$300,540	\$421,195	1.3	1.8	\$70,736	\$191,391
CZ09-2	LA	177,966	0	36.74	\$229,804	\$178,852	\$421,195	8.0	1.8	(\$50,952)	\$191,391
CZ10	SDG&E.	180,248	± . 0	36.91	\$229,804	\$459,486	\$410,537	2.0	1.8	\$229,683	\$180,733
CZ10-2	SCE	180,248	0	36.91	\$229,804	\$301,219	\$410,537	1.3	1.8	\$71,415	\$180,733
CZ11	PG&E	171,779	0	34.85	\$229,804	\$490,245	\$417,679	2.1	1.8	\$260,442	\$187,875
CZ12	PG&E	171,392	0	34.77	\$229,804	\$497,363	\$417,371	2.2	1.8	\$267,559	\$187,567
CZ12-2	SMUD	171,392	0	34.77	\$229,804	\$273,783	\$417,371	1.2	1.8	\$43,979	\$187,567
CZ13	PG&E	173,052	0	34.97	\$229,804	\$488,196	\$397,791	2.1	1.7	\$258,392	\$167,987
CZ14	SDG&E	191,703	0	38.31	\$229,804	\$420,241	\$452,641	1.8	2.0	\$190,437	\$222,837
CZ14-2	SCE	191,703	0	38.31	\$229,804	\$294,010	\$452,641	1.3	2.0	\$64,206	\$222,837
CZ15	SCE	182,299	, O	36.01	\$229,804	\$279,036	\$416,382	1.2	1.8	\$49,232	\$186,578
CZ16	PG&E	194,293	0.	40.00	\$229,804	\$535,137	\$432,951	2.3	1.9	\$305,333	\$203,147
. CZ16-2	LA	194,293	0	40.00	\$229,804	\$175,573	\$432,951	0.8	1.9	(\$54,231)	\$203,147

Figure 66. Cost Effectiveness for Medium Retail - All-Electric + 3kW PV

			7.7		MUSS 101 MU		T	D/C	1		
			<u></u>	6116		175.00.01	Yorkson sala	B/C	n/c		
		Elec	Gas	GHG	Maria de Caración	Lifecycle	Lifecycle	Ratio	B/C	NDV//O	ATPAN
67	10115	Savings	Savings	savings	Incremental	Energy Cost	TDV	(On-	Ratio	NPV (On-	NPV
CZ	IOU territory	(kWh)	(therms)	(tons)	Package Cost	Savings	Savings	bill)	(TDV)	bill)	(TDV)
	ric + 3kW PV										
CZ01	PG&E	-25,214	3893	14.61	(\$16,318)	\$4,288	(\$5,450)	>1	3.0	\$20,606	\$10,868
CZ02	PG&E	-17,101	2448	8.40	(\$20,734)	\$859	\$5,779	>1	>1	\$21,593	\$26,513
CZ03	PG&E	-9,851	1868	7.18	(\$17,381)	\$15,418	\$8,702		>1	\$32,799	\$26,083
CZ04	PG&E	-9,353	1706	6.24*	(\$16,166)	\$9,110	\$10,394	51	>1	\$25,276	\$26,560
CZ04-2	CPAU	-9,353	1706	6.24	(\$16,166)	\$24,000	\$10,394	>1	>1	* \$40,166	\$26,560
CZ05	PG&E	-9,423	1746	6.42	(\$18,776)	\$14,076	\$6,351	/////>1	>1	\$32,852	\$25,127
CZ06	SCE	-2,759	1002	4.24	(\$15,032)	\$29,710	\$12,592	51	>1	\$44,741	\$27,623
CZ06-2	LA	-2,759	1002	4,24	(\$15,032)	\$26,292	\$12,592	>1	>1	\$41,324	\$27,623
CZ07	SDG&E:	1,148	522	2.72	(\$17,032)	\$76,810	\$12,350	>1	>1	\$93,842	\$29,382
CZ08	SCE.	-979	793	3.64	(\$20,192)	\$28,576	\$13,185	12.5	>1	\$48,768	\$33,377
CZ08-2	-LA	-979	7.93	3.64	(\$20,192)	\$24,475	\$13,185	>1	>1	\$44,667	\$33,377
CZ09	SCE	-2,352	970	4.28	(\$25,383)	\$29,776	\$13,207	>1	>1	\$55,159	\$38,590
CZ09-2	LA -	-2,352	970.	4.28	(\$25,383)	\$25,823	\$13,207		\$1	\$51,207	\$38,590
CZ10	SDG&E	-5,388	1262	4.95	(\$20,541)	\$75,458	\$11,493	51	>1	÷ \$95,999	\$32,034
CZ10-2	SCE	-5,388	1262	4.95	(\$20,541)	\$32,394	\$11,493	:-::>1	// >1	\$52,936	\$32,034
CZ11	PG&E	-14,533	2415	8.86	(\$25,471)	\$7,618	\$13,295	>1	>1	\$33,090	\$38,766
CZ12	PG&E	-14,764	2309	8.19	(\$25,774)	\$2,210	\$10,152	>1	>1	\$27,984	\$35,926
CZ12-2	SMUD'	-14,764	2309	8.19	(\$25,774)	\$21,215	\$10,152	>1	2 ≥1	\$46,988	\$35,926
CZ13	PG&E	-12,069	1983	7.08	(\$21,428)	\$5,647	\$8,570	·. >1	>1	\$27,075	\$29,998
CZ14	SDG&E	-7;950	1672	6.45	(\$19,926)	\$60,412	\$16,679	1-	<u>.</u> ; >1	\$80,338	\$36,605
CZ14-2	SCE	-7,950	1672	6.45	(\$19,926)	\$28,631	\$16,679	>1	+/***>1	\$48,557	\$36,605
CZ15.	SCE	2,534	518	3.10	(\$22,813)	\$27,271	\$17,162] 		\$50,084	\$39,976
CZ16	PG&E	-36,081	4304	14.26	(\$19,041)	(\$30,111)	(\$41,181)	0.6	0.5	(\$11,070)	(\$22,140)
CZ16-2	LÄ	-36,081	4304	14.26	(\$19,041)	\$45,706	(\$41,181)	>1.	-0,-5	\$64,747	(\$22,140)



Figure 67. Cost Effectiveness for Medium Retail - All-Electric + 3kW PV + 5 kWh Battery

		Elec	Gas	GHG	Heurum Reta	Lifecycle	- '	B/C Ratio	B/C		
		Savings	Savings	savings	Incremental	Energy Cost	\$-TDV	(On-	Ratio	NPV (On-	NPV
CZ	10U territory	(kWh)	(therms)	(tons)	Package Cost	Savings	Savings	bill)	(TDV)	bill)	(TDV)
All-Elect	tric + 3kW PV + 1	kWh Batter		拉马克斯	944 E948 E868 E868 E868 E868 E868 E868 E868 E8			Hardaliga.			14 - 12/4/19
CZ01	PG&E	-25,214	3893	14.61	(\$14,692)	\$4,288	(\$5,450)	>1	2.7	\$18,980	\$9,242
CZ02	PG&E	-17,101	2448	8.40	(\$14,692)	\$859	\$5,779	>1	>1	\$15,551	\$20,472
CZ03	PG&E	-9,851	1868	7.18	(\$14,692)	\$15,418	\$8,702	>1	>1	\$30,110	\$23,394
CZ04	PG&E	-9,353	1706	6.24	(\$14,692)	\$9,110	\$10,394	>1	>1	\$23,802	\$25,086
CZ04-2	CPAU	-9,353	1706	6.24	(\$14,692)	\$24,000	\$10,394	>1	>1	\$38,693	\$25,086
CZ05	PG&E	-9,423	1746	6.42	(\$14,692)	\$14,076	\$6,351	>1	>1	\$28,768	\$21,043
CZ06	SCE	-2,759	1002	4.24	(\$14,692)	\$29,710	\$12,592	>1-	>1	\$44,402	\$27,284
CZ06-2	LA	-2,759	1002	4.24	(\$14,692)	\$26,292	\$12,592	>1	:>1	\$40,984	\$27,284
CZ07	SDG&E	1,148	522	2.72	(\$14,692)	\$76,810	\$12,350	>1	>1	\$91,502	\$27,042
CZ08	SCE	-979	793	3,64	(\$14,692)	\$28,576	\$13,185	>1	>1	\$43,268	\$27,877
CZ08-2	LA	-979	793	3.64	(\$14,692)	\$24,475	\$13,185	>1	>1	\$39,167	\$27,877
CZ09	SCE	-2,352	970	4.28	(\$14,692)	\$29,776	\$13,207	>1	>1	\$44,468	\$27,899
CZ09-2	LA	-2,352	970	4.28	(\$14,692)	\$25,823	\$13,207	>1	>1	\$40,516	\$27,899
CZ10	SDG&E	-5,388	1262	4.95	(\$14,692)	\$75,458	\$11,493	>1	>1	\$90,150	\$26,185
CZ10-2	SCE:	-5,388	1262	4.95	(\$14,692)	\$32,394	\$11,493	>1	>1	\$47,086	\$26,185
CZ11	PG&E	-14,533	2415	8.86	(\$14,692)	\$7,618	\$13,295	>1	>1	\$22,310	\$27,987
CZ12	PG&E	-14,764	2309	8.19	(\$14,692)	\$2,210	\$10,152	>1	>1	\$16,902	\$24,845
CZ12-2	SMUD	-14,764	2309	8.19	(\$14,692)	\$21,215	\$10,152	>1	>1	\$35,907	\$24,845
CZ13	PG&E	-12,069	1983	7.08	(\$14,692)	\$5,647	\$8,570	>1	>1	\$20,339	\$23,262
CZ14	SDG&E	-7,950	1672	6.45	(\$14,692)	\$60,412	\$16,679	: (*)>1	>1	\$75,104	\$31,371
CZ14-2	SCE	-7,950	1672	6.45	(\$14,692)	\$28,631	\$16,679	>1	>1	\$43,323	\$31,371
CZ15	SCE	2,534	518	3.10	(\$14,692)	\$27,271	\$17,162	>1	>1	\$41,963	\$31,855
CZ16	PG&E	-36,081	4304	14.26	(\$14,692)	(\$30,111)	(\$41,181)	0.5	0.4	(\$15,419)	(\$26,489)
CZ16-2	LA .	-36,081	4304	14.26	(\$14,692)	\$45,706	(\$41,181)	>1	0.4	\$60,398	(\$26,489)

Figure 68. Cost Effectiveness for Medium Retail – All-Electric + 110kW PV

			C. OO. GODE I		a:	4.		B/C			
	.*	Elec	Gas	GHG		Lifecycle	Lifecycle	Ratio	B/C		
		Savings	Savings	savings	Incremental	Energy Cost	TDV	(On-	Ratio	NPV (On-	NPV
CZ	10U territory	(kWh)	(therms)	(tons)	Package Cost	Savings	Savings	bill)	(TDV)	bill)	(TDV)
All-Elect	ric + 110kW PV										
CZ01	PG&E	115,344	3893	41.82	\$143,932	\$454,277	\$296,025	3.2	2.1	\$310,345	\$152,093
CZ02	PG&E	150,004	2448	40.80	\$139,516	\$470,236	\$371,817	3.4	2.7	\$330,720	\$232,301
CZ03	PG&E	158,951	1868	39.82	\$142,869	\$544,095	\$370,696	3.8	2.6	\$401,226	\$227,827
CZ04	PG&E	163,043	1706	39.73	\$144,084	\$488,619	\$388,847	-3.4	2.7	\$344,534	\$244,763
CZ04-2	CPAU	163,043	1706	39. <i>7</i> 3	\$144,084	\$432,905	\$388,847	≝ ₹3.0	2.7	-\$288,821	\$244,763
CZ05	PG&E	165,711	1746	40.30	\$141,473	\$565,525	\$382,760	4.0	2.7	\$424,051	\$241,287
CZ06	SCE:	167,328	1002	37.24	\$145,218	\$306,670	\$395,066	2.1	2.7	\$161,452	\$249,848
CZ06-2	LÀ ·	167,328	1002	37.24	\$145,218_	\$184,797	\$395,066	1.3	2.7	\$39,579	\$249,848
CZ07	SDG&E	178,042	522	37.07	\$143,218	\$428,332	\$406,032	3.0	2,8	\$285,114	\$262,814
CZ08	SCE:	171,149	793	36.94	\$140,058	\$301,219	\$417,635	2.2	3.0	\$161,161	\$277,577
CZ08-2	ĹA	171,149	793	36.94	\$140,058	\$178,419	\$417,635	1.3	3.0	\$38,361	\$277,577
CZ09	SCE	172,027	970	38.50	\$134,867	\$307,640	\$414,075	2.3	3.1	\$172,773	\$279,208
CZ09-2	LA:	172,027	970	38.50	\$134,867	\$187,813	\$414,075	1.4	3.1	\$52,946	\$279,208
CZ10	SDG&E	171,107	1262	39.40	\$139,708	\$463,692	\$403,505	3.3	2.9	\$323,984	\$263,796
CZ10-2	SCE	171,107	1262	39.40	\$139,708	\$311,464	\$403,505	2,2	2.9	\$171,755	\$263,796
CZ11	PG&E	153,732	2415	41.41	\$134,778	\$467,356	\$394,165	3.5	-≠° ∵ 2.9	\$332,578	\$259,387
CZ12	PG&E	153,126	2309	40.61	\$134,476	\$467,106	\$389,111	3.5	2.9	\$332,630	\$254,635
CZ12-2	SMUD	153,126	2309	40.61	\$134,476	\$283,343	\$389,111	2.1	2.9	\$148,867	\$254,635
CZ13	PG&E	157,332	1983	39.97	\$138,822	\$477,831	\$385,947	3.4	2.8	\$339,008	\$247,124
CZ14 -	SDG&E	179,582	1672	42.42	\$140,324	\$437,575	\$452,729	3.1	3.2	\$297,251	\$312,405
CZ14-2	SCE	179,582	1672	42.42	\$140,324	\$309,064	\$452,729	2.2	3.2	-\$168,740	\$312,405
CZ15.	SCE	180,751	518	37.26	\$137,436	\$294,877	\$421,612	2.1	3.1	\$157,440	\$284,176
CZ16	PG&E	154,248	4304	51.20	\$141,209	\$473,892	\$364,016	3.4	2.6	\$332,682	\$222,807
CZ16-2	LA.	154,248	4304	51.20	\$141,209	\$211,677	\$364,016	1.5	2.6	\$70,467	\$222,807

Figure 69. Cost Effectiveness for Medium Retail - All-Electric + 110kW PV + 50 kWh Battery

Elec Gas Savings Savings Savings Savings (therms) Fackage Cost Savings Savings (therms) Fackage Cost Savings Savings Savings (therms) Fackage Cost Savings Sav		1.64	10071000	C DIXCOUNT CX.	1000 101 1-1	culum relan	TAXT ELECTRIC	C . ZZOXXII	·			
New Note									1	;		
CZ01 PG&E 114,356 3893 43.52 \$171,832 \$451,043 \$310,265 \$2.6 1.8 \$279,211 \$1338,438 \$102,000 \$2.0			Į.		1 1 1 2				1	1		[· `
All-Electric + 90kW-PV + 50 kWh Battery			1					1	, ,		•	
CZ01 PG&E 114,356 3893 43.52 \$171,832 \$451,043 \$310,265 2.6 1.8 \$279,211 \$138,433 CZ02 PG&E 148,793 2448 42.88 \$167,416 \$475,081 \$394,099 2.8 2.4 \$307,664 \$226,563 CZ03 PG&E 157,707 1868 42.12 \$170,769 \$541,418 \$394,094 3.2 2.3 \$370,649 \$223,265 CZ04 PG&E 161,769 1706 41.82 \$171,984 \$523,603 \$422,535 2.5 2.5 \$255,551.818 \$250,551 CZ04-2 CPAU 161,769 1706 41.82 \$171,984 \$430,567 \$422,535 2.5 2.5 \$255,585.82 \$250,551 CZ05 PG&E 164,408 1746 42.68 \$169,373 \$561,966 \$405,087 3.3 2.4 \$392,592 \$235,714 C206-2 LA 166,052 1002 39.48 \$173,118 \$306,967 \$414,756					(tons)	Package Cost	Savings	Savings	bill)	(TDV)	bill)	(TDV)
CZ02 PG&E 148,793 2448 42.89 \$167,416 \$475,081 \$394,099 2.8 2.4 \$307,664 \$226,683 CZ03 PG&E 157,707 1868 42.12 \$170,769 \$541,418 \$394,034 3.2 2.3 \$370,649 \$223,265 CZ04-P PG&E 161,769 1706 41.82 \$171,984 \$523,603 \$422,535 3.0 2.5 \$351,618 \$250,551 CZ04-P CPAU 161,769 1706 41.82 \$171,984 \$430,567 \$422,535 3.0 2.5 \$351,618 \$250,551 CZ05 PG&E 164,408 1746 42.68 \$169,373 \$561,966 \$405,087 3.3 2.4 \$392,592 \$235,714 CZ05 PG&E 166,052 1002 39.48 \$173,118 \$306,697 \$414,756 1.8 2.4 \$133,579 \$224,638 CZ06-2 LA 166,052 1002 39.48 \$173,118 \$414,756 1.8 2.	All-Elec	31403 140 170 170	50 kWh Batt	The state of the s		STEEL STATES						
CZ03 PG&E 157,707 1868 42.12 \$170,769 \$541,418 \$394,034 3.2 2.3 \$370,649 \$223,265 CZ04 PG&E 161,769 1706 41.82 \$171,984 \$523,603 \$422,535 3.0 2.5 \$351,618 \$250,551 CZ04-2 CPAU 161,769 1706 41.82 \$171,984 \$430,567 \$422,535 2.5 \$258,582 \$250,551 CZ05 PG&E 164,408 1746 42.68 \$169,373 \$561,966 \$405,087 3.3 2.4 \$332,592 \$223,5714 CZ05 PG&E 166,052 1002 39.48 \$173,118 \$360,697 \$414,756 1.8 2.4 \$133,579 \$241,638 CZ06 SCE 166,052 1002 39.48 \$173,118 \$187,941 \$414,756 1.1 2.4 \$14,823 \$241,638 CZ07 SDG&E 176,705 522 39.47 \$171,118 \$479,038 \$428,490 2.8	CZ01	PG&E	114,356	3893	43.52	\$171,832	\$451,043	\$310,265	2,6	1.8	\$279,211	\$138,433
CZ04 PG&E 161,769 1706 41.82 \$171,984 \$523,603 \$422,535 3.0 2.5 \$351,618 \$250,551 CZ04-2 CPAU 161,769 1706 41.82 \$371,984 \$430,567 \$422,535 2.5 \$258,582 \$250,551 CZ05 PG&E 164,408 1746 42.68 \$169,373 \$561,966 \$405,087 3.3 2.4 \$392,592 \$235,714 CZ06 SCE 166,052 1002 39.48 \$173,118 \$306,697 \$414,756 1.8 2.4 \$133,579 \$241,638 CZ07 SDG&E 176,705 522 39.47 \$171,118 \$479,038 \$428,490 2.8 2.5 \$307,920 \$2257,372 CZ08 SCE 169,825 793 39.14 \$167,958 \$312,602 \$436,709 1.9 2.6 \$144,643 \$268,751 CZ08 SCE 169,825 793 39.14 \$167,958 \$187,142 \$436,709 1.1 2.6	CZ02	PG&E	148,793	2448		\$167,416	\$475,081			2.4	\$307,664	\$226,683
CZ04-2 CPAU 161,769 1706 41.82 \$171,984 \$430,567 \$422,535 2.5 2.5 \$258,582 \$250,551 CZ05 PG&E 164,408 1746 42.68 \$169,373 \$561,966 \$405,087 3.3 2.4 \$392,592 \$235,714 CZ06 SCE 166,052 1002 39.48 \$173,118 \$306,697 \$414,756 1.8 2.4 \$133,579 \$241,638 CZ07 SDG&E 176,705 522 39.47 \$171,118 \$479,038 \$428,490 2.8 2.5 \$307,920 \$257,372 CZ08 SCE 169,825 793 39.14 \$167,958 \$312,602 \$436,709 1.9 2.6 \$144,645 \$268,751 CZ08-2 LA 169,825 793 39.14 \$167,958 \$187,142 \$436,709 1.1 2.6 \$19,185 \$268,751 CZ09 SCE 170,747 970 40.23 \$162,767 \$318,113 \$423,370 2.0 <td>CZ03</td> <td>PG&E</td> <td>157,707</td> <td>1868</td> <td>42.12</td> <td>\$170,769</td> <td>\$541,418</td> <td>\$394,034</td> <td>3.2</td> <td>2.3</td> <td>\$370,649</td> <td>\$223,265</td>	CZ03	PG&E	157,707	1868	42.12	\$170,769	\$541,418	\$394,034	3.2	2.3	\$370,649	\$223,265
CZO5 PG&E 164,408 1746 42.68 \$169,373 \$561,966 \$405,087 3.3 2.4 \$392,592 \$235,714 CZO6 SCE 166,052 1002 39.48 \$173,118 \$306,697 \$414,756 1.8 2.4 \$133,579 \$241,638 CZO6-2 LA 166,052 1002 39.48 \$173,118 \$187,941 \$414,756 1.1 2.4 \$14,823 \$241,638 CZO7 SDG&E 176,705 522 39.47 \$171,118 \$479,038 \$428,490 2.8 2.5 \$307,920 \$257,372 CZO8 SCE 169,825 793 39.14 \$167,958 \$312,602 \$436,709 1.1 2.6 \$144,645 \$268,751 CZO8-2 LA 169,825 793 39.14 \$167,958 \$187,142 \$436,709 1.1 2.6 \$19,185 \$268,751 CZO9-2 LA 170,747 970 40.23 \$162,767 \$197,006 \$423,370 1.2	CZ04	PG&E	161,769	1706	41.82	\$171,984	\$523,603		3.0	2.5	\$351,618	\$250,551
CZ06 SCE 166,052 1002 39.48 \$173,118 \$306,697 \$414,756 1.8 2.4 \$133,579 \$241,638 CZ06-2 LA 166,052 1002 39.48 \$173,118 \$187,941 \$414,756 1.1 2.4 \$14,823 \$241,638 CZ07 SDG&E 176,705 522 39.47 \$171,118 \$479,038 \$428,490 2.8 2.5 \$307,920 \$257,372 CZ08 SCE 169,825 793 39.14 \$167,958 \$131,2602 \$436,709 1.9 2.6 \$144,645 \$268,751 CZ08-2 LA 169,825 793 39.14 \$167,958 \$187,142 \$436,709 1.1 2.6 \$19,185 \$268,751 CZ09 SCE 170,747 970 40.23 \$162,767 \$318,113 \$423,370 2.0 2.6 \$155,346 \$260,604 CZ10 SDG&E 169,935 1262 41.08 \$167,608 \$317,927 \$411,284 3.0 <td>CZ04-2</td> <td>CPAU</td> <td>161,769</td> <td>1706</td> <td>41.82</td> <td>\$171,984</td> <td>\$430,567</td> <td>\$422,535</td> <td>2.5</td> <td>2.5</td> <td>\$258,582</td> <td>\$250,551</td>	CZ04-2	CPAU	161,769	1706	41.82	\$171,984	\$430,567	\$422,535	2.5	2.5	\$258,582	\$250,551
CZ06-2 LA 166,052 1002 39.48 \$173,118 \$187,941 \$414,756 1.1 2.4 \$14,823 \$241,638 CZ07 SDG&E 176,705 522 39.47 \$171,118 \$479,038 \$428,490 2.8 2.5 \$307,920 \$257,372 CZ08 SCE 169,825 793 39.14 \$167,958 \$312,602 \$436,709 1.9 2.6 \$144,645 \$268,751 CZ08-2 LA 169,825 793 39.14 \$167,958 \$187,142 \$436,709 1.1 2.6 \$19,185 \$268,751 CZ09 SCE 170,747 970 40.23 \$162,767 \$318,113 \$423,370 2.0 2.6 \$155,346 \$260,604 CZ09-2 LA 170,747 970 40.23 \$162,767 \$197,006 \$423,370 1.2 2.6 \$34,240 \$260,604 CZ10-2 SCE 169,935 1262 41.08 \$167,608 \$317,927 \$411,284 3.0	CZ05	PG&E	164,408	1746	42.68	. \$169,373	\$561,966	\$405,087	3.3	2.4	\$392,592	\$235,714
CZ07 SDG&E 176,705 522 39.47 \$171,118 \$479,038 \$428,490 2.8 2.5 \$307,920 \$257,372 CZ08 SCE 169,825 793 39.14 \$167,958 \$312,602 \$436,709 1.9 2.6 \$144,645 \$268,751 CZ08-2 LA 169,825 793 39.14 \$167,958 \$187,142 \$436,709 1.1 2.6 \$19,185 \$268,751 CZ09 SCE 170,747 970 40.23 \$162,767 \$318,113 \$423,370 1.2 2.6 \$34,240 \$260,604 CZ09-2 LA 170,747 970 40.23 \$162,767 \$197,006 \$423,370 1.2 2.6 \$34,240 \$260,604 CZ10-2 SCE 169,935 1262 41.08 \$167,608 \$503,504 \$411,284 3.0 2.5 \$335,896 \$243,675 CZ10-2 SCE 169,935 1262 41.08 \$167,608 \$317,927 \$411,284 1.9	CZ06	SCE	166,052	1002	39.48	\$173,118	\$306,697	\$414,756	1.8	2.4	\$133,579	\$241,638
CZ08 SCE 169,825 793 39.14 \$167,958 \$312,602 \$436,709 1.9 2.6 \$144,645 \$268,751 CZ08-2 LA 169,825 793 39.14 \$167,958 \$187,142 \$436,709 1.1 2.6 \$19,185 \$268,751 CZ09 SCE 170,747 970 40.23 \$162,767 \$197,006 \$423,370 1.2 2.6 \$34,240 \$260,604 CZ09-2 LA 170,747 970 40.23 \$162,767 \$197,006 \$423,370 1.2 2.6 \$34,240 \$260,604 CZ10 SDG&E 169,935 1262 41.08 \$167,608 \$503,504 \$411,284 3:0 2.5 \$335,896 \$243,675 CZ10-2 SCE 169,935 1262 41.08 \$167,608 \$317,927 \$411,284 1.9 2.5 \$150,319 \$243,675 CZ11 PG&E 152,559 2415 42.99 \$162,678 \$491,775 \$420,667 3.0	CZ06-2	LA	166,052	1002	39.48	\$173,118	\$187,941	\$414,756	1.1	2.4	\$14,823	\$241,638
CZ08-2 LA 169,825 793 39.14 \$167,958 \$187,142 \$436,709 1.1 2.6 \$19,185 \$268,751 CZ09 SCE 170,747 970 40.23 \$162,767 \$318,113 \$423,370 2.0 2.6 \$155,346 \$260,604 CZ09-2 LA 170,747 970 40.23 \$162,767 \$197,006 \$423,370 1.2 2.6 \$34,240 \$260,604 CZ10 SDG&E 169,935 1262 41.08 \$167,608 \$503,504 \$411,284 3:0 2.5 \$335,896 \$243,675 CZ10-2 SCE 169,935 1262 41.08 \$167,608 \$317,927 \$411,284 1.9 2.5 \$150,319 \$243,675 CZ11 PG&E 152,559 2415 42.99 \$162,678 \$491,775 \$420,667 3.0 2.6 \$329,096 \$257,989 CZ12-2 SMUD 151,956 2309 42.21 \$162,376 \$288,950 \$417,063 1.8	CZ07	SDG&E	176,705	522	39.47	\$171,118	\$479,038	\$428,490	2.8	2.5	\$307,920	\$257,372
CZ09 SCE 170,747 970 40.23 \$162,767 \$318,113 \$423,370 2.0 2.6 \$155,346 \$260,604 CZ09-2 LA 170,747 970 40.23 \$162,767 \$197,006 \$423,370 1.2 2.6 \$34,240 \$260,604 CZ10 SDG&E 169,935 1262 41.08 \$167,608 \$503,504 \$411,284 3.0 2.5 \$335,896 \$243,675 CZ10-2 SCE 169,935 1262 41.08 \$167,608 \$317,927 \$411,284 1.9 2.5 \$355,896 \$243,675 CZ11 PG&E 152,559 2415 42.99 \$162,678 \$491,775 \$420,667 3.0 2.6 \$329,096 \$257,989 CZ12 PG&E 151,956 2309 42.21 \$162,376 \$494,703 \$417,063 3.0 2.6 \$332,327 \$254,687 CZ12-2 SMUD 151,956 2309 42.21 \$162,376 \$288,950 \$417,063 1	CZ08	SCE	169,825	793.	39.14	\$167,958	\$312,602	\$436,709	1.9	2.6	\$144,645	\$268,751
CZ09-2 LA 170,747 970 40.23 \$162,767 \$197,006 \$423,370 1.2 2.6 \$34,240 \$260,604 CZ10 SDG&E 169,935 1262 41.08 \$167,608 \$503,504 \$411,284 3.0 2.5 \$335,896 \$243,675 CZ10-2 SCE 169,935 1262 41.08 \$167,608 \$317,927 \$411,284 1.9 2.5 \$150,319 \$243,675 CZ11 PG&E 152,559 2415 42.99 \$162,678 \$491,775 \$420,667 3.0 2.6 \$329,096 \$257,989 CZ12 PG&E 151,956 2309 42.21 \$162,376 \$494,703 \$417,063 3.0 2.6 \$332,327 \$254,687 CZ12-2 SMUD 151,956 2309 42.21 \$162,376 \$288,950 \$417,063 1.8 2.6 \$126,573 \$254,687 CZ13 PG&E 156,271 1983 41.25 \$166,722 \$485,422 \$395,770 <td< td=""><td>CZ08-2</td><td>:LA:</td><td>169,825</td><td>793</td><td>39.14</td><td>\$167,958</td><td>\$187,142</td><td>\$436,709</td><td>1.1</td><td>2.6</td><td>\$19,185</td><td>\$268,751</td></td<>	CZ08-2	:LA:	169,825	793	39.14	\$167,958	\$187,142	\$436,709	1.1	2.6	\$19,185	\$268,751
CZ10 SDG&E 169,935 1262 41.08 \$167,608 \$503,504 \$411,284 3.0 2.5 \$335,896 \$243,675 CZ10-2 SCE 169,935 1262 41.08 \$167,608 \$317,927 \$411,284 1.9 2.5 \$150,319 \$243,675 CZ11 PG&E 152,559 2415 42.99 \$162,678 \$491,775 \$420,667 3.0 2.6 \$329,096 \$257,989 CZ12 PG&E 151,956 2309 42.21 \$162,376 \$494,703 \$417,063 3.0 2.6 \$332,327 \$254,687 CZ12-2 SMUD 151,956 2309 42.21 \$162,376 \$288,950 \$417,063 1.8 2.6 \$126,573 \$254,687 CZ13 PG&E 156,271 1983 41.25 \$166,722 \$485,422 \$395,770 2.9 2.4 \$318,699 \$229,047 CZ14 SDG&E 178,505 1672 43.94 \$168,224 \$452,456 \$457,387	CZ09	SCE:	170,747	970	40.23	\$162,767	\$318,113	\$423,370	2.0	2.6	\$155,346	\$260,604
CZ10-2 SCE 169,935 1262 41.08 \$167,608 \$317,927 \$411,284 1.9 2.5 \$150,319 \$243,675 CZ11 PG&E 152,559 2415 42.99 \$162,678 \$491,775 \$420,667 3.0 2.6 \$329,096 \$257,989 CZ12 PG&E 151,956 2309 42.21 \$162,376 \$494,703 \$417,063 3.0 2.6 \$332,327 \$254,687 CZ12-2 SMUD 151,956 2309 42.21 \$162,376 \$288,950 \$417,063 1.8 2.6 \$126,573 \$254,687 CZ13 PG&E 156,271 1983 41.25 \$166,722 \$485,422 \$395,770 2.9 2.4 \$318,699 \$229,047 CZ14 SDG&E 178,505 1672 43.94 \$168,224 \$452,456 \$457,387 2.7 2.7 \$284,232 \$289,163 CZ14-2 SCE 178,505 1672 43.94 \$168,224 \$311,520 \$457,387	CZ09-2	LA	170,747	970.	40.23	\$162,767	\$197,006	\$423,370	1.2	2.6	\$34,240	\$260,604
CZ11 PG&E 152,559 2415 42.99 \$162,678 \$491,775 \$420,667 3.0 2.6 \$329,096 \$257,989 CZ12 PG&E 151,956 2309 42.21 \$162,376 \$494,703 \$417,063 3.0 2.6 \$332,327 \$254,687 CZ12-2 SMUD 151,956 2309 42.21 \$162,376 \$288,950 \$417,063 1.8 2.6 \$126,573 \$254,687 CZ13 PG&E 156,271 1983 41.25 \$166,722 \$485,422 \$395,770 2.9 2.4 \$318,699 \$229,047 CZ14 SDG&E 178,505 1672 43.94 \$168,224 \$452,456 \$457,387 2.7 \$284,232 \$289,163 CZ14-2 SCE 178,505 1672 43.94 \$168,224 \$311,520 \$457,387 1.9 2.7 \$143,296 \$289,163 CZ15 SCE 179,840 518 38.23 \$165,336 \$296,004 \$422,293 1.8 <td< td=""><td>CZ10</td><td>SDG&E</td><td>169,935</td><td>1262</td><td>41.08</td><td>\$167,608</td><td>\$503,504</td><td>\$411,284</td><td>3.0</td><td>2.5</td><td>\$335,896</td><td>\$243,675</td></td<>	CZ10	SDG&E	169,935	1262	41.08	\$167,608	\$503,504	\$411,284	3.0	2.5	\$335,896	\$243,675
CZ12 PG&E 151,956 2309 42.21 \$162,376 \$494,703 \$417,063 3.0 2.6 \$332,327 \$254,687 CZ12-2 SMUD 151,956 2309 42.21 \$162,376 \$288,950 \$417,063 1.8 2.6 \$126,573 \$254,687 CZ13 PG&E 156,271 1983 41.25 \$166,722 \$485,422 \$395,770 2.9 2.4 \$318,699 \$229,047 CZ14 SDG&E 178,505 1672 43.94 \$168,224 \$452,456 \$457,387 2.7 \$284,232 \$289,163 CZ14-2 SCE 178,505 1672 43.94 \$168,224 \$311,520 \$457,387 1.9 2.7 \$143,296 \$289,163 CZ15 SCE 179,840 518 38.23 \$165,336 \$296,004 \$422,293 1.8 2.6 \$130,668 \$256,957 CZ16 PG&E 152,965 4304 53.53 \$169,109 \$483,205 \$378,299 2.9 <td< td=""><td>CZ10-2</td><td>SCE</td><td>169,935</td><td>1262</td><td>41.08</td><td>\$167,608</td><td>\$317,927</td><td>\$411,284</td><td>1.9</td><td>2.5</td><td>\$150,319</td><td>\$243,675</td></td<>	CZ10-2	SCE	169,935	1262	41.08	\$167,608	\$317,927	\$411,284	1.9	2.5	\$150,319	\$243,675
CZ12-2 SMUD 151,956 2309 42.21 \$162,376 \$288,950 \$417,063 1.8 2.6 \$126,573 \$254,687 CZ13 PG&E 156,271 1983 41.25 \$166,722 \$485,422 \$395,770 2.9 2.4 \$318,699 \$229,047 CZ14 SDG&E 178,505 1672 43.94 \$168,224 \$452,456 \$457,387 2.7 \$284,232 \$289,163 CZ14-2 SCE 178,505 1672 43.94 \$168,224 \$311,520 \$457,387 1.9 2.7 \$143,296 \$289,163 CZ15 SCE 179,840 518 38.23 \$165,336 \$296,004 \$422,293 1.8 2.6 \$130,668 \$256,957 CZ16 PG&E 152,965 4304 53.53 \$169,109 \$483,205 \$378,299 2.9 2.2 \$314,096 \$209,190	CZ11	PG&E	152,559	2415	42.99	\$162,678	\$491,775	\$420,667	3.0	2.6	\$329,096	\$257,989
CZ13 PG&E 156,271 1983 41.25 \$166,722 \$485,422 \$395,770 2.9 2.4 \$318,699 \$229,047 CZ14 SDG&E 178,505 1672 43.94 \$168,224 \$452,456 \$457,387 2.7 \$284,232 \$289,163 CZ14-2 SCE 178,505 1672 43.94 \$168,224 \$311,520 \$457,387 1.9 2.7 \$143,296 \$289,163 CZ15 SCE 179,840 518 38.23 \$165,336 \$296,004 \$422,293 1.8 2.6 \$130,668 \$256,957 CZ16 PG&E 152,965 4304 53.53 \$169,109 \$483,205 \$378,299 2.9 2.2 \$314,096 \$209,190	CZ12	PG&E	151,956	2309	42.21	\$162,376	\$494,703	\$417,063	3.0	2.6	\$332,327	\$254,687.
CZ14 SDG&E 178,505 1672 43.94 \$168,224 \$452,456 \$457,387 2.7 \$2.84,232 \$289,163 CZ14-2 SCE 178,505 1672 43.94 \$168,224 \$311,520 \$457,387 1.9 2.7 \$143,296 \$289,163 CZ15 SCE 179,840 518 38.23 \$165,336 \$296,004 \$422,293 1.8 2.6 \$130,668 \$256,957 CZ16 PG&E 152,965 4304 53.53 \$169,109 \$483,205 \$378,299 2.9 2.2 \$314,096 \$209,190	CZ12-2	SMUD	151,956	2309	42.21	\$162,376	\$288,950	\$417,063	1.8-	2.6	\$126,573	\$254,687
CZ14-2 SCE 178,505 1672 43.94 \$168,224 \$311,520 \$457,387 1.9 2.7 \$143,296 \$289,163 CZ15 SCE 179,840 518 38.23 \$165,336 \$296,004 \$422,293 1.8 2.6 \$330,668 \$256,957 CZ16 PG&E 152,965 4304 53.53 \$169,109 \$483,205 \$378,299 2.9 2.2 \$314,096 \$209,190	CZ13	PG&E	156,271	1983	41.25	\$166,722	\$485,422	\$395,770	2.9	2.4	\$318,699	\$229,047
CZ15 SCE '179,840 518 38.23 \$165,336 \$296,004 \$422,293 1.8 2.6 \$130,668 \$256,957 CZ16 PG&E 152,965 4304 53.53 \$169,109 \$483,205 \$378,299 2.9 2.2 \$314,096 \$209,190	CZ14	SDG&E	178,505	1672	43.94	\$168,224	\$452,456	\$457,387	2.7	2.7	\$284,232	\$289,163
CZ16 PG&E 152,965 4304 53.53 \$169,109 \$483,205 \$378,299 2.9 \$2.9 \$314,096 \$209,190	CZ14-2	SCE	178,505	1672	43.94	\$168,224	\$311,520	\$457,387	1.9	2.7	\$143,296	\$289,163
	CZ15	SCE	179,840	518	38.23	\$165,336	\$296,004	\$422,293	1.8	2,6	\$130,668	\$256,957
CZ16-2 LA 152,965 4304 53.53 \$169,109 \$215,341 \$378,299 13 2.2 \$46,231 \$209,190	CZ16	PG&E	152,965	4304	53.53	\$169,109	\$483,205	\$378,299	2.9	2.2	\$314,096	\$209,190
	CZ16-2	LA	152,965	4304	53.53	\$169,109	\$215,341	\$378,299	1.3	2,2	\$46,231	\$209,190



6.7.3 Cost Effectiveness Results - Small Hotel

Figure 70 through Figure 77 contain the cost-effectiveness findings for the Small Hotel packages. Notable findings for each package include:

- Mixed-Fuel # 3 kW PV: Packages are cost effective and achieve savings for all climate zones for both the On-Bill and TDV approaches.
- Mixed-Fuel + 3 kW PV + 5 kWh Battery: The packages are less cost effective as compared to the previous minimal PV only package and not cost effective for LADWP and SMUD service area. The addition of battery reduces the cost effectiveness of packages.
- Mixed-Fuel + PV only: Packages are cost effective and achieve savings for the On-Bill approach for all climate zones except for LADWP territory. Packages are cost effective and achieve savings for the TDV approach for all climate zones.
- Mixed-Fuel + PV + 50 kWh Battery: Adding battery slightly reduces On-Bill B/C ratios. Packages are not cost effective for LADWP territory,
 SMUD territory as well as for climate zones 6,8,9 under PG&E service area.
- All-Electric + 3 kW PV: All packages are cost effective using the On-Bill approach. All packages are cost effective using the TDV approach but do not achieve positive energy cost savings.
- All-Electric + 3 kW PV + 5 kWh Battery: Similar to minimal PV only package, all packages are cost effective using the On-Bill approach. All packages are cost effective using the TDV approach but do not achieve positive energy cost savings.
- All-Electric + PV only: All packages are cost effective for both On-Bill and TDV approaches. Packages achieve on-bill savings for all climate zones.
- All-Electric + PV + 50 kWh Battery: Adding battery slightly reduces On-Bill B/C ratios but is still cost effective for all climate zones.



Figure 70. Cost Effectiveness for Small Hotel - Mixed Fuel + 3kW PV

		Elec	Gas	GHG	eness for sina	Lifecycle		B/C	B/C		[·
	, w.	Savings	Savings	savings	Incremental	Energy Cost	Lifecycle \$-	Ratio	Ratio	NPV	NPV
CZ.	IOU territory	(kWh)	(therms)	(tons)	Package Cost	Savings	TDV Savings	(On-bill)	(TDV)	(On-bill)	(TDV)
Mixed F	uel + 3kW PV	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,									
CZ01	PG&E.	3,941	0	0.8	\$5,566	\$12,616	\$8,326	2.3	1.5	\$7,050	\$2,760
CZ02	PG&E	4,785	0	0.9	\$5,566	\$12,639	\$10,332	2.3	1.9	\$7,073	\$4,766
CZ03	PG&E	4,733	0.	0.9	\$5,566	\$15,146	\$9,991	2.7	1.8	\$9,580	\$4,425
CZ04	PG&E	4,834		1.0	\$5,566	\$13,266	\$10,445	2.4	1.9	\$7,700	\$4,879
CZ04-2	CPAU	4,834	0	1.0	\$5,566	\$11,507	\$10,445	2.1	1.9	\$5,941	\$4,879
CZ05	PG&E	5,027	0	1.0	\$5,566	\$16,048	\$10,634	2.9	1.9	\$10,482	\$5,068
CZ06	SCE	4,769	0	0.9	\$5,566	\$10,276	\$10,559	1.8	1.9	\$4,710	\$4,993
CZ06-2	LA	4,769	0	0.9	\$5,566	\$6,307	\$10,559	1.1	1.9	\$741	\$4,993
CZ07	SDG&E	4,960	. 0	1.0	\$5,566	\$14,576	\$10,861	2.6	2.0	\$9,010	\$5,295
CZ08 "	SCE	4,824	. 0	0.9	\$5,566	\$10,837	\$11,202	1.9	2.0	\$5,271	\$5,636
CZ08-2	LA	4,824		0.9	\$5,566	\$6,505	\$11,202	1.2	2.0	\$939	\$5,636
CZ09	SCE	4,779	. 0	0,9	\$5,566	\$10,298	\$10,824	1.9	1.9	\$4,732	\$5,258
CZ09-2	LA	4,779	0.	0.9	\$5,566	\$6,201	\$10,824	1.1	1.9	\$635	\$5,258
CZ10	SDG&E	4,905	0	1.0	\$5,566	\$16,302	\$10,710	2.9	1.9	\$10,736	\$5,144
CZ10-2	SCE	4,905	0	1.0	\$5,566	\$9,468	\$10,710	1.7	1.9	\$3,902	\$5,144
CZ11	PG&E	4,701	. 0:	0.9	\$5,566	\$14,193	\$10,483	2.6	1.9	\$8,627	\$4,917
CZ12	PG&E	4,770	0	0.9	\$5,566	\$15,262	\$10,596	2.7	1.9	\$9,696	\$5,030
CZ12-2	SMUD	4,770	0	0.9	\$5,566	\$7,848	\$10,596	1.4	1.9	\$2,282	\$5,030
CZ13	PG&E	4,633	0	0.9	\$5,566	\$14,674	\$10,105	2.6	1.8	\$9,108	\$4,539
CZ14	SDG&E	5,377	0	1.1	\$5,566	\$16,615	\$12,375	. 3.0	2.2	\$11,049	\$6,809
CZ14-2	SCE	5,377	0	1.1	\$5,566	\$10,021	\$12,375	1.8	2,2	\$4,455	\$6,809
CZ15	SCE	4,997	. 0	1.0	\$5,566	\$9,542	\$11,164	1.7	2.0	\$3,976	\$5,598
CZ16	PG&E	5,240	0	1.0	\$5,566	\$14,961	\$10,975	2.7	2.0	\$9,395	\$5,409
CZ16-2	LA	5,240	0	1.0	\$5,566	\$5,670	\$10,975	1.0	2.0	\$104	\$5,409



Figure 71, Cost Effectiveness for Small Hotel - Mixed Fuel + 3kW PV + 5 kWh Battery

	·. · · · · · · · · · · · · · · · · · ·	igure / Tr	TOSCHIECTI	уепеээ тот	Small Hotel -	Mixen Luci.	T DK.VVE.V	T O KAATI	Dattery		
		Elec		GHG		Lifecycle	it.	B/C	B/C	1.	,
		Savings	Gas Savings	savings	Incremental	Energy Cost	\$-TDV	Ratio	Ratio	NPV (On-	NPV
CZ	IOU territory	(kWh)	(therms)	(tons)	Package Cost	Savings	Savings	(On-bill)	(TDV)	bill)	(TDV)
Mixed F	uel + 3kW PV +	5kWh Battery	10 10 10 10 10 10 10 10 10 10 10 10 10 1								
CZ01	PG&E	3,941	0.	0.8	\$9,520	\$12,616	\$8,326	1.3	0.9	\$3,096	(\$1,194)
CZ02	PG&E	4,785	0	0.9	\$9,520	\$12,639	\$10,332	1:3	1.1	\$3,119	\$811
CZ03	PG&E	4,733	.0	0.9	\$9,520	\$15,146	\$9,991	1.6	1.0	\$5,626	\$471
CZ04	PG&E	4,834	0.	1.0	\$9,520	\$13,266	\$10,445	1.4	93 51:1:	- \$3,746	\$925
CZ04-2	- CPAU	4,834	0:	1.0	\$9,520	\$11,507	\$10,445	1.2	W-25114	\$1,987	\$925
CZ05	PG&E	5,027	0	1.0	\$9,520	\$16,048	\$10,634	1.7	等基础1.16	\$6,528	\$1,114
CZ05-2	SCG	5,027	0,	1.0	\$9,520	\$16,048	\$10,634	1.7	1.1	\$6,528	\$1,114
CZ06	SCE	4,769	0	0.9	\$9,520	\$10,276	\$10,559	1.1	1.17	\$756	\$1,039
CZ06-2	LA	4,769	. 0	0.9	\$9,520	\$6,307	\$10,559	0.7	1,1	(\$3,213)	\$1,039
CZ07	SDG&E	4,960	. 0	1.0	\$9,520	\$14,576	\$10,861	1.5	1.1;	\$5,056	\$1,341
CZ08	SCE	4,824	0	0.9	\$9,520	\$10,837	\$11,202	1,1	1,2/	\$1,317	\$1,682
CZ08-2	LA	4,824	0	0.9	\$9,520	\$6,505	\$11,202	0.7	1.2	(\$3,015)	\$1,682
CZ09	SCE	4,779	.0:	0.9	\$9,520	\$10,298	\$10,824	1.1	1.1	\$778	\$1,303
CZ09-2	LA	4,779	0.	0.9	\$9,520	\$6,201	\$10,824	0.7	1.1	(\$3,319)	\$1,303
CZ10	SDG&E	4,905	:0::	1.0	\$9,520	\$16,302	\$10,710	1.7	1.1	\$6,782	\$1,190
CZ10-2	SCE	4,905	0	1.0	\$9,520	\$9,468	\$10,710	0.99	1.1	(\$52)	\$1,190
CZ11	PG&E	4,701	0;	0.9	\$9,520	\$14,193	\$10,483	1.5	1:1	\$4,673	\$963
CZ12 :	PG&E	4,770	0	0.9	\$9,520	\$15,262	\$10,596	1.6	1.1	\$5,742	\$1,076
CZ12-2	·SMÙD:	4,770	0	0.9	\$9,520	\$7,848	\$10,596	0,8	1.1	(\$1,672)	.\$1,076
CZ13	PG&E	4,633	0.	0.9	\$9,520	\$14,674	\$10,105	1.5	1.1	\$5,154	\$584
CZ14	SDG&E	5,377	0.	1.1	\$9,520	\$16,615	\$12,375	1.7	1.3	\$7,095	\$2,855
CZ14-2	SCE	5;377	0	1.1	\$9,520	\$10,021	\$12,375	1:1	1:3	\$501	\$2,855
CZ15 -	SCE	4,997	. 0	1.0	\$9,520	\$9,542	\$11,164	1.0	1.2	\$22	\$1,644
·CZ16	PG&E	5,240	0.	1.0	\$9,520	\$14,961	\$10,975	1:6	1.2	\$5,441	\$1,455
CZ16-2	LA	5,240	0	1.0	\$9,520	\$5,670	\$10,975	0.6	***** 1.2	(\$3,851)	\$1,455



Figure 72. Cost Effectiveness for Small Hotel - Mixed Fuel +80kW PV

	T	· ·	,ше / д. оо		Chess for bhi		1	B/C			T
		Elec	Gas	GHG	ž.	Lifecycle	Lifecycle	Ratio	B/C		44
		Savings	Savings	savings	Incremental	Energy Cost	TDV	(On-	Ratio	NPV (On-	NPV
cz	IOU territory	(kWh)	(therms)	(tons)	Package Cost	Savings	Savings	bill)	(TDV)	bill)	(TDV)
Mixed F	uel + 80kW PV						de production of the	VAMAZISH.			
CZ01	PG&E	105,090	0:	20.6	\$179,470	\$336,440	\$221,883	1.9	1.2	\$156,970	\$42,413
CZ02	PG&E	127,592	·- 0°	25.0	\$179,470	\$320,009	\$275,130	1.8	1.5	\$140,539	\$95,660
CZ03	PG&E	126,206	.0	24.8	\$179,470	\$403,900	\$266,426	2.3	1.5	\$224,430	\$86,956
CZ04	PG&E	128,894	0	25.4	\$179,470	\$322,782	\$278,536	1.8	1.6	\$143,312	\$99,066
CZ04-2	CPAU	128,894	0	25.4	\$179,470	\$306,862	\$278,536	1.7	1.6	\$127,392	\$99,066
CZ05	PG&E	134,041	0	26.5	\$179,470	\$427,935	\$283,834	2.4	1.6	\$248,465	\$104,364
CZ06	SCE :	127,168	0	25.0	* :\$179,470	\$200,425	\$281,488	1.1	1.6	\$20,955	\$102,018
CZ06-2	LA	127,168	0	25.0	\$179,470	\$119,357	\$281,488	0.7	1.6	(\$60,113)	\$102,018
CZ07	SDG&E	132,258	0	26:1	\$179,470	\$247,646	\$289,700	1.4	1.6	\$68,176	\$110,230
CZ08	SCE	128,641	. 0.	25.3	\$179,470	\$207,993	\$298,594	1.2	1.7	\$28,523	\$119,124
CZ08-2	LA	128,641	0	25.3	\$179,470	\$122,591	\$298,594	0.7	1.7	(\$56,879)	\$119,124
CZ09	SCE	127,447	0	25.3	\$179,470	\$211,567	\$288,830	1.2	1.6	\$32,096	\$109,360
CZ09-2	LA	127,447	.0	25.3	\$179,470	\$123,486	\$288,830	0.7	. 1.6	(\$55,984)	\$109,360
CZ10	SDG&E	130,792	0	25.8	\$179,470	\$274,832	\$285,386	1.5	1.6	\$95,361	\$105,916
CZ10-2	SCE	130,792	0	25.8	\$179,470	\$206,865	\$285,386	1.2	1.6	\$27,395	\$105,916
CZ11	PG&E	125,366	0	24.6	\$179,470	\$316,781	\$279,331	1.8	1.6	\$137,311	\$99,861
CZ12	PG&E	127,203	0	25.0	\$179,470	\$406,977	\$282,358	2.3	1.6	\$227,507	\$102,888
CZ12-2	SMUD	127,203	0	25.0	\$179,470	\$198,254	\$282,358	1.1	1.6	\$18,784	\$102,888
CZ13	PG&E	123,535	0	24.4	\$179,470	\$317,261	\$269,908	1.8	1.5	\$137,791	\$90,437
CZ14	SDG&E	143,387	0	28.1	\$179,470	\$309,521	\$330,345	1.7	1.8	\$130,051	\$150,875
CZ14-2	SCE	143,387	0	28.1	\$179,470	\$225,083	\$330,345	1.3	1.8	\$45,612	\$150,875
CZ15	SCE	133,246	0	25.9	\$179,470	\$207,277	\$297,648	1.2	1.7	\$27,807	\$118,177
CZ16	PG&E	139,738	0	27.3	\$179,470	\$341,724	\$292,728	1.9	1.6	\$162,254	\$113,258
CZ16-2	LA	139,738	Ö	27.3	\$179,470	\$114,215	\$292,728	0.6	1.6	(\$65,255)	\$113,258



Figure 73. Cost Effectiveness for Small Hotel - Mixed Fuel + 80kW PV + 50 kWh Battery

	^^^ ^ <u></u>	July 0 1 Oc	JE LIIICCU'Y	CIICOD IOI	oman noter -	THE UT UCL	OULLY I.	· · · · · · · · · · · · · · · · · · ·	THE LICEUS		
								B/C			
		Elec	Gas	GHG		Lifecycle	Lifecycle	Ratio	B/C	v *	
		Savings	Savings	savings	Incremental	Energy Cost	TDV	(On-	Ratio	NPV (On-	NPV-
CZ	IOU territory	(kWh)	(therms)	(tons)	Package Cost	Savings	Savings	bill)	(TDV)	bill)	(TDV)
Mixed F	uel + 80kW PV -	-50kWh Batt	ery								
CZ01	PG&E	104,026	0	23.2	\$207,370	\$332,596	\$237,740	± 1.6	1.1	\$125,226	\$30,370
CZ02	PG&E	126,332	. 0	28.1	\$207,370	\$336,179	\$296,058	1.6	1.4	\$128,809	\$88,688
CZ03	PG&E	124,934	Ö	28.0	\$207,370	\$399,220	\$289,360	1.9	1.4	\$191,850	\$81,990
CZ04	PG&E	127,602	. 0	28.5	\$207,370	\$332,161	\$308,887	1.6	1.5	\$124,790	\$101,517
CZ04-2	CPAU	127,602		28.5	\$207,370	\$303,828	\$308,887	1.5	1.5	\$96,458	\$101,517
CZ05	PG&E	132,725	0	.29.8	\$207,370	\$423,129	\$303,627	2.0	1.5	\$215,758	\$96,257
CZ06	SCE	125,880	0.	28.4	\$207,370	\$193,814	\$297,950	0.9	1.4	(\$13,556)	\$90,580
CZ06-2	LA	125,880	0	28.4	\$207,370	\$123,083	\$297,950	0.6	1.4	(\$84,287):	\$90,580
CZ07	SDG&E	130,940	0.	29.5	\$207,370	\$274,313	\$309,682	1.3	1,5	\$66,943	\$102,312
CZ08	SCE	127,332	Ö	28.5	\$207,370	\$199,786	\$312,899	1.0	1.5	(\$7,584)	\$105,529
CZ08-2	LA	127,332	· Ō	28.5	\$207,370	\$124,651	\$312,899	0.6	1.5	(\$82,719)	\$105,529
CZ09	SCE	126,232	. 0	28.2	\$207,370	\$206,706	\$292,804	1.0	1.4	(\$664)	\$85,433
CZ09-2	LA	126,232	0	28.2	\$207,370	\$126,710	\$292,804	0.6	1.4	(\$80,660)	\$85,433
CZ10	SDG&E	129,683	.0	28.4	\$207,370	\$292,202	\$287,278	1.4	1.4	\$84,832	\$79,908
CZ10-2	SCE	129,683	0	28.4	\$207,370	\$206,171	\$287,278	1.0	1.45	(\$1)199)	\$79,908
CZ11	PG&E	124,337	. 0	26.9	\$207,370	\$315,330	\$283,683	1.5	1.4	\$107,960	\$76,313
CZ12	PG&E	126,013	0	27.8	\$207,370	\$403,127	\$297,118	1.9	1.4	\$195,757	\$89,748
CZ12-2	SMUD	126,013	O. :	27.8	\$207,370	\$198,007	\$297,118	1.0	1.4	(\$9,363)	\$89,748
CZ1-3	PG&E	122,591	.0	26.5	\$207,370	\$315,541	\$280,996	1.5	1.4	\$108,171	\$73,626
CZ14	SDG&E	142,257	Ö.,	30.7	- \$207,370	\$317,565	\$334,697	1.5	1.6	\$110,195	\$127,327
CZ14-2	SCE	142,257	0	30.7	\$207,370	\$224,195	\$334,697	1:1	1.6	\$16,824	\$127,327
CZ15	SCE	132,418	0	27.8	\$207,370	\$208,044	\$299,199	1.0	1.4	\$674	\$91,829
CZ16	PG&E	138,402	0	30.7	\$207,370	\$358,582	\$315,699	1.7	1.5	\$151,212	\$108,329
CZ16-2	LA;	138,402	Ŋ.,	30.7	\$207,370	\$118,770	\$315,699	0.6	1.5	(\$88,600)	\$108,329

Figure 74, Cost Effectiveness for Small Hotel - All-Electric + 3kW PV

r 	<u> </u>	1 1	74.00	JUL DILLEC	tveriess for si	HELLE PROCES	TAIL AIGCLITE		A F	T	T
		Flor	Con	CUC		136 and 5		B/C	P/C		1
		Elec	Gas	GHG		Lifecycle	life med s	Ratio	B/C	MIDICION	
67	(011)	Savings	Savings	savings	Incremental	Energy Cost	Lifecycle	(On-	Ratio	NPV (On-	AIDY (TD) (
CZ	IOU territory	(kWh)	(therms)	(tons)	Package Cost*	Savings	TDV Savings	bill)	(TDV)	bill)	NPV (TDV)
	ric + 3kW PV							en anderek in der Transporter			
CZ01	PG&E	-155,861	16917	54.7	(\$1,265,139)	(\$568,892)	(\$106,835)	2.2	11.8	\$696,246	
CZ02	PG&E	-113,954	12677	40.9	(\$1,266,111)	(\$229,433)	(\$41,288)	5,5	30.7	\$1,036,679	\$1,224,823
ÇZ03	PG&E	-105,862	12322	41.4	(\$1,268,383)	(\$309,874)	(\$41,175)	4.1	30.8	\$958,510	\$1,227,208
CZ04	PG&E	-108,570	11927	37.5	(\$1,268,218)	(\$208,239)	(\$42,689)	6.1	29.7	\$1,059,980	\$1,225,530
CZ04-2	CPAU	-108,570	11927	37.5	(\$1,268,218)	(\$6,261)	(\$42,689)	202.6	29,7	\$1,261,958	\$1,225,530
CZ05	PG&E	-103,579	11960	39.3	(\$1,268,272)	(\$332,879)	(\$44,051)	3.8	28.8	\$935,393	\$1,224,221
CZ06	SCE	-73,524	8912	30.3	(\$1,268,413)	\$48,898	(\$17,484)	>1	72.5	\$1,317,311	\$1,250,929
CZ06-2	ĹA	-64,859	8188	29.0	(\$1,266,760)	(\$120,842)	(\$12,337)	10.5	102.7	\$1,145,918	\$1,254,423
CZ07	SDG&E	-67,090	8353	29.2	(\$1,264,731)	(\$43,964)	(\$11,618)	28.8	108.9	\$1,220,767	\$1,253,113
CZ08	SCE	-67,090	8353	29.2	(\$1,264,731)	\$48,736	(\$11,618)	>1	108,9	\$1,313,467	\$1,253,113
CZ08-2	LA	-67,483	8402	29.3	(\$1,266,529)	(\$35,547)	(\$11,126)	35.6	113.8	\$1,230,982	\$1,255,403
CZ09	SCE	-67,483	8402	29.3	(\$1,266,529)	\$52,410	(\$11,126)	>1	113.8	\$1,318,939	\$1,255,403
CZ09-2	LA	-75,157	8418	- 27.2	(\$1,263,531)	(\$156,973)	(\$25,469)	8.0	49,6	\$1,106,558	\$1,238,061
CZ10	SDG&É	-75,157	8418	27.2	(\$1,263,531)	(\$54,711)	(\$25,469)	23.1	49.6	\$1,208,820	\$1,238,061
CZ10-2	SCE .	-94,783	10252	31,9	(\$1,264,340)	(\$169,847)	(\$38,904)	7.4	32.5	\$1,094,493	\$1,225,436
CZ11	PG&E	-94,702	. 10403	33.0	(\$1,265,779)	(\$324,908)	(\$34,968)	3.9	36.2	\$940,872	\$1,230,811
CZ12	PG&E	-94,297	10403	33.1	(\$1,265,779)	\$13,603	(\$33,757)	>1	37.5	\$1,279,382	\$1,232,022
CZ12-2	SMUD	-92,196	10029	31.5	(\$1,264,152)	(\$168,358)	(\$40,229)	7.5	31.4	\$1,095,794	\$1,223,923
CZ13	PG&E	-96,021	10056	30.7	(\$1,264,510)	(\$308,542)	(\$44,202)	4.1	28.6	\$955,969	\$1,220,308
CZ14	SDG&E	-96,021	10056	30.7	(\$1,264,510)	(\$110,730)	(\$44,202)	11.4	28.5	\$1,153,780	\$1,220,308
CZ14-2	SCE	-44,856	5579	19.0	(\$1,262,631)	\$8,996	(\$10,256)	>1.	123.1	\$1,271,627	\$1,252,375
CZ15	ŚCĖ	-211,468	17599	42.9	(\$1,268,907)	(\$625,671)	(\$228,203)	2.0	5.6	\$643,236	\$1,040,704
CZ16	PG&E	-211,468	17599	42.9	(\$1,268,907)	\$37,142	(\$228,203)	>1	5.6	\$1,306,049	\$1,040,704
CZ16-2	LA	-155,861	16917	54.7	(\$1,265,139)	(\$568,892)	(\$106,835)	2.2	11.8	\$696,246	\$1,158,304



Figure 75. Cost Effectiveness for Small Hotel - All-Electric + 3kW PV + 5 kWh Battery

		,	,	:	or Small Hote		7	B/C			
		Elec	Gas	GHG		Lifecycle	•	Ratio	В/С		
	· .	Savings	Savings	savings	Incremental	Energy Cost	\$-TDV	(On-	Ratio	NPV (On-	
CZ	IOU territory	(kWh)	(therms)	(tons)	Package Cost	Savings	Savings	bill)	(TDV)	bill)	NPV (TDV)
All-Elect	ric + 3kW PV + !	skWh Battery									
CZ01	PG&E	-155,861	16917	54.7	(\$1,288,428)	(\$568,892)	(\$106,835)	2.3	12.1	\$719,536	\$1,181,593
CZ02	PG&E	-113,954	12677	40.9	(\$1,288,428)	(\$229,433)	(\$41,288)	5.6	31.2	\$1,058,996	\$1,247,140
CZ03	PG&E	-105,862	12322	41.4	(\$1,288,428)	(\$309,874)	(\$41,175)	4.2	31.3	\$978,554	\$1,247,253
CZ04	PG&E	-108,570	11927	37.5	(\$1,288,428)	(\$208,239)	(\$42,689)	6.2	30.2	\$1,080,190	\$1,245,740
CZ04-2	CPAU	-108,570	11927	37.5	(\$1,288,428)	(\$6,261)	(\$42,689)	205.8	30.2	\$1,282,167	\$1,245,740
CZ05	PG&E	-103,579	11960	39,3	(\$1,288,428)	(\$332,879)	(\$44,051)	3.9	. 29.2	\$955,549	\$1,244,377
CZ06	SCE	-73,524	8912	30.3	(\$1,288,428)	(\$52,341)	(\$17,484)	24.6	73.7	\$1,236,087	\$1,270,944
CZ06-2	LA	-73,524	8912	.30.3	(\$1,288,428)	\$48,898	(\$17,484)	>1	73.7	\$1,337,326	\$1,270,944
CZ07	SDG&E	-64,859	8188	29.0	(\$1,288,428)	(\$120,842)	(\$12,337)	10.7	104.4	\$1,167,586	\$1,276,091
CZ08	SCE	-67,090	8353	29.2	(\$1,288,428)	(\$43,964)	(\$11,618)	29.3	110.9	\$1,244,464	\$1,276,810
CZ08-2	LA	-67,090	8353	29.2	(\$1,288,428)	\$48,736	(\$11,618)	: 21	110.9	\$1,337,164	\$1,276,810
CZ09	SCE	-67,483	8402	29.3	(\$1,288,428)	(\$35,547)	(\$11,126)	36.2	115.8	\$1,252,881	\$1,277,302
CZ09-2	LA	-67,483	8402	29.3	(\$1,288,428)	\$52,410	(\$11,126)	>1	115,8	\$1,340,838	\$1,277,302
CZ10	SDG&E	-75,157	8418	27.2	(\$1,288,428)	(\$156,973)	(\$25,469)	8.2	: 50.6	\$1,131,455	\$1,262,959
CZ10-2	SCE	-75,157	8418	27.2	(\$1,288,428)	(\$54,711)	(\$25,469)	23.5	50.6	\$1,233,718	\$1,262,959
CZ11	PG&E	-94,783	10252	31.9	(\$1,288,428)	(\$169,847)	(\$38,904)	7.6	33.1	\$1,118,582	\$1,249,524
CZ1Ž	PG&E	-94,702	10403	33.0	(\$1,288,428)	(\$324,908)	(\$34,968)	4.0°	36.8	\$963,520	\$1,253,460
CZ12-2	SMUD	-94,297	10403	33.1	(\$1,288,428)	\$13,603	(\$33,757)	>1	38.2	\$1,302,031	\$1,254,671
CZ13	PG&E	-92,196	10029	31.5	(\$1,288,428)	(\$168,358)	(\$40,229)	7.7	32.0	\$1,120,071	\$1,248,199
CZ14	SDG&E	-96,021	10056	30.7	(\$1,288,428)	(\$308,542)	(\$44,202)	4:2	29.1	\$979,887	\$1,244,226
CZ14-2	SCE	-96,021	10056	30,7	(\$1,288,428)	(\$110,730)	(\$44,202)	11,6	29.1	\$1,177,698	\$1,244,226
CZ15	SCE	-44,856	5579	19.0	(\$1,288,428)	\$8,996	(\$10,256)	>1	125.6	\$1,297,425	\$1,278,172
CZ16	PG&E	-211,468	17599	42.9	(\$1,288,428)	(\$625,671)	(\$228,203)	2.1	5.6	\$662,757	\$1,060,225
CZ16-2	LA	-211,468	17599	42.9	(\$1,288,428)	\$37,142	(\$228,203)	>1	5.6	\$1,325,570	\$1,060,225



Figure 76. Cost Effectiveness for Small Hotel – All-Electric + 80kW PV

		Elec Savings	Gas Savings	GHG savings	Incremental	Lifecycle Energy Cost	\$-TDV	B/C Ratio (On-	B/C Ratio	NPV (On-	
CZ	IOU territory	(kWh)	(therms)	(tons)	Package Cost	Savings	Savings	bill)	(TDV)	bill)	NPV (TDV)
All-Elect	tric + 80kW PV	Writerije († 15		. Projektins	Destruction of the						
CZ01	PG&E	-54,712	16917	74.6	(\$1,123,442)	(\$240,170)	\$106,722	4.7	>1	\$883,272	\$1,230,164
CZ02	PG&E	8,853	12677	65.0	(\$1,124,415)	\$128,649	\$223,510	>1	>1	\$1,253,063	\$1,347,925
CZ03	PG&E:	15,612	12322	65.3	(\$1,126,687)	\$44,532	\$215,260	>1	>1	\$1,171,219	\$1,341,947
CZ04	PG&E	15,490	11927	62.0	(\$1,126,522)	\$145,778	\$225,402	>1	>1	\$1,272,300	\$1,351,924
CZ04-2	CPAU	15,490	11927	62.0	(\$1,126,522)	\$289,094	\$225,402	>1	>1	\$1,415,616	\$1,351,924
CZ05	PG&E	25,436	11960	64.8	(\$1,126,575)	\$56,019	\$229,149	>1	>1	\$1,182,594	\$1,355,724
CZ:06	SCE	48,875	8912	54.4	(\$1,126,716)	\$163,343	\$253,445	>1	>1	\$1,290,060	\$1,380,161
CZ06-2	LA	62,439	8188	54.1	(\$1,125,064)	\$115,822	\$266,502	>1	//////////////////////////////////////	\$1,240,886	\$1,391,565
CZ07	SDG&E	56,727	8353	53.5	(\$1,123,034)	\$147,987	\$275,773	>1	: i>1:	\$1,271,022	\$1,398,808
CZ08	SCE	56,727	8353	53.5	(\$1,123,034)	\$163,971	\$275,773	>1	>1	\$1,287,005	\$1,398,808
CZ08-2	LA	55,185	8402	53.7	(\$1,124,832)	\$155,101	\$266,880	>1	/////>1	\$1,279,933	\$1,391,712
CZ09	SCE	55,185	8402	53.7	(\$1,124,832)	\$169,010	\$266,880	>1	>1	\$1,293,843	\$1,391,712
CZ09-2	LA	50,731	8418	52.0	(\$1,121,834)	\$113,936	\$249,207	>1	>1	\$1,235,770	\$1,371,041
CZ10	SDG&E	50,731	8418	52:0	(\$1,121,834)	\$138,265	\$249,207	>1	>1	\$1,260,099	\$1,371,041
CZ10-2	SCE	25,882	10252	55.6	(\$1,122,643)	\$162,626	\$229,944	>1	>1	\$1,285,269	\$1,352,587
CZ11	PG&E	27,731	10403	57.1	(\$1,124,083)	\$12,954	\$236,794	>1	~:. >1 :	\$1,137,037	\$1,360,876
CZ12.	PG&E	28,136	10403	57.2	(\$1,124,083)	\$206,756	\$238,005	>1	>1	\$1,330,839	\$1,362,087
CZ12-2	SMUD	26,706	10029	55.0	(\$1,122,455)	\$165,991	\$219,574	-/:->/:>1	>1"	\$1,288,446	\$1,342,030
CZ13	PG&E	41,989	10056	57.8	(\$1,122,814)	\$22,333	\$273,768	>1	>1	\$1,145,147	\$1,396,582
CZ14	SDG&E	41,989	10056	57.8	(\$1,122,814)	\$120,943	\$273,768	>1	>1	\$1,243,757	\$1,396,582
CZ14-2	SCE	83,393	5579	44.0	(\$1,120,934)	\$210,511	\$276,228	>1	>1	\$1,331,445	\$1,397,162
CZ15	SCE	-76,971	17599	69.2	(\$1,127,210)	(\$199,308)	\$53,550	5.7	>1	\$927,902	\$1,180,760
CZ16	PG&E	-76,971	17599	69.2	(\$1,127,210)	\$172,787	\$53,550	>1	>1	\$1,299,997	\$1,180,760
CZ16-2	ĽA	-54,712	16917	74.6	(\$1,123,442)	(\$240,170)	\$106,722	4.7	>1	\$883,272	\$1,230,164



Figure 77. Cost Effectiveness for Small Hotel - All-Electric + 80kW PV + 50 kWh Battery

					L DINAM HOLEI			,	1		
		Elec	Gas	GHG		Lifecycle		B/C Ratio	B/C		
	1	Savings	Savings	savings	Incremental	Energy Cost	\$-TDV	(On-	Ratio	NPV (On-	
cz	IOU territory	(kWh)	(therms)	(tons)	Package Cost	Savings	Savings	bill)	(TDV)	bill)	NPV (TDV)
All-Elect	ric + 80kW PV +		<u></u>								
CZ01	PG&E	-55,323	16917	75.7	(\$1,095,542)	(\$238,351)	\$118,605	4.6	>1	\$857,191	\$1,214,147
CZ02	PG&E	7,849	12677	67.4	(\$1,096,515).	\$129,794	\$239,632	>1	>1	\$1,226,309	\$1,336,146
CZ03	PG&E	14,594	12322	67.7	(\$1,098,787)	\$43,166	\$235,280			\$1,141,953	\$1,334,067
CZ04	PG&E	14,459	11927	64.4	(\$1,098,622)	\$148,698	\$249,244	::::::::::::::::::::::::::::::::::::::	>1	\$1,247,320	\$1,347,866
CZ04-2:	CPAU	14,459	11927	64.4	(\$1,098,622)	\$286,573	\$249,244	÷1	>1	\$1,385,195	\$1,347,866
CZ05·	PG&E	24,292	11960	67.6	(\$1,098,675)	\$53,719	\$244,514	الإين ج	****** 1 *** 1 ***** 1 ******* 1 ********	\$1,152,394	\$1,343,189
CZ06	SCE :	47,762	8912	57.2	(\$1,098,816)	\$165,763	\$267,221	(3% S1)	:://://///////////////////////////////	\$1,264,579	\$1,366,037
CZ06-2	LA .	61,252	8188	57.1	(\$1,097,164)	\$138,060	\$283,797	/////////>1	>1	\$1,235,223	\$1,380,960
CZ07	SDG&E	55,588	8353	56.2.	(\$1,095,134)	\$138,718	\$286,483	>1	>1	\$1,233,852	\$1,381,618
CZ08	SCE	55,588	8353	56.2	(\$1,095,134)	\$165,932	\$286,483	#### \$1	>1	\$1,261,066	\$1,381,618
CZ08-2	LA	54,162	8402	56.1	(\$1,096,932)	\$149,615	\$269,453	>1	 } } }	+\$1,246,548	\$1,366,386
CZ09	SCE	54,162	8402	56.1	(\$1,096,932)	\$171,168	\$269,453	∌1 ≥1	>1	\$1,268,101	\$1,366,386
CZ09-2.	LA	49,832	8418	54.1	(\$1,093,934)	\$120,627	\$250,720	1	>1	\$1,214,561	\$1,344,654
CZ10	SDG&E	49,832	8418	54.1	(\$1,093,934)	\$136,144	\$250,720	>1	>1	\$1,230,078	\$1,344,654
CZ10-2	SCE	25,148	10252	57.3	(\$1,094,743)	\$160,744	\$233,842	>1	>1	\$1,255,487	\$1,328,585
CZ11	PG&E	26,813	10403	59.2	(\$1,096,183)	\$10,314	\$247,504	进; 1.	>1-	\$1,106,497	\$1,343,686
CZ12	PG&E	27,217	10403	59.3	(\$1,096,183)	\$206,749	\$248,790	>1	>1	\$1,302,931	\$1,344,973
CZ12-2	SMUD	26,027	10029	56.5	(\$1,094,555)	\$164,506	\$229,300	>1		\$1,259,061	\$1,323,856
CZ13	PG&E	41,123	10056	59.7	(\$1,094,914)	\$25,707	\$276,947	25.00 />1 5	>1.	\$1,120,621	\$1,371,860
CZ14	SDG&E	41,123	10056	59.7	(\$1,094,914)	\$119,382	\$276,947	>1.	>1	\$1,214,296	\$1,371,860
CZ14-2	SCE	82,697	5579	45.5	(\$1,093,034)	\$209,837	\$277,287		>1	\$1,302,871	\$1,370,321
CZ15	SCE	-77,815	17599	71.1	(\$1,099,310)	(\$193,758)	\$65,850	5,7	>1	\$905,552	\$1,165,160
CZ16	PG&E	-77,815	17599	71.1	(\$1,099,310)	\$175,872	\$65,850	>1	>1	\$1,275,182	\$1,165,160
CZ16-2	LA	-55,323	16917	75.7	(\$1,095,542)	(\$238,351)	\$118,605	4.6	>1	\$857,191	\$1,214,147

6.8 List of Relevant Efficiency Measures Explored

The Reach Code Team started with a potential list of energy efficiency measures proposed for 2022 Title 24 codes and standards enhancement measures, as well as measures from the 2018 International Green Construction Code, which is based on ASHRAE Standard 189.1-2017. The team also developed new measures based on their experience. This original list was over 100 measures long. The measures were filtered based on applicability to the prototypes in this study, ability to model in simulation software, previously demonstrated energy savings potential, and market readiness. The list of 28 measures below represent the list of efficiency measures that meet these criteria and were investigated to some degree. The column to the far right indicates whether the measure was ultimately included in analysis or not.

Figure 78. List of Relevant Efficiency Measures Explored

Building Component	Measure Name	Measure Description	Notes	Include?
Water Heating	Drain water Heat Recovery	Add drain water heat recovery in hotel prototype	Requires calculations outside of modeling software.	Y
Envelope.	High performance fenestration	Improved fenestration SHGC (reduce to 0.22).		Y
Envelope	High SHGC for cold climates	Raise prescriptive fenestration SHGC (to 0.45) in cold climates where additional heat is beneficial.	4	Y
Envelope	Allowable fenestration by orientation	Limit amount of fenestration as a function of orientation		·Y
Envelope.	High Thermal Mass Buildings	Increase building thermal mass. Thermal mass slows the change in internal temperature of buildings with respect to the outdoor temperature, allowing the peak cooling load during summer to be pushed to the evening, resulting in lower overall cooling loads.	Initial energy modeling results showed marginal cooling savings, negative heating savings.	N.
Envelope	Opaque Insulation	Increases the insulation requirement for opaque envelopes (i.e., roof and above-grade wall).	Initial energy modeling results showed marginal energy savings at significant costs which would not meet c/e criteria.	N:
Envelope	Triple pane windows	U-factor of 0.20 for all windows	Initial energy modeling results showed only marginal energy sayings and, in some cases, increased energy use.	N



Building Component	Measure Name	Measure Description	Notes	Include?
Envelope:	Duct Leakage Testing	Expand duct leakage testing requirements based on ASHRAE Standard 215-2018. Method of Test to Determine Leakage of Operating HVAC Air Distribution Systems (ANSI Approved).	More research needs to be done on current ductile leakage and how it can be addressed.	N.
Envelope:	Fenestration area	Reduce maximum allowable fenestration area to 30%.	Instead of this measure, analyzed measure which looked at limiting fenestration based on Wall orientation.	N
Envélopé .	Skinny triple pane windows	U-factor of 0:20 for all windows, with no changes to existing framing or building structure.	Market not ready. No commercially-available products for commercial buildings.	Ń
Envelope	Permanent projections	Detailed prescriptive requirements for shading based on ASHRAE 189, PF >0.50 for first story and >0.25 for other floors. Many exceptions. Corresponding SHGC multipliers to be used.	Title 24 already allows owner to trade off SHGC with permanent projections. Also, adding requirements for permanent projections would raise concerns.	N
Envelope	Reduced infiltration	Reduce infiltration rates by improving building sealing.	Infiltration rates are a fixed ACM input and cannot be changed. A workaround attempt would not be precise, and the practicality of implementation by developers is low given the modeling capabilities and the fact that in-field verification is challenging. Benefits would predominantly be for air quality rather than energy.	:[N]:

Building Component A	Measure Name	Measure Description	Notes	Include?
			For small hotels, the ventilation requirement could be met by various approaches, and the most common ones are:	
			a. Exhaust only system, and ventilation is met by infiltration or window operation.	
			b. Through a Z-duct that connects the zone AC unit's intake to an outside air intake louver.	
			c., Centralized ventilation system (DOAS)	1
00	Heat recovery ventilation	Lower the capacity trigger for air economizers. Previous	The prototype developed for the small hotel is using. Type 2 above. The major consideration is that currently, HRV + PTACs cannot be modeled at each guest room, only at the rooftop system. Option 1 would require the same type of HRV implementation as Option 2. Option 3 may be pursuable, but would require a significant redesign of the system, with questionable impacts. Previous studies have found heat recovery as cost effective in California only in buildings with high loads or high air exchange rates, given the relatively mild climate.	.N
	anacity Syctome	studies have shown cost effectiveness for systems as low as 3 tons.	·	Y,
HVAC Re	leduce VAV minimum flow limit	Current T24 and 90.1 requirements limit VAV minimum flow rates to no more than 20% of maximum flow. Proposal based on ASHRAE Guideline 36 which includes sequences that remove technical barriers that previously existed. Also, most new DDC controllers are now capable of lower limits. The new limit may be as low as the required ventilation rate. A non-energy benefit of this measure is a reduction in over-cooling, thus improving comfort.		¥



Building	Component	Measure Name	Measure Description	Notes	Include?
HVAC	, ,	Building Automation System (BAS) improvements	With adoption of ASHRAE: Guideline 36 (GDL-36), there is now a national consensus standard for the description of high-performance sequences of operation. This measure will update BAS control requirements to improve usability and enforcement and to increase energy, efficiency. BAS control requirement language will be improved either by adoption of similar language to GDL-36, or reference to GDL-36. Specific T24 BAS control topics that will be addressed include at a minimum: DCV, demand-based reset of SAT, demand-based reset of SP, dual-maximum zone sequences, and zone groups for scheduling.	In order to realize any savings in the difference, we would need a very detailed energy model with space-by-space load/occupant diversity, etc. We would also need more modeling capability than is currently available in CBECC-Com.	Ņ
HVAC		Fault Detection Devices (FDD)	Expand FDD requirements to a wider range of AHU faults beyond the economizer. Fault requirements will be based on NIST field research, which has consequently been integrated into ASHRAE Guideline 36 Best in Class Sequences of Operations. Costs are solely to develop the sequences, which is likely minimal, and much of the hardware required for economizer FDD is also used to detect other faults.	Market not ready.	N
HVAC		Small circulator pumps ECM, trim to flow rate	Circulator pumps for industry and commercial.	Hot water pump energy use is small already (<1% building electricity usage) so not much savings potential. More savings for CHW pumps. Modeling limitations as well.	N _*
HVAC		High Performance Ducts to Reduce Static Pressure	Revise requirements for duct sizing to reduce static pressure.	Preliminary energy modeling results showed only marginal energy savings compared to measure cost.	N.
HVAC		Parallel fan-powered boxes	Use of parallel fan-powered boxes	Unable to model PFPB with variable speed fans in modeling software.	N
Lighting	L	Daylight Dimming Plus OFF	Automatic daylight dimming controls requirements include the OFF step.		¥:
Lighting		Occupant Sensing in Open Plan. Offices	Take the PAF without allowing for increased design wattage		Y.
Lighting		Institutional tuning	Take the PAE without allowing for increased design wattage		Y



Building Component	Measure Name	Measure Description	Notes	Include?
Lighting	Reduced interior Lighting Power Density	Reduced interior LPD values.		Y
Lighting	Shift from general to task illumination	Low levels of general illumination with task and accent lighting added to locations where higher light levels are required. The shift from general to task illumination measure is based on the assumption that proper lighting of a desk surface with high efficacy lighting can allow for the significant reduction of ambient general lighting.	This is a tough measure to require as the LPDs decrease.	Ņ
Lighting	Future-proof lighting controls	Fill any holes in the current code that could lead to the situations where TLEDS or LED fixtures that are not dimmable or upgradable in the future, or any other issues with code that make it hard to transition to ALCS/IoT lighting in the future.	Major lighting controls already covered in other measures being considered	Ņ
Lighting	Integrated control of lighting and HVAC systems	Formalize the definition of "lighting and HVAC control integration" by defining the level of data sharing required between systems and the mechanism needed to share such data. The highest savings potential would likely be generated from VAV HVAC systems by closing the damper in unoccupied zones based on the occupancy sensor information from the lighting systems.	Not market ready enough.	N
Other	NR Plug Load Controls	Energy savings opportunities for plug loads, which may include: energy efficient equipment, equipment power management, occupancy sensor control, and occupant awareness programs. The proposal could be extending controlled receptacles requirements in Section 130.5(d) to more occupancy types. It would also consider circuit-level controls.	Office equipment now all have their own standby power modes that use very little power, making plug load controls very difficult to be cost-effective.	N



6.9 Additional Rates Analysis - Healdsburg

After the final version of the report was released, the Reach Code Team provided additional cost effectiveness analysis in Climate Zone 2 using City of Healdsburg electric utility rates and PG&E gas rates. All aspects of the methodology remain the same, and the results for each package and prototype are aggregated below in Figure 79 through Figure 81. Results generally indicate:

- Mixed fuel prototypes achieve positive compliance margins for EE packages and are cost effective.
- All-electric prototypes achieve slightly lower compliance margins than mixed fuel for EE packages and are cost effective.
- All PV and PV+Battery packages are cost effective both using an on-bill and TDV approach.



Figure 79. Healdsburg Utility Rates Analysis - Medium Office, All Packages Cost Effectiveness Summary

,	rigure 79. Healusbu	ing ouni	y mates.	marysi	3 micu	ium Omice,	AII L acin	ages cos	LILLOUI	IVCIICS	3 Junimar	у
					Comp-		Lifecycle		B/C			
		Elec Savings	Gas Savings	GHG savings	liance Margin	Incremental Package	Energy Cost	\$-TDV	Ratio (On-	B/C Ratio	NPV (On-	
Prototype	Package	(kWh)	(therms)	(tons)	(%)	Cost	Savings	Savings	bill)	(TDV)	bill)	NPV (TDV)
	Mixed Fuel + EE	40,985	÷505	8.1	17%	\$66,649	\$89,645	\$99,181	1.3	1.5	\$22,996	\$32,532
	Mixed Fuel + EE + PVB	255,787	-505	50.6	17%	\$359,648	\$510,922	\$573,033	1,4	1.6	\$151,274	\$213,385
	Mixed Fuel + HE	3,795	550	4.3	4%	\$68,937	\$24,204	\$24,676	0.4	0.4	-\$44,733	-\$44,261
	All-Electric	-49,684	3,868	5.0	-7%	-\$73,695	-\$7,042	-\$41,429	10.5	1.8	\$66,653	\$32,266
	All-Electric + EE	-11,811	3,868	15.2	10%	-\$7,046	\$83,285	\$58,563	· /: >1	>1	\$90,331	\$65,609
	All-Electric + EE + PVB	203,026	3,868	57.8	10%	\$285,953	\$511,954	\$532,273	1.8	1.9	\$226,001	\$246,320
	All-Electric + HE	-45,916	3,868	6.1	-5%	-\$22,722	\$6,983	-\$26,394	>1	0.9	\$29,705	-\$3,672
	Mixed Fuel + 3kW	4,785	0	0.9	n/a	\$5,566	\$10,430	\$10,500	1.9	1.9	\$4,864	\$4,934
Medium Office	Mixed Fuel + 3kW + 5kWh	4,785	0	0.9	n/a	\$8,356	\$10,430	\$10,500	1.2	1.3	\$2,074	\$2,144
0,,,,,,	Mixed Fuel + 135kW	215,311	0	41.5	n/a	\$250,470	\$424,452	\$471,705	1,7	1.9	\$173,982	\$221,235
	Mixed Fuel + 135kW + 50kWh	214,861	D	42.6	n/a	\$278,370	\$423,721	\$472,898	1.5	1.7	\$145,351	\$194,528
	All-Electric + 3kW	-44,899	3,868	6.0	n/a	-\$68,129	\$3,299	-\$30,928	>1	2.2	\$71,429	\$37,201
	All-Electric + 3kW + 5kWh	-44,899	3,868	6.0	n/a	-\$65,339	\$3,299	-\$30,928	>1	2.1	\$68,639	\$34,411
	All-Electric + 135kW	165,627	3,868	46.6	n/a	\$176,775	\$424,146	\$430,276	2.4	2.4	\$247,371	\$253,501
	All-Electric + 135kW + 50kWh	165,200	3,868	47.7	n/a	\$204,675	\$423,466	\$431,469	2.1	2.1	\$218,792	\$226,795
	All-Electric + 80kW + 50kWh	40,985	-505	8.1	17%	\$66,649	\$89,645	\$99,181	1,3	1.5	\$22,996	\$32,532

Figure 80. Healdsburg Utility Rates Analysis - Medium Retail, All Packages Cost Effectiveness Summary

	ABULL OUR ANDURENCE IN	, 	×				,				, ', 	× · · · · · · · · · · · · · · · · · · ·
								•				
				-	Comp-		Lifecycle		B/C			
		Elec	Gas	GHG	liance	Incremental	Energy.		Ratio	B/C		. ×
		Savings	Savings	savings	Margin	Package	Cost	\$-TDV	(On-	Ratio	NPV (On-	
Prototype	Package	(kWh)	(therms)	(tons)	(%)	Cost	Savings	Savings	bill)	(TDV)	bill)	NPV (TDV)
	Mixed Fuel + EE	18,885	613	8.7	13%	\$5,569	\$49,546	\$59,135	8.9	10.6	\$43,977	\$53,566
	Mixed Fuel + EE + PVB	189,400	613	43.8	13%	\$249,475	\$376,219	\$465,474	1.5	1.9	\$126,744	\$215,999
	Mixed Fuel + HE	2,288	229	2.0	3%	\$9,726	\$13,143	\$13,998	1.4	1.4	\$3,417	\$4,273
	All-Electric	-21,786	2,448	7.5 .	-1%	-\$27,464	\$9,228	-\$4,483	>1	6.1	\$36,692	\$22,981
	All-Electric + EE	2,843	2,448	14.6	13%	-\$21,895	\$61,918	\$56,893	>1	>1	\$83,813	\$78,788
	All-Electric + EE + PVB	173,387	2,448	49.9	13%	\$222,012	\$391,257	\$463,431	1.8	2.1	\$169,245	\$241,419
	All-Electric + HE	-16,989	2,448	8.9	3%	-\$4,211	\$23,567	\$11,251	>1	>1	\$27,779	\$15,463
Medium	Mixed Fuel + 3kW	4,685	0	0.9	'n/a	.\$5,566	\$10,256	\$10,262	1.8	1.8	\$4,690	\$4,696
Retail	Mixed Fuel + 3kW + 5kWh	4,685	Ö	0,9	n/a	\$8,356	\$10,256	\$10,262	1.2	1.2	\$1,900	\$1,906
. v.	Mixed Fuel + 110kW	171,790	0	. 33.3	n/a.	\$204,087	\$316,293	\$376,300	1.5	1.8	\$112,206	\$172,213
	Mixed Fuel + 110kW + 50kWh	170,542	0	35.1	n/a	\$231,987	\$320,349	\$398,363	1,4	1.7	\$88,363	\$166,376
	All-Electric + 3kW	-17,101	2,448	8.4	n/a	-\$21,898	\$19,523	\$5,779	>1	>1	\$41,421	\$27,677
	All-Electric + 3kW + 5kWh	-17,101	2,448	8.4	n/a	-\$19,108	\$19,523	\$5,779	£ / >1 ₹.	>1	\$38,631	\$24,887
	All-Electric + 110kW	150,004	2,448	40.8	n/a	\$176,623	\$332,213	\$371,817	1.9	2.1	\$155,591	\$195,194
	All-Electric + 110kW + 50kWh	148,793	2,448	42.9	n/a	\$204,523	\$335,043	\$394,099	1.6	1.9	\$130,520	\$189,577

104 - 2019-07-25

Figure 81. Healdsburg Utility Rates Analysis - Small Hotel, All Packages Cost Effectiveness Summary

	Tigare of Titearusb					T		<u> </u>			Summing	
		"			Comp-	* * * * * * * * * * * * * * * * * * *	Lifecycle		B/C			
		Elec Savings	Gas Savings	GHG savings	liance Margin	Incremental Package	Energy Cost	\$-TDV	Ratio (On-	B/C Ratio	NPV (On-	
Prototype	Package	(kWh)	(therms)	(tons)	(%)	Cost	Savings	Savings	bill)	(TDV)	bill)	NPV (TDV)
	Mixed Fuel + EE	3,802	976	3.9	7%	\$20,971	\$22,829	\$29,353	1.1	1.4	\$1,857	\$8,381
	Mixed Fuel + EE + PVB	130,144	976	31.1	7%	\$205,967	\$254,577	\$336,575	1.2	1.6	\$48,610	\$130,608
	Mixed Fuel + HE	981	402	2.7	3%	\$23,092	\$12,291	\$11,808	0,5	0.5	-\$10,801	-\$11,284
	All-Electric	118,739	12,677	40.0	-12%	-\$1,297,757	-\$24,318	-\$51,620	53.4	25.1	\$1,273,439	\$1,246,137
	All-Electric + EE	-88,410	12,677	45.9	5%	-\$1,265,064	\$45,918	\$20,860	>1	>1	\$1,310,982	\$1,285,924
	Äll-Electric + EE + PVB	38,115	12,677	73.5	5%	-\$1,080,068	\$296,233	\$317,296	>1	>1	\$1,376,301	\$1,397,365
	All-Electric + HE	118,284	12,677	41.2	-11%	-\$1,283,243	-\$83,994	-\$44,505	15.3	28.8	\$1,199,249	\$1,238,738
Small	Mixed Fuel + 3kW	4,785	0	0.9	n/ə	\$5,566	\$8,927	\$10,332	1.6	1.9	\$3,361	\$4,766
Hotel	Mixed Fuel + 3kW + 5kWh	4,785	0.	0.9	n/a	\$8,356	\$8,927	\$10,332	1,1	1.2	\$571	\$1,976
w.	Mixed Fuel + 80kW	127,592	0	25.0	n/a	\$148,427	\$229,794	\$275,130	1.5	1.9	\$81,367	\$126,703
	Mixed Fuel + 80kW + 50kWh	126,332	0	28.1	n/a	\$176,327	\$236,570	\$296,058	1.3	1.7	\$60,243	\$119,731
	All-Electric + 3kW	113,954	12,677	40.9	n/a	-\$1,292,191	-\$14,447	-\$41,288	89.4	31.3	\$1,277,744	\$1,250,902
	All-Electric + 3kW + 5kWh	113,954	12,677	40.9	n/a	-\$1,289,401	-\$14,447	-\$41,288	89.3	31.2	\$1,274,954	\$1,248,112
	All-Electric + 80kW	8,853	12,677	65:0	n/a	-\$1,149,330	\$222,070	\$223,510	>1	>1	\$1,371,400	\$1,372,840
	All-Electric + 80kW + 50kWh	7,849	12,677	67.4	n/a	-\$1,121,430	\$223,812	\$239,632	>1	>1	\$1,345,241	\$1,361,062



A STATEWIDE UTILITY PROGRAM

Title 24, Parts 6 and 11 Local Energy Efficiency Ordinances

2019 Cost-effectiveness Study: Low-Rise Residential New Construction

> Prepared for: Kelly Cunningham

Codes and Standards Program Pacific Gas and Electric Company

Prepared by:

Frontier Energy, Inc. Misti Bruceri & Associates, LLC

Last Modified: August 01, 2019

LEGAL NOTICE

This report was prepared by Pacific Gas and Electric Company and funded by the California utility customers under the auspices of the California Public Utilities Commission.

Copyright 2019, Pacific Gas and Electric Company. All rights reserved, except that this document may be used, copied, and distributed without modification.

Neither PG&E nor any of its employees makes any warranty, express or implied; or assumes any legal liability or responsibility for the accuracy, completeness or usefulness of any data, information, method, product, policy or process disclosed in this document; or represents that its use will not infringe any privately-owned rights including, but not limited to, patents, trademarks or copyrights.

Table of Contents

10	cronym	s	, ,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	5
L		•	ion	
-			ology and Assumptions	
	2.1		ding Prototypes	
	2.2	Mea	sure Analysis	
	2.2.:	1	Federal Preemption	4
	2.2.2	2	Energy Design Rating	4
	2.2.3	3	Energy Efficiency Measures	5
	2.3	Pacl	kage Development	8
	2.3.3	1.	Solar Photovoltaics (PV)	8
	2.3.2	2	Energy Storage (Batteries)	8
	2.4	Incr	emental Costs	9
	2.5	Cost	t-effectiveness	L3
	2.5.	1	On-Bill Customer Lifecycle Cost	L3
	2.5.	2	TDV Lifecycle Cost	15
	2.6	Elec	trification Evaluation	L5
	2.7	Gre	enhouse Gas Emissions	18
3	Resi	ults		18
	3.1		and Battery System Sizing	
	3.2	Sing	ele Family Results	
	3.2.	1	GHG Emission Reductions	26
	3.3	Mul	tifamily Results	26
	3.3.	1	GHG Emission Reductions	32
	3.4	Elec	trification Results	32
	3.4.	1	Single Family	33
	3.4.	2.	Multifamily	33
4	Con	clusio	ons & Summary	11
5	Refe	erenc	es	14
			California Climate Zone Map	
			Utility Tariff Details	
			Single Family Detailed Results	
			Single Family Measure Summary	
			Multifamily Detailed Results	
			Multifamily Measure Summary	
4	ppcnul	v a –	NESULO DY CHIRACE LUITE	1 ゴ

List of Tables

Table 1: Prototype Characteristics	2
Table 2: Characteristics of the Mixed Fuel vs All-Electric Prototype	3
Table 3: Lifetime of Water Heating & Space Conditioning Equipment Measures	9
Table 4: Incremental Cost Assumptions	
Table 5: IOU Utility Tariffs Applied Based on Climate Zone	
Table 6: Incremental Costs – All-Electric Code Compliant Home Compared to a Mixed Fuel Code Compliant Hor	
Table 7: PV & Battery Sizing Details by Package Type	
Table 8: Single Family Package Lifetime Incremental Costs	
Table 9: Single Family Package Cost-Effectiveness Results for the Mixed Fuel Case 1,2	23
Table 10: Single Family Package Cost-Effectiveness Results for the All-Electric Case ^{1,2}	
Table 11: Multifamily Package Incremental Costs per Dwelling Unit	
Table 12: Multifamily Package Cost-Effectiveness Results for the Mixed Fuel Case ^{1,2}	29
Table 13: Multifamily Package Cost-effectiveness Results for the All-Electric Case ^{1,2}	20
Table 14: Single Family Electrification Results	
Table 15: Comparison of Single Family On-Bill Cost Effectiveness Results with Additional PV	26
Table 16: Multifamily Electrification Results (Per Dwelling Unit)	
Table 18: Summary of Single Family Target EDR Margins	
Table 19: Summary of Multifamily Target EDR Margins	
Table 20: PG&E Baseline Territory by Climate Zone	
Table 21: SCE Baseline Territory by Climate Zone	
Table 22: SoCalGas Baseline Territory by Climate Zone	
Table 23: SDG&E Baseline Territory by Climate Zone	
Table 24: Real Utility Rate Escalation Rate Assumptions	
Table 25: Single Family Mixed Fuel Efficiency Package Cost-Effectiveness Results	
Table 26: Single Family Mixed Fuel Efficiency & PV/Battery Package Cost-Effectiveness Results	
Table 27: Single Family All-Electric Efficiency Package Cost-Effectiveness Results	
Table 28: Single Family All-Electric Efficiency & PV-PV/Battery Package Cost-Effectiveness Results	
Table 29: Single Family Mixed Fuel Efficiency – Non-Preempted Package Measure Summary	
Table 30: Single Family Mixed Fuel Efficiency – Equipment, Preempted Package Measure Summary	
Table 31: Single Family Mixed Fuel Efficiency & PV/Battery Package Measure Summary	
Table 32: Single Family All-Electric Efficiency – Non-Preempted Package Measure Summary	
Table 33: Single Family All-Electric Efficiency – Equipment, Preempted Package Measure Summary	65
Table 34: Single Family All-Electric Efficiency & PV Package Measure Summary	66
Table 35: Single Family All-Electric Efficiency & PV/Battery Package Measure Summary	67
Table 36: Multifamily Mixed Fuel Efficiency Package Cost-Effectiveness Results	. 68
Table 37: Multifamily Mixed Fuel Efficiency & PV/Battery Package Cost-Effectiveness Results	. 69
Table 38: Multifamily All-Electric Efficiency Package Cost-Effectiveness Results	. 70
Table 39: Multifamily All-Electric Efficiency & PV-PV/Battery Package Cost-Effectiveness Results	. 71
Table 40: Multifamily Mixed Fuel Efficiency – Non-Preempted Package Measure Summary	
Table 41: Multifamily Mixed Fuel Efficiency – Equipment, Preempted Package Measure Summary	
Table 42: Multifamily Mixed Fuel Efficiency & PV/Battery Package Measure Summary	
Table 43: Multifamily All-Electric Efficiency – Non-Preempted Package Measure Summary	
Table 44: Multifamily All-Electric Efficiency – Equipment, Preempted Package Measure Summary	
Table 45: Multifamily All-Electric Efficiency & PV Package Measure Summary	
Table 46: Multifamily All-Electric Efficiency & PV/Battery Package Measure Summary	
Table 47: Single Family Climate Zone 1 Results Summary	

Table 48: Multifamily Climate Zone 1 Results Summary (Per Dwelling Unit)	81
Table 49: Single Family Climate Zone 2 Results Summary	82
Table 49: Single Family Climate Zone 2 Results Summary	83
Table 51: Single Family Climate Zone 3 Results Summary	84
Table 52: Multifamily Climate Zone 3 Results Summary (Per Dwelling Unit)	85
Table 53; Single Family Climate Zone 4 Results Summary	86
Table 54: Multifamily Climate Zone 4 Results Summary (Per Dwelling Unit)	87
Table 55: Single Family Climate Zone 5 PG&E Results Summary	88
Table 56: Multifamily Climate Zone 5 PG&E Results Summary (Per Dwelling Unit)	89
Table 57: Single Family Climate Zone 5 PG&E/SoCalGas Results Summary	90
Table 58: Multifamily Climate Zone 5 PG&E/SoCalGas Results Summary (Per Dwelling Unit)	
Table 59: Single Family Climate Zone 6 Results Summary	92
Table 60: Multifamily Climate Zone 6 Results Summary (Per Dwelling Unit)	93
Table 61: Single Family Climate Zone 7 Results Summary	94
Table 62: Multifamily Climate Zone 7 Results Summary (Per Dwelling Unit)	95
Table 63: Single Family Climate Zone 8 Results Summary	96
Table 64: Multifamily Climate Zone 8 Results Summary (Per Dwelling Unit)	97
Table 65: Single Family Climate Zone 9 Results Summary	
Table 66: Multifamily Climate Zone 9 Results Summary (Per Dwelling Unit)	
Table 67: Single Family Climate Zone 10 SCE/SoCalGas Results Summary	
Table 68: Multifamily Climate Zone 10 SCE/SoCalGas Results Summary (Per Dwelling Unit)	
Table 69: Single Family Climate Zone 10 SDGE Results Summary	
Table 70: Multifamily Climate Zone 10 SDGE Results Summary (Per Dwelling Unit)	
Table 71: Single Family Climate Zone 11 Results Summary	
Table 72: Multifamily Climate Zone 11 Results Summary (Per Dwelling Unit)	
Table 73: Single Family Climate Zone 12 Results Summary	
Table 74: Multifamily Climate Zone 12 Results Summary (Per Dwelling Unit)	
Table 75: Single Family Climate Zone 13 Results Summary	
Table 76: Multifamily Climate Zone 13 Results Summary (Per Dwelling Unit)	
Table 77: Single Family Climate Zone 14 SCE/SoCalGas Results Summary	
Table 78: Multifamily Climate Zone 14 SCE/SoCalGas Results Summary (Per Dwelling Unit)	
Table 79: Single Family Climate Zone 14 SDGE Results Summary	
Table 80: Multifamily Climate Zone 14 SDGE Results Summary (Per Dwelling Unit)	
Table 81: Single Family Climate Zone 15 Results Summary	
Table 82: Multifamily Climate Zone 15 Results Summary (Per Dwelling Unit)	
Table 83: Single Family Climate Zone 16 Results Summary	
Table 84: Multifamily Climate Zone 16 Results Summary (Per Dwelling Unit)	11/
List of Figures	
Figure 1: Graphical description of EDR scores (courtesy of Energy Code Ace)	5
Figure 2: B/C ratio comparison for PV and battery sizing	
Figure 3: Single family Total EDR comparison	
Figure 4: Single family EDR Margin comparison (based on Efficiency EDR Margin for the Efficiency package	
the Total EDR Margin for the Efficiency & PV and Efficiency & PV/Battery packages)	
Figure 5: Single family greenhouse gas emissions comparison	
Figure 6: Multifamily Total EDR comparison	
Figure 7: Multifamily EDR Margin comparison (based on Efficiency EDR Margin for the Efficiency package	
the Total EDR Margin for the Efficiency & PV and Efficiency & PV/Battery packages)	31
Figure 8: Multifamily greenhouse gas emissions comparison	32

2019 Energy	Efficiency	Ordinance	Cost-effectivene	ss Study
LULU LILLIUY	LITTLICITION	Of amarice	COSE CITECTIVETIC	JJ JEHHAY

Figure 9: B/C ratio results for a single family all-electric code compliant home versus a mixed fuel code compliant	
home)
Figure 10: B/C ratio results for the single family Efficiency & PV all-electric home versus a mixed fuel code	
compliant home	1
Figure 11: B/C ratio results for the single family neutral cost package all-electric home versus a mixed fuel code	
compliant home33	7
Figure 12: B/C ratio results for a multifamily all-electric code compliant home versus a mixed fuel code	
compliant home)
Figure 13: B/C ratio results for the multifamily Efficiency & PV all-electric home versus a mixed fuel code	
compliant home4)
Figure 14: B/C ratio results for the multifamily neutral cost package all-electric home versus a mixed fuel code	
compliant home4	1
Figure 15: Map of California Climate Zones (courtesy of the California Energy Commission)	õ

Acronyms

2020 PV\$ Present value costs in 2020

ACH50 Air Changes per Hour at 50 pascals pressure differential

ACM Alternative Calculation Method

AFUE Annual Fuel Utilization Efficiency

B/C Lifecycle Benefit-to-Cost Ratio

BEopt Building Energy Optimization Tool

BSC Building Standards Commission

CAHP California Advanced Homes Program

CBECC-Res Computer program developed by the California Energy Commission for use in demonstrating

compliance with the California Residential Building Energy Efficiency Standards

CFI California Flexible Installation

CFM Cubic Feet per Minute

CMFNH California Multifamily New Homes

CO₂ Carbon Dioxide

CPC California Plumbing Code

CZ California Climate Zone

DHW Domestic Hot Water

DOE Department of Energy

DWHR Drain Water Heat Recovery

EDR Energy Design Rating

EER Energy Efficiency Ratio

EF Energy Factor
GHG Greenhouse G

GHG Greenhouse Gas

HERS Rater Home Energy Rating System Rater

HPA High Performance Attic
HPWH Heat Pump Water Heater

HSPF Heating Seasonal Performance Factor

HVAC Heating, Ventilation, and Air Conditioning

IECC International Energy Conservation Code

IOU Investor Owned Utility

kBtu kilo-British thermal unit

kWh Kilowatt Hour

LBNL Lawrence Berkeley National Laboratory

2019 Energy Efficiency Ordinance Cost-effectiveness Study

LCC Li

Lifecycle Cost

LLAHU

Low Leakage Air Handler Unit

VLLDCS

Verified Low Leakage Ducts in Conditioned Space

MF

Multifamily

NAECA

National Appliance Energy Conservation Act

NEEA

Northwest Energy Efficiency Alliance

NEM

Net Energy Metering

NPV

Net Present Value

NREL

National Renewable Energy Laboratory

PG&E

Pacific Gas and Electric Company

PV

Photovoltaic

SCE

Southern California Edison

SDG&E

San Diego Gas and Electric

SEER

Seasonal Energy Efficiency Ratio

SF

Single Family

CASE

Codes and Standards Enhancement

TDV

Time Dependent Valuation

Therm

Unit for quantity of heat that equals 100,000 British thermal units

Title 24

Title 24, Part 6

TOU

Time-Of-Use

UEF

Uniform Energy Factor

ZNE

Zero-net Energy

1 Introduction

The California Building Energy Efficiency Standards Title 24, Part 6 (Title 24) (Energy Commission, 2018b) is maintained and updated every three years by two state agencies, the California Energy Commission (Energy Commission) and the Building Standards Commission (BSC). In addition to enforcing the code, local jurisdictions have the authority to adopt local energy efficiency ordinances, or reach codes, that exceed the minimum standards defined by Title 24 (as established by Public Resources Code Section 25402.1(h)2 and Section 10-106 of the Building Energy Efficiency Standards). Local jurisdictions must demonstrate that the requirements of the proposed ordinance are cost-effective and do not result in buildings consuming more energy than is permitted by Title 24. In addition, the jurisdiction must obtain approval from the Energy Commission and file the ordinance with the BSC for the ordinance to be legally enforceable.

This report documents cost-effective combinations of measures that exceed the minimum state requirements, the 2019 Building Energy Efficiency Standards, effective January 1, 2020, for new single family and low-rise (one-to three-story) multifamily residential construction. The analysis includes evaluation of both mixed fuel and all-electric homes, documenting that the performance requirements can be met by either type of building design. Compliance package options and cost-effectiveness analysis in all sixteen California climate zones (CZs) are presented (see Appendix A — California Climate Zone Map for a graphical depiction of Climate Zone locations). All proposed package options include a combination of efficiency measures and on-site renewable energy.

2 Methodology and Assumptions

This analysis uses two different metrics to assess cost-effectiveness. Both methodologies require estimating and quantifying the incremental costs and energy savings associated with energy efficiency measures. The main difference between the methodologies is the manner in which they value energy and thus the cost savings of reduced or avoided energy use.

- <u>Utility Bill Impacts (On-Bill)</u>: Customer-based Lifecycle Cost (LCC) approach that values energy based upon estimated site energy usage and customer on-bill savings using electricity and natural gas utility rate schedules over a 30-year duration accounting for discount rate and energy cost inflation.
- Time Dependent Valuation (TDV): Energy Commission LCC methodology, which is intended to capture the "societal value or cost" of energy use including long-term projected costs such as the cost of providing energy during peak periods of demand and other societal costs such as projected costs for carbon emissions, as well as grid transmission and distribution impacts. This metric values energy use differently depending on the fuel source (gas, electricity, and propane), time of day, and season. Electricity used (or saved) during peak periods has a much higher value than electricity used (or saved) during off-peak periods (Horii et al., 2014). This is the methodology used by the Energy Commission in evaluating cost-effectiveness for efficiency measures in Title 24, Part 6.

2.1 Building Prototypes

The Energy Commission defines building prototypes which it uses to evaluate the cost-effectiveness of proposed changes to Title 24 requirements. At the time that this report was written, there are two single family prototypes and one low-rise multifamily prototype. All three are used in this analysis in development of the above-code packages. Table 1 describes the basic characteristics of each prototype. Additional details on the prototypes can be found in the Alternative Calculation Method (ACM) Approval Manual (Energy Commission, 2018a). The prototypes have equal geometry on all walls, windows and roof to be orientation neutral.



Table 1: Prototype Characteristics

,	1 2 X O CO Cy p O City		
Characteristic	Single Family One-Story	Single Family Two-Story	Multifamily
			6,960 ft ² :
Conditioned Floor Area	2,100 ft ²	2,700 ft ²	(4) 780 ft ² &
			(4) 960 ft ² units
Num. of Stories	1	2, 4	2
			(4) 1-bed &
Num. of Bedrooms	3	3 (1) (1) (1) (1) (1) (1) (1) (1) (1) (1)	(4) 2-bed units
Window-to-Floor Area Ratio	20%	20%	15%

Source: 2019 Alternative Calculation Method Approval Manual (California Energy Commission, 2018a).

The Energy Commission's protocol for single family prototypes is to weight the simulated energy impacts by a factor that represents the distribution of single-story and two-story homes being built statewide, assuming 45 percent single-story and 55 percent two-story. Simulation results in this study are characterized according to this ratio, which is approximately equivalent to a 2,430-square foot (ft²) house.¹

The methodology used in the analyses for each of the prototypical building types begins with a design that precisely meets the minimum 2019 prescriptive requirements (zero compliance margin). Table 150.1-A in the 2019 Standards (Energy Commission, 2018b) lists the prescriptive measures that determine the baseline design in each climate zone. Other features are consistent with the Standard Design in the ACM Reference Manual (Energy Commission, 2019), and are designed to meet, but not exceed, the minimum requirements. Each prototype building has the following features:

- Slab-on-grade foundation.
- Vented attic.
- High performance attic in climate zones where prescriptively required (CZ 4, 8-16) with insulation installed at the ceiling and below the roof deck per Option B. (Refer to Table 150.1-A in the 2019 Standards.)
- Ductwork located in the attic for single family and within conditioned space for multifamily.

Both mixed fuel and all-electric prototypes are evaluated in this study. While in past code cycles an all-electric home was compared to a home with gas for certain end-uses, the 2019 code includes separate prescriptive and performance paths for mixed-fuel and all-electric homes. The fuel specific characteristics of the mixed fuel and all-electric prototypes are defined according to the 2019 ACM Reference Manual and described in Table 2.²

² Standards Section 150.1(c)8.A.iv.a specifies that compact hot water distribution design and a drain water heat recovery system or extra PV capacity are required when a heat pump water heater is installed prescriptively. The efficiency of the distribution and the drain water heat recovery systems as well as the location of the water heater applied in this analysis are based on the Standard Design assumptions in CBECC-Res which result in a zero-compliance margin for the 2019 basecase model.



 $^{^{1}}$ 2,430 ft² = (45% x 2,100 ft²) + (55% x 2,700 ft²)

Table 2: Characteristics of the Mixed Fuel vs All-Electric Prototype

Lable 2. Charac	teristics of the mixed rue	ei vs Au-Electric Prototype
Characteristic	Mixed Fuel	All-Electric
	Gas furnace 80 AFUE	Split heat pump 8.2 HSPF,
Space Heating/Cooling ¹	Split A/C 14 SEER, 11.7 EER	14 SEER, 11.7 EER
\$ 15 miles		50gal HPWH UEF = 2.0
Water Heater ^{1,2,3,4}	Gas tankless UEF = 0.81	SF: located in the garage
water neater	Gas lankiess OEF - 0.01	MF CZ 2,4,6-16: located in living space
		MF CZ 1,3,5: located in exterior closet
		Basic compact distribution credit,
	Code minimum. All hot water	(CZ,6-8,15)
Hot Water Distribution	lines insulated	Expanded compact distribution credit,
	inies libulated	compactness factor = 0.6
		(CZ 1-5,9-14,16)
Drain Water Heat	X.	CZ 1: unequal flow to shower = 42%
Recovery	None	CZ 16: equal flow to shower & water
Efficiency	41000	heater = 65%
Elizabeth Cashe, results to be a second of a	iniste was et a com en en la contrata de la side de la secondada de la seconda	None in other CZs
Cooking	Gas	Electric
Clothes Drying	Gas	Electric

Eguipment efficiencies are equal to minimum federal appliance efficiency standards.

2.2 Measure Analysis

The California Building Energy Code Compliance simulation tool, CBECC-RES 2019.1.0, was used to evaluate energy impacts using the 2019 Title 24 prescriptive standards as the benchmark, and the 2019 TDV values. TDV is the energy metric used by the Energy Commission since the 2005 Title 24 energy code to evaluate compliance with the Title 24 standards.

Using the 2019 baseline as the starting point, prospective energy efficiency measures were identified and modeled in each of the prototypes to determine the projected energy (Therm and kWh) and compliance impacts. A large set of parametric runs were conducted to evaluate various options and develop packages of measures that exceed minimum code performance. The analysis utilizes a parametric tool based on Micropas³ to automate and manage the generation of CBECC-Res input files. This allows for quick evaluation of various efficiency measures across multiple climate zones and prototypes and improves quality control. The batch process functionality of CBECC-Res is utilized to simulate large groups of input files at once. Annual utility costs were calculated using hourly data output from CBECC-Res and electricity and natural gas tariffs for each of the investor owned utilities (IOUs).

³ Developed by Ken Nittler of Enercomp, Inc.



2019-08-01

The multifamily prototype is evaluated with individual water heaters. HPWHs located in the living space do not have ducting for either inlet or exhaust air; CBECC-Res does not have the capability to model ducted HPWHs.

^{*}UEF = uniform energy factor. HPWH = heat pump water heater: SF = single family: MF = multifamily.

⁴CBECC-Res applies a 50gal water heater when specifying a storage water heater. Hot water draws differ between the prototypes based on number of bedrooms.

The Reach Codes Team selected packages and measures based on cost-effectiveness as well as decades of experience with residential architects, builders, and engineers along with general knowledge of the relative acceptance of many measures.

2.2.1 Federal Preemption

The Department of Energy (DOE) sets minimum efficiency standards for equipment and appliances that are federally regulated under the National Appliance Energy Conservation Act (NAECA), including heating, cooling, and water heating equipment. Since state and local governments are prohibited from adopting policies that mandate higher minimum efficiencies than the federal standards require, the focus of this study is to identify and evaluate cost-effective packages that do not include high efficiency equipment. While this study is limited by federal preemption, in practice builders may use any package of compliant measures to achieve the performance goals, including high efficiency appliances. Often, these measures are the simplest and most affordable measures to increase energy performance.

2.2.2 Energy Design Rating

The 2019 Title 24 code introduces California's Energy Design Rating (EDR) as the primary metric to demonstrate compliance with the energy code. EDR is still based on TDV but it uses a building that is compliant with the 2006 International Energy Conservation Code (IECC) as the reference building. The reference building has an EDR score of 100 while a zero-net energy (ZNE) home has an EDR score of zero (Energy Commission, 2018d). See Figure 1 for a graphical representation of this. While the Reference Building is used to determine the rating, the Proposed Design is still compared to the Standard Design based on the prescriptive baseline assumptions to determine compliance.

The EDR is calculated by CBECC-Res and has two components:

- 1. An "Efficiency EDR" which represents the building's energy use without solar generation.⁴
- 2. A "Total EDR" that represents the final energy use of the building based on the combined impact of efficiency measures, PV generation and demand flexibility.

For a building to comply, two criteria are required:

- (1) the proposed Efficiency EDR must be equal to or less than the Efficiency EDR of the Standard Design, and
- (2) the proposed Total EDR must be equal to or less than the Total EDR of the Standard Design.

Single family prototypes used in this analysis that are minimally compliant with the 2019 Title 24 code achieve a Total EDR between 20 and 35 in most climates.

This concept, consistent with California's "loading order" which prioritizes energy efficiency ahead of renewable generation, requires projects meet a minimum Efficiency EDR before PV is credited but allows for PV to be traded off with additional efficiency when meeting the Total EDR. A project may improve on building efficiency beyond the minimum required and subsequently reduce the PV generation capacity required to achieve the required Total EDR but may not increase the size of the PV system and trade this off with a reduction of efficiency measures. Figure 1 graphically summarizes how both Efficiency EDR and PV / demand flexibility EDR are used to calculate the Total EDR used in the 2019 code and in this analysis.

⁴ While there is no compliance credit for solar PV as there is under the 2016 Standards, the credit for installing electric storage battery systems that meet minimum qualifications can be applied to the Efficiency EDR.



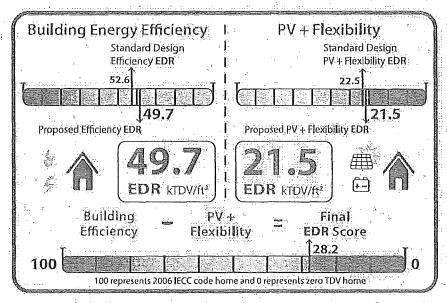


Figure 1: Graphical description of EDR scores (courtesy of Energy Code Ace5)

Results from this analysis are presented as EDR Margin, a reduction in the EDR score relative to the Standard Design. EDR Margin is a better metric to use than absolute EDR in the context of a reach code because absolute values vary, based on the home design and characteristics such as size and orientation. This approach aligns with how compliance is determined for the 2019 Title 24 code, as well as utility incentive programs, such as the California Advanced Homes Program (CAHP) & California Multifamily New Homes (CMFNH), which require minimum performance criteria based on an EDR Margin for low-rise residential projects. The EDR Margin is calculated according to Equation 1 for the two efficiency packages and Equation 2 for the Efficiency & PV and Efficiency & PV/Battery packages (see Section 2.3).

Equation 1

 $EDR\ Margin_{efficiency} = Standard\ Design\ Efficiency\ EDR - Proposed\ Design\ Efficiency\ EDR$

Equation 2

EDR $Margin_{efficiency \& PV} = Standard$ Design Total EDR - Proposed Design Total EDR

2,2,3 Energy Efficiency Measures

Following are descriptions of each of the efficiency measures evaluated under this analysis. Because not all of the measures described below were found to be cost-effective and cost-effectiveness varied by climate zone, not all measures are included in all packages and some of the measures listed are not included in any final package. For a list of measures included in each efficiency package by climate zone, see Appendix D — Single Family Measure Summary and Appendix F.—Multifamily Measure Summary.

Reduced Infiltration (ACH50): Reduce infiltration in single family homes from the default infiltration assumption of five (5) air changes per hour at 50 Pascals (ACH50)⁶ by 40 to 60 percent to either 3 ACH50 or 2 ACH50. HERS

⁶ Whole house leakage tested at a pressure difference of 50 Pascals between indoors and outdoors.



5

2019-08-01

⁵ https://energycodeace.com/

rater field verification and diagnostic testing of building air leakage according to the procedures outlined in the 2019 Reference Appendices RA3.8 (Energy Commission, 2018c). This measure was not applied to multifamily homes because CBECC-Res does not allow reduced infiltration credit for multifamily buildings.

Improved Fenestration: Reduce window U-factor to 0.24. The prescriptive U-factor is 0.30 in all climates. In climate zones 1, 3, 5, and 16 where heating loads dominate, an increase in solar heat gain coefficient (SHGC) from the default assumption of 0.35 to 0.50 was evaluated in addition to the reduction in U-factor.

<u>Cool Roof</u>: Install a roofing product that's rated by the Cool Roof Rating Council to have an aged solar reflectance (ASR) equal to or greater than 0.25. Steep-sloped roofs were assumed in all cases. Title 24 specifies a prescriptive ASR of 0.20 for Climate Zones 10 through 15 and assumes 0.10 in other climate zones.

Exterior Wall Insulation: Decrease wall U-factor in 2x6 walls to 0.043 from the prescriptive requirement of 0.048 by increasing exterior insulation from one-inch R-5 to 1-1/2 inch R-7.5. This was evaluated for single family buildings only in all climate zones except 6 and 7 where the prescriptive requirement is higher (U-factor of 0.065) and improving beyond the prescriptive value has little impact.

High Performance Attics (HPA): HPA with R-38 ceiling insulation and R-30 insulation under the roof deck. In climates where HPA is already required prescriptively this measure requires an incremental increase in roof insulation from R-19 or R-13 to R-30. In climates where HPA is not currently required (Climate Zones 1 through 3, and 5 through 7), this measure adds roof insulation to an uninsulated roof as well as increasing ceiling insulation from R-30 to R-38 in Climate Zones 3, 5, 6 and 7.

<u>Slab Insulation:</u> Install R-10 perimeter slab insulation at a depth of 16-inches. For climate zone 16, where slab insulation is required, prescriptively this measure increases that insulation from R-7 to R-10.

<u>Duct Location (Ducts in Conditioned Space):</u> Move the ductwork and equipment from the attic to inside the conditioned space in one of the three following ways.

- 1. Locate ductwork in conditioned space. The air handler may remain in the attic provided that 12 linear feet or less of duct is located outside the conditioned space including the air handler and plenum. Meet the requirements of 2019 Reference Appendices RA3.1.4.1.2. (Energy Commission, 2018c)
- 2. All ductwork and equipment located entirely in conditioned space meeting the requirements of 2019 Reference Appendices RA3.1.4.1.3. (Energy Commission, 2018c)
- 3. All ductwork and equipment located entirely in conditioned space with ducts tested to have less than or equal to 25 cfm leakage to outside. Meet the requirements of Verified Low Leakage Ducts in Conditioned Space (VLLDCS) in the 2019 Reference Appendices RA3.1.4.3.8. (Energy Commission, 2018c)

Option 1 and 2 above apply to single family only since the basecase for multifamily assumes ducts are within conditioned space. Option 3 applies to both single family and multifamily cases.

Reduced Distribution System (Duct) Leakage: Reduce duct leakage from 5% to 2% and install a low leakage air handler unit (LLAHU). This is only applicable to single family homes since the basecase for multifamily assumes ducts are within conditioned space and additional duct leakage credit is not available.

Low Pressure Drop Ducts: Upgrade the duct distribution system to reduce external static pressure and meet a maximum fan efficacy of 0.35 Watts per cfm for gas furnaces and 0.45 Watts per cfm for heat pumps operating at full speed. This may involve upsizing ductwork, reducing the total effective length of ducts, and/or selecting low pressure drop components such as filters. Fan watt draw must be verified by a HERS rater according to the procedures outlined in the 2019 Reference Appendices RA3.3 (Energy Commission, 2018c). New federal regulations that went into effect July 3, 2019 require higher fan efficiency for gas furnaces than for heat pumps and air handlers, which is why the recommended specification is different for mixed fuel and all-electric homes.



HERS Verification of Hot Water Pipe Insulation: The California Plumbing Code (CPC) requires pipe insulation on all hot water lines. This measure provides credit for HERS rater verification of pipe insulation requirements according to the procedures outlined in the 2019 Reference Appendices RA3.6.3. (Energy Commission, 2018c)

Compact Hot Water Distribution: Two credits for compact hot water distribution were evaluated.

- 1. <u>Basic Credit</u>: Design the hot water distribution system to meet minimum requirements for the basic compact hot water distribution credit according to the procedures outlined in the 2019 Reference
- Appendices RA4.4.6 (Energy Commission, 2018c). In many single family homes this may require moving the water heater from an exterior to an interior garage wall. Multifamily homes with individual water heaters are expected to easily meet this credit with little or no alteration to plumbing design. CBECC-Res software assumes a 30% reduction in distribution losses for the basic credit.
- 2. Expanded Credit: Design the hot water distribution system to meet minimum requirements for the expanded compact hot water distribution credit according to the procedures outlined in the 2019 Reference Appendices RA3.6.5 (Energy Commission, 2018c). In addition to requiring HERS verification that the minimum requirements for the basic compact distribution credit are met, this credit also imposes limitations on pipe location, maximum pipe diameter, and recirculation system controls allowed.

<u>Drain Water Heat Recovery (DWHR)</u>: For multifamily buildings add DWHR that serves the showers in an unequal flow configuration (pre-heated water is piped directly to the shower) with 50% efficiency. This upgrade assumes all apartments are served by a DWHR with one unit serving each apartment individually. For a slab-on-grade building this requires a horizontal unit for the first-floor apartments.

Federally Preempted Measures:

The following additional measures were evaluated. Because these measures require upgrading appliances that are federally regulated to high efficiency models, they cannot be used to show cost-effectiveness in a local ordinance. The measures and packages are presented here to show that there are several options for builders to meet the performance targets. Heating and cooling capacities are autosized by CBECC-Res in all cases.

High Efficiency Furnace: For the mixed-fuel prototypes, upgrade natural gas furnace to one of two condensing furnace options with an efficiency of 92% or 96% AFUE.

<u>High Efficiency Air Conditioner</u>: For the mixed-fuel prototypes, upgrade the air conditioner to either single-stage SEER 16 / EER 13 or two-stage SEER 18 / EER 14 equipment.

High Efficiency Heat Pump: For the all-electric prototypes, upgrade the heat pump to either single-stage SEER 16 / EER 13 / HSPF 9 or two-stage SEER 18 / EER 14 / HSPF 10 equipment.

<u>High Efficiency Tankless Water Heater</u>: For the mixed-fuel prototype, upgrade tankless water heater to a condensing unit with a rated Uniform Energy Factor (UEF) of 0.96.

High Efficiency Heat Pump Water Heater (HPWH): For the all-electric prototypes, upgrade the federal minimum heat pump water heater to a HPWH that meets the Northwest Energy Efficiency Alliance (NEEA)⁷ Tier 3 rating, The evaluated NEEA water heater is an 80gal unit and is applied to all three building prototypes. Using the same

⁷ Based on operational challenges experienced in the past, NEEA established rating test criteria to ensure newly installed HPWHs perform adequately, especially in colder climates. The NEEA rating requires an Energy Factor equal to the ENERGY STAR performance level and includes requirements regarding noise and prioritizing heat pump use over supplemental electric resistance heating.



water heater provides consistency in performance across all the equipment upgrade cases, even though hot water draws differ across the prototypes.

2.3 Package Development

Three to four packages were evaluated for each prototype and climate zone, as described below.

- 1) <u>Efficiency Non-Preempted</u>: This package uses only efficiency measures that don't trigger federal preemption issues including envelope, and water heating and duct distribution efficiency measures.
- 2) <u>Efficiency Equipment, Preempted</u>: This package shows an alternative design that applies HVAC and water heating equipment that are more efficient than federal standards. The Reach Code Team considers this more reflective of how builders meet above code requirements in practice.
- 3) Efficiency & PV: Using the Efficiency—Non-Preempted Package as a starting point⁸, PV capacity is added to offset most of the estimated electricity use. This only applies to the all-electric case, since for the mixed fuel cases, 100% of the projected electricity use is already being offset as required by 2019 Title 24, Part 6.
- 4) <u>Efficiency & PV/Battery</u>: Using the Efficiency & PV Package as a starting point, PV capacity is added as well as a battery system.

2.3.1 Solar Photovoltaics (PV)

Installation of on-site PV is required in the 2019 residential code. The PV sizing methodology in each package was developed to offset annual building electricity use and avoid oversizing which would violate net energy metering (NEM) rules. In all cases, PV is evaluated in CBECC-Res according to the California Flexible Installation (CFI) assumptions.

The Reach Code Team used two options within the CBECC-Res software for sizing the PV system, described below. Analysis was conducted to determine the most appropriate sizing method for each package which is described in the results.

- Standard Design PV the same PV capacity as is required for the Standard Design case¹⁰
- Specify PV System Scaling a PV system sized to offset a specified percentage of the estimated electricity use of the Proposed Design case

2.3.2 Energy Storage (Batteries)

A battery system was evaluated in CBECC-Res with control type set to "Time of Use" and with default efficiencies of 95% for both charging and discharging. The "Time of Use" option assumes batteries are charged anytime PV generation is greater than the house load but controls when the battery storage system discharges. During the summer months (July – September) the battery begins to discharge at the beginning of the peak period at a maximum rate until fully discharged. During discharge the battery first serves the house load but will

¹⁰ The Standard Design PV system is sized to offset the electricity use of the building loads which are typically electric in a mixed fuel home, which includes all loads except space heating, water heating, clothes drying, and cooking.



Я

⁸ In cases where there was no cost-effective Efficiency – Non-Preempted Package, the most cost-effective efficiency measures for that climate zone were also included in the Efficiency & PV Package in order to provide a combination of both efficiency and PV beyond code minimum.

⁹ NEM rules apply to the IOU territories only.

discharge to the electric grid if there is excess energy available. During other months the battery discharges whenever the PV system does not cover the entire house load and does not discharge to the electric grid. This control option is considered to be most reflective of the current products on the market. This control option requires an input for the "First Hour of the Summer Peak" and the Statewide CASE Team applied the default hour in CBECC-Res which differs by climate zone (either a 6pm or 7pm start). The Self Utilization Credit was taken when the battery system was modeled.

2.4 Incremental Costs

Table 4 below summarizes the incremental cost assumptions for measures evaluated in this study. Incremental costs represent the equipment, installation, replacement, and maintenance costs of the proposed measures relative to the base case. If Replacement costs are applied to HVAC and DHW equipment, PV inverters, and battery systems over the 30-year evaluation period. There is no assumed maintenance on the envelope, HVAC, or DHW measures since there should not be any additional maintenance cost for a more efficient version of the same system type as the baseline. Costs were estimated to reflect costs to the building owner. When costs were obtained from a source that didn't already include builder overhead and profit, a markup of ten percent was added. All costs are provided as present value in 2020 (2020 PV\$). Costs due to variations in furnace, air conditioner, and heat pump capacity by climate zone were not accounted for in the analysis.

Equipment lifetimes applied in this analysis for the water heating and space conditioning measures are summarized in Table 3.

Table 3: Lifetime of Water Heating & Space Conditioning Equipment Measures

Measure	Lifetime
Gas Furnace	20
Air Conditioner	20
Heat Pump	15
Gas Tankless Water Heater	20
Heat Pump Water Heater	15

Source: City of Pálo Alto: 2019 Title 24 Energy Reach Code Costeffectiveness Analysis Draft (TRC, 2018) which is based on the Database of Energy Efficiency Resources (DEER). 12



¹¹ Interest costs due to financing are not included in the incremental costs presented in the Table 4 but are accounted for in the lifetime cost analysis. All first costs are assumed to be financed in a mortgage, see Section 2.5 for details.

¹² http://www.deeresources.com

Table 4: Incremental Cost Assumptions

		Incremental C	ost (2020 PV\$)						
Measure	Performance Level		Multifamily (Per Dwelling Unit)	Source & Notes					
	<u> </u>	Single Family	Unit	Source & Notes					
Non-Preempt		1							
Reduced	3.0 vs 5.0 ACH50	\$391	n/a	NREL's BEopt cost database (\$0.115/ft² for 3 ACH50 & \$0.207/ft² for 2 ACH50) + \$100 HERS					
Infiltration	2.0 vs 5.0 ACH50	\$613	n/a	rater verification.					
Window U- factor	0.24 vs 0.30	\$2,261	\$607	\$4.23/ft ² window area based on analysis conducted for the 2019 and 2022 Title 24 cycles (Statewide CASE Team, 2018).					
Window SHGC	0.50 vs 0.35	\$0	. \$0	Data from CASE Report along with direct feedback from Statewide CASE Team that higher SHGC does not necessarily have any incremental cost (Statewide CASE Team, 2017d). Applies to CZ 1,3,5,16.					
Cool Roof -	0.25 vs 0.20	\$237	\$58	Costs based on 2016 Cost-effectiveness Study for Cool Roofs reach code analysis for 0.28 solar					
Aged Solar Reflectance	0.20 vs 0.10	\$0	\$0	reflectance product. (Statewide Reach Codes Team, 2017b)					
Exterior Wall Insulation	R-7.5 vs R-5	\$818	n/a	Based on increasing exterior insulation from 1" R-5 to 1.5" R-7.5 in a 2x6 wall (Statewide CASE Team; 2017c). Applies to single family only in all climates except CZ 6, 7.					
Under-Deck	R-13 vs R-0	\$1,338	\$334	Costs for R-13 (\$0.64/ft²), R-19 (\$0.78/ft²) and R-30 (\$1.61/ft²) based on data presented in the					
Roof	R-19 vs R-13	\$282	\$70-	2019 HPA CASE Report (Statewide CASE Team, 2017b) along with data collected directly from					
Insulation	R-30 vs R-19	\$1,831	\$457	builders during the 2019 CASE process. The R-30 costs include additional labor costs for					
(HPA)	R-38 vs R-30	\$585	\$146	cabling. Costs for R-38 from NREL's BEopt cost database.					
Attic Floor Insulation	R-38 vs R-30	\$584	\$146	NREL's BEopt cost database: \$0.34/ft² ceiling area					
Slab Edge	R-10 vs R-0	\$553	\$121	\$4/linear foot of slab perimeter based on internet research. Assumes 16in depth.					
Insulation	R-10 vs R-7	\$157	\$21	\$1.58/linear foot of slab perimeter based on NREL's BEopt cost database. This applies to: CZ 16 only where R-7 slab edge insulation is required prescriptively. Assumes 16in depth.					
	<12 feet in attic	\$358	n/a						
	Ducts in Conditioned Space	\$658	n/a	Costs based on a 2015 report on the Evaluation of Ducts in Conditioned Space for New					
Duct Location	Verified Low Leakage Ducts in Conditioned	\$768	\$110	California Homes (Davis Energy Group, 2015). HERS verification cost of \$100 for the Verified Low Leakage Ducts in Conditioned Space credit.					
	Space								



		Incremental C	ost (2020 PV\$)						
			Multifamily						
Measure	Performance Level	Single Family	(Per Dwelling Unit)	Source & Notes					
Distribution	2% vs 5%	\$96	:n/a:	1-hour labor. Labor rate of \$96 per hour is from 2019 RSMeans for sheet metal workers and includes an average City Cost Index for labor for California cities & 10% for overhead and profit. Applies to single family only since ducts are assumed to be in conditioned space for multifamily					
System Leakage	Low Leakage Air Handler	\$0.	n/a	Negligible cost based on review of available products. There are more than 6,000 Energy, Commission certified units and the list includes many furnace and heat pump air handler product lines from the major manufacturers, including minimum efficiency, low cost product lines.					
Low Pressure Drop Ducts	0.35 vs 0.45	\$96	\$48	Costs assume one-hour labor for single family and half-hour per multifamily apartment. Labor rate of \$96 per hour is from 2019 RSMeans for sheet metal workers and includes an average					
(Fan W/cfm)	0.45 vs 0,58	\$96	. \$48	City Cost Index for labor for California cities.					
Hot Water Pipe Insulation	HERS verified	, \$110	\$83	Cost for HERS verification only, based on feedback from HERS raters. \$100 per single family home and \$75 per multifamily unit before markup.					
Compact Hot Water	Basic credit	\$150	\$0	For single family add 20-feet venting at \$12/ft to locate water heater on interior garage wall, less 20-feet savings for less PEX and pipe insulation at \$4.88/ft. Costs from online retailers. Many multifamily buildings are expected to meet this credit without any changes to distribution design.					
Distribution	Expanded credit	n/a	\$83	Cost for HERS verification only. \$75 per multifamily unit before markup. This was only evaluated for multifamily buildings.					
Drain Water Heat Recovery	50% efficiency	n/a	\$690	Cost from the 2019 DWHR CASE Report assuming a 2-inch DWHR unit. The CASE Report multifamily costs were based on one unit serving 4 dwelling units with a central water heater. Since individual water heaters serve each dwelling unit in this analysis, the Reach Code Team used single family costs from the CASE Report. Costs in the CASE Report were based on a 45.1% efficient unit, a DWHR device that meets the 50% efficiency assumed in this analysis may cost a little more. (Statewide CASE Team, 2017a).					
Federally Pre-	empted Measur	es							
Furnace AFUE	92% vs 80%	\$139	\$139	Equipment costs from online retailers for 40-kBtu/h unit. Cost saving for 6-feet of venting at \$26/foot due to lower cost venting requirements for condensing (PVC) vs non-condensing					
Tulfiace Al OE	96% vs.80%	\$244	\$244	(stainless) furnaces. Replacement at year 20 assumes a 50% reduction in first cost. Value at year 30 based on remaining useful life is included.					
Air	16/13 vs 14/11.7	\$111	\$111	Costs from online retailers for 2-ton unit. Replacement at year 20 assumes a 50% reduction in					
Conditioner SEER/EER	18/14 vs 14/11.7			first cost. Value at year 30 based on remaining useful life is included.					



Table 4: Incremental Cost Assumptions

	· · · · · · · · · · · · · · · · · · ·		· · · · · · · · · · · · · · · · · · ·	net emental cost Assumptions
		<u>Incremental C</u>	ost (2020 PV\$)	
			Multifamily	
	Performance		(Per Dwelling	
Measure	Level	Single Family	Unit)	Source & Notes
Heat Pump	16/13/9 vs 14/11.7/8.2	\$411	\$411	Costs from online retailers for 2-ton unit. Replacement at year 15 assumes a 50% reduction in
/HSPF	18/14/10 vs 14/11.7/8.2	\$1,511	\$1,511	first cost.
Tankless Water Heater Energy Factor	0.96 vs 0.81	\$203	\$203	Equipment costs from online retailers for 40-kBtu/h unit. Cost saving for 6-feet of venting at \$26/foot due to lower cost venting requirements for condensing (PVC) vs non-condensing (stainless) furnaces. Replacement at year 15 assumes a 50% reduction in first cost.
HPWH	NEEA Tier 3 vs 2.0 EF	\$294	\$294	Equipment costs from online retailers. Replacement at year 15 assumes a 50% reduction in first cost.
PV + Battery				
				First costs are from LBNL's Tracking the Sun 2018 costs (Barbose et al., 2018) and represent costs for the first half of 2018 of \$3.50/W-DC for residential system and \$2.90/W-DC for non-
		÷	· · · · · · · · · · · · · · · · · · ·	residential system ≤500 kW-DC. These costs were reduced by 16% for the solar investment tax credit, which is the average credit over years 2020-2022.
PV System	System size varies	\$3.72/W-DC	\$3.17/W-DC	Inverter replacement cost of \$0.14/W-DC present value includes replacements at year 11 at \$0.15/W-DC (nominal) and at year 21 at \$0.12/W-DC (nominal) per the 2019 PV CASE Report
				(California Energy Commission, 2017). System maintenance costs of \$0.31/W-DC present value assume \$0.02/W-DC (nominal) annually per the 2019 PV CASE Report (California Energy Commission, 2017). 10% overhead and profit added to all costs
Battery	System size varies by building type	\$656/kWh	\$656/kWh	\$633/kWh first cost based on the PV Plus Battery Study report (Statewide Reach Codes Team, 2018) as the average cost of the three systems that were analyzed. This cost was reduced by 16% for the solar investment tax credit, which is the average credit over years 2020-2022. Replacement cost at year 15 of \$100/kWh based on target price reductions (Penn, 2018).

2.5 Cost-effectiveness

Cost-effectiveness was evaluated for all sixteen climate zones and is presented based on both TDV energy, using the Energy Commission's LCC methodology, and an On-Bill approach using residential customer utility rates. Both methodologies require estimating and quantifying the value of the energy impact associated with energy efficiency measures over the life of the measures (30 years) as compared to the prescriptive Title 24 requirements.

Results are presented as a lifecycle benefit-to-cost (B/C) ratio, a net present value (NPV) metric which represents the cost-effectiveness of a measure over a 30-year lifetime taking into account discounting of future savings and costs and financing of incremental first costs. A value of one indicates the NPV of the savings over the life of the measure is equivalent to the NPV of the lifetime incremental cost of that measure. A value greater than one represents a positive return on investment. The B/C ratio is calculated according to Equation 3:

$$\begin{array}{c} \textbf{Equation 3} \\ \textit{Benefit} - to - \textit{Cost Ratio} = \frac{\textit{NPV of lifetime benefit}}{\textit{NPV of lifetime cost}} \end{array}$$

In most cases the benefit is represented by annual utility savings or TDV savings and the cost by incremental first cost and replacement costs. However, in some cases a measure may have incremental cost savings but with increased energy related costs. In this case, the benefit is the lower first cost and the cost is the increase in utility bills. The lifetime costs or benefits are calculated according to Equation 4.

$\begin{array}{c} \text{Equation 4} \\ \textit{NPV of lifetime cost/benefit} = \sum_{t=1}^n Annual \ cost/benefit_t * (1+r)^t \end{array}$

Where:

- n = analysis term
- r = discount rate

The following summarizes the assumptions applied in this analysis to both methodologies.

- Analysis term of 30-years
- Real discount rate of 3 percent
- Inflation rate of 2 percent
- First incremental costs are financed into a 30-year mortgage
- Mortgage interest rate of 4.5 percent
- Average tax rate of 20 percent (to account for tax savings due to loan interest deductions)

2.5.1 On-Bill Customer Lifecycle Cost

Residential utility rates were used to calculate utility costs for all cases and determine On-Bill customer cost-effectiveness for the proposed packages. The Reach Codes Team obtained the recommended utility rates from each IOU based on the assumption that the reach codes go into effect January of 2020. Annual utility costs were calculated using hourly electricity and gas output from CBECC-Res and applying the utility tariffs summarized in . Table 5. Appendix B — Utility Tariff Details includes the utility rate schedules used for this study. The applicable residential time-of-use (TOU) rate was applied to all cases. Annual electricity production in excess of annual electricity consumption is credited to the utility account at the applicable wholesale rate based on the approved

¹³ Under NEM rulings by the CPUC (D-16-01-144, 1/28/16), all new PV customers shall be in an approved TOU rate structure. https://www.cpuc.ca.gov/General.aspx?id=3800



NEM2 tariffs for that utility. Minimum daily use billing and mandatory non-bypassable charges have been applied. Future change to the NEM tariffs are likely; however, there is a lot of uncertainty about what those changes will be and if they will become effective during the 2019 code cycle (2020-2022). The net surplus compensation rates for each utility are as follows:¹⁴

PG&E: \$0.0287 / kWhSCE: \$0.0301 / kWh

• SDG&E: \$0.0355 / kWh

Utility rates were applied to each climate zone based on the predominant IOU serving the population of each zone according to Two SCE tariff options were evaluated; TOU-D-4-9 and TOU-D-PRIME. The TOU-D-PRIME rate is only available to customers with heat pumps for either space or water heating, a battery storage system, or an electric vehicle and therefore was only evaluated for the all-electric cases and the Efficiency & PV/Battery packages. The rate which resulted in the lowest annual cost to the customer was used for this analysis, which was TOU-D-4-9 in all cases with the exception of the single family all-electric cases in Climate Zone 14.

Table 5. Climate Zones 10 and 14 are evaluated with both SCE/SoCalGas and SDG&E tariffs since each utility has customers within these climate zones. Climate Zone 5 is evaluated under both PG&E and SoCalGas natural gas rates.

Two SCE tariff options were evaluated: TOU-D-4-9 and TOU-D-PRIME. The TOU-D-PRIME rate is only available to customers with heat pumps for either space or water heating, a battery storage system, or an electric vehicle and therefore was only evaluated for the all-electric cases and the Efficiency & PV/Battery packages. The rate which resulted in the lowest annual cost to the customer was used for this analysis, which was TOU-D-4-9 in all cases with the exception of the single family all-electric cases in Climate Zone 14.

Table 5: IOU Utility Tariffs Applied Based on Climate Zone

Climate Zones	Electric / Gas Utility	Electricity (Time-of-use)	Natural Gas
1-5, 11-13, 16	PG&E	E-TOU, Option B	G1
5	PG&E / SoCalGas	E-TOU, Option B	GR
6, 8-10, 14, 15	SCE / SoCal Gás	TOU-D-4-9 or TOU-D-PRIME	GR
7, 10, 14	SDG&E	TOU-DR1	GR

Source: Utility websites, See Appendix B — Utility Tariff Details for details on the tariffs applied.

Otility rates are assumed to escalate over time, using assumptions from research conducted by Energy and Environmental Economics (E3) in the 2019 study Residential Building Electrification in California study (Energy & Environmental Economics, 2019). Escalation of natural gas rates between 2019 and 2022 is based on the currently filed General Rate Cases (GRCs) for PG&E, SoCalGas and SDG&E. From 2023 through 2025, gas rates are assumed to escalate at 4% per year above inflation, which reflects historical rate increases between 2013 and 2018. Escalation of electricity rates from 2019 through 2025 is assumed to be 2% per year above inflation, based on electric utility estimates. After 2025, escalation rates for both natural gas and electric rates are assumed to drop to a more conservative 1% escalation per year above inflation for long-term rate trajectories beginning in 2026 through 2050. See Appendix B — Utility Tariff Details for additional details.

¹⁴ Net surplus compensation rates based on 1-year average February 2018 – January 2019.



2.5.2 TDV Lifecycle Cost

Cost-effectiveness was also assessed using the Energy Commission's TDV LCC methodology. TDV is a normalized monetary format developed and used by the Energy Commission for comparing electricity and natural gas savings, and it considers the cost of electricity and natural gas consumed during different times of the day and year. The 2019 TDV values are based on long term discounted costs of 30 years for all residential measures. The CBECC-Res simulation software outputs are in terms of TDV kBTUs. The present value of the energy cost savings in dollars is calculated by multiplying the TDV kBTU savings by a net present value (NPV) factor, also developed by the Energy Commission. The NPV factor is \$0.173/TDV kBtu for residential buildings.

Like the customer B/C ratio, a TDV B/C ratio value of one indicates the savings over the life of the measure are equivalent to the incremental cost of that measure. A value greater than one represents a positive return on investment. The ratio is calculated according to Equation 5.

Equation 5

 $TDV \ Benefit - to - Cost \ Ratio = \frac{TDV \ energy \ savings * NPV \ factor}{NPV \ of \ lifetime \ incremental \ cost}$

2.6 Electrification Evaluation

In addition to evaluating upgrades to mixed fuel and all-electric buildings independently that do not result in fuel switching, the Reach Code Team also analyzed the impact on construction costs, utility costs, and TDV when a builder specifies and installs electric appliances instead of the gas appliances typically found in a mixed fuel building. This analysis compared the code compliant mixed fuel prototype, which uses gas for space heating, water heating, cooking, and clothes drying, with the code compliant all-electric prototype. It also compared the all-electric Efficiency & PV Package with the code compliance mixed fuel prototype. In these cases, the relative costs between natural gas and electric appliances, differences between in-house electricity and gas infrastructure and the associated infrastructure costs for providing gas to the building were also included.

A variety of sources were reviewed when determining incremental costs. The sources are listed below.

- SMUD All-Electric Homes Electrification Case Study (EPRI, 2016)
- City of Palo Alto 2019 Title 24 Energy Reach Code Cost-effectiveness Analysis (TRC, 2018)
- Building Electrification Market Assessment (E3, 2019)
- Decarbonization of Heating Energy Use in California Buildings (Hopkins et al., 2018)
- Analysis of the Role of Gas for a Low-Carbon California Future (Navigant, 2008)
- Rulemaking No. 15-03-010 An Order Instituting Rulemaking to Identify Disadvantaged Communities in the San Joaquin Valley and Analyze Economically Feasible Options to Increase Access to Affordable Energy in Those Disadvantages Communities (California Public Utilities Commission, 2016)
- 2010-2012 WO017 Ex Ante Measure Cost Study: Final Report (Itron, 2014)
- Natural gas infrastructure costs provided by utility staff through the Reach Code subprogram.
- Costs obtained from builders, contractors and developers

Incremental costs are presented in Table 6. Values in parentheses represent a lower cost or cost reduction in the electric option relative to mixed fuel. The costs from the available sources varied widely, making it difficult to develop narrow cost estimates for each component. For certain components data is provided with a low to high range as well as what were determined to be typical costs and ultimately applied in this analysis. Two sets of typical costs are presented, one which is applied in the On-Bill cost effectiveness methodology and another applied in the TDV methodology. Details of these differences are explained in the discussion of site gas infrastructure costs in the following pages.



Table 6: Incremental Costs – All-Electric Code Compliant Home Compared to a Mixed Fuel
Code Compliant Home

		ruc com	parametric an	LUXILL						
Measure	<u>Inc</u>	emental C	ost (2020 l	Incremental Cost (2020 PV\$)						
weasure		Single I	amily ¹		Multifamily¹ (Per Dwelling Unit)					
	Low	High	Typical (On-Bill)	Typical (TDV)	Low	High	Typical (On-Bill)	Typical (TDV)		
Heat Pump vs Gas Furnace/Split AC	(\$2,770)	\$620	(\$221)							
Heat Pump Water Heater vs Gas Tankless	(\$1,120)	\$1,120	\$0							
Electric vs Gas Clothes Dryer ²	(\$428)	\$820	\$0		, , , Sa	me as Sii	ngle Famil	<i>y</i> .		
Electric vs Gas Cooking ²	\$0	\$1,800		\$0			e e			
Electric Service Upgrade	\$200	\$800	\$	600	\$150	\$600	\$6	00		
In-House Gas Infrastructure	(\$1,670)	(\$550)	(\$	800)	(\$600)	(\$150)	(\$6	00)		
Site Gas Infrastructure	(\$25,000)	(\$900)	(\$5,750)	(\$11,836)	(\$16,250)	(\$310)	(\$3,140)	(\$6,463)		
Total First Cost	(\$30,788)	\$3,710	(\$6,171)	(\$12,257)	(\$20,918)	\$4,500	(\$3,361)	(\$6,684)		
Present Value of Equipment Replace	\$1,266				\$1,	266				
Lifetime Cost Including Replacemen Cost	(\$5,349)	(\$11,872)			(\$2,337)	(\$5,899)				

¹Low and high costs represent the potential range of costs and typical represents the costs used in this analysis and determined to be most representative of the conditions described in this report. Two sets of typical costs are presented, one which is applied in the On-Bill cost effectiveness methodology and another applied in the TDV methodology. ²Typical costs assume electric resistance technology. The high range represents higher end induction cooktops and heat pump clothes dryers. Lower cost induction cooktops are available.

Typical incremental costs for switching from a mixed fuel design to an all-electric design are based on the following assumptions:

Appliances: The Reach Code Team determined that the typical first installed cost for electric appliances is very similar to that for natural gas appliances. This was based on information provided by HVAC contractors, plumbers and builders as well as a review of other studies. After review of various sources, the Reach Code Team concluded that the cost difference between gas and electric resistance options for clothes dryers and stoves is negligible and that the lifetimes of the two technologies are also similar.

HVAC: Typical HVAC incremental costs were based on the City of Palo Alto 2019 Title 24 Energy Reach Code Cost-effectiveness Analysis (TRC, 2018) which assumes approximately \$200 first cost savings for the heat pump relative to the gas furnace and air conditioner. Table 6 also includes the present value of the incremental replacement costs for the heat pump based on a 15-year lifetime and a 20-year lifetime for the gas furnace in the mixed fuel home.

DHW: Typical costs for the water heating system were based on equivalent installed first costs for the HPWH and tankless gas water heater. This accounts for slightly higher equipment cost but lower installation labor due to the elimination of the gas flue. Incremental replacement costs for the HPWH are based on a 15-year lifetime and a 20-year lifetime for the tankless water heater.

For multifamily, less data was available and therefore a range of low and high costs is not provided. The typical first cost for multifamily similarly is expected to be close to the same for the mixed fuel and allelectric designs. However, there are additional considerations with multifamily such as greater complexity for venting of natural gas appliances as well as for locating the HPWH within the conditioned space (all climates except Climate Zones 1, 3, and 5, see Table 2) that may impact the total costs.

Electric service upgrade: The study assumes an incremental cost to run 220V service to each appliance of \$200 per appliance for single family homes and \$150 per appliance per multifamily apartment based on cost estimates from builders and contractors. The Reach Code Team reviewed production builder utility plans for



mixed-fuel homes and consulted with contractors to estimate which electricity and/or natural gas services are usually provided to the dryer and oven. Typical practice varied, with some builders providing both gas and electric service to both appliances, others providing both services to only one of the appliances, and some only providing gas. For this study, the Reach Code Team determined that for single family homes the typical cost is best qualified by the practice of providing 220V service and gas to either the dryer and the oven and only gas service to the other. For multifamily buildings it's assumed that only gas is provided to the dryer and oven in the mixed fuel home.

It is assumed that no upgrades to the electrical panel are required and that a 200 Amp panel is typically installed for both mixed fuel and all-electric new construction homes. There are no incremental electrical site infrastructure requirements.

In-house gas infrastructure (from meter to appliances): Installation cost to run a gas line from the meter to the appliance location is \$200 per appliance for single family and \$150 per appliance per multifamily apartment based on cost estimates from builders and contractors. The cost estimate includes providing gas to the water heater, furnace, dryer and cooktop.

Site gas infrastructure: The cost-effective analysis components with the highest degree of variability are the costs for on-site gas infrastructure. These costs can be project dependent and may be significantly impacted by such factors as utility territory, site characteristics, distance to the nearest gas main and main location, joint trenching, whether work is conducted by the utility or a private contractor, and number of dwelling units per development. All gas utilities participating in this study were solicited for cost information. The typical infrastructure costs for single family homes presented in Table 6 are based on cost data provided by PG&E and reflect those for a new subdivision in an undeveloped area requiring the installation of natural gas infrastructure, including a main line. Infrastructure costs for infill development can also be highly variable and may be higher than in an undeveloped area. The additional costs associated with disruption of existing roads, sidewalks, and other structures can be significant. Total typical costs in Table 6 assume \$10,000 for extension of a gas main, \$1,686 for a service lateral, and \$150 for the meter.

Utility Gas Main Extensions rules 15 specify that the developer has the option to only pay 50% of the total cost for a main extension after subtraction of allowances for installation of gas appliances. This 50% refund and the appliance allowance deductions are accounted for in the site gas infrastructure costs under the On-Bill cost-effectiveness methodology. The net costs to the utility after partial reimbursement from the developer are included in utility ratebase and recovered via rates to all customers. The total cost of \$5,750 presented in Table 6 reflects a 50% refund on the \$10,000 extension and appliance deductions of \$1,086 for a furnace, water heater, cooktop, and dryer. Under the On-Bill methodology this analysis assumes this developer option will remain available through 2022 and that the cost savings are passed along to the customer.

The 50% refund and appliance deductions were not applied to the site gas infrastructure costs under the TDV cost-effectiveness methodology based on input received from the Energy Commission and agreement from the Reach Code technical advisory team that the approach is appropriate. TDV cost savings impacts extend beyond the customer and account for societal impacts of energy use. Accounting for the full cost of the infrastructure upgrades was determined to be justified when evaluating under the TDV methodology.

¹⁵ PG&E Rule 15: https://www.pge.com/tariffs/tm2/pdf/GAS_RULES_15.pdf
SoCalGas Rule 20: https://www.socalgas.com/regulatory/tariffs/tm2/pdf/20.pdf
SDG&E Rule 15: http://regarchive.sdge.com/tm2/pdf/GAS_GAS-RULES_GRULE15.pdf



Less information was available for the costs associated with gas infrastructure for low-rise multifamily development. The typical cost in Table 6 for the On-Bill methodology is based on TRC's City of Palo Alto 2019. Title 24 Energy Reach Code Cost-effectiveness Analysis (TRC, 2018). These costs, provided by the City of Palo Alto, are approximately \$25,100 for an 8-unit new construction building and reflect connection to an existing main for infill development. Specific costs include plan review, connection charges, meter and manifold, plumbing distribution, and street cut fees. While these costs are specifically based on infill development and from one municipal utility, the estimates are less than those provided by PG&E reflecting the average cost differences charged to the developer between single family and multifamily in an undeveloped area (after accounting for deductions per the Gas Main Extensions rule). To convert costs charged to the developer to account for the full infrastructure upgrade cost (costs applied in the TDV methodology analysis), a factor of 2.06¹⁶ was calculated based on the single family analysis. This same factor was applied to the multifamily cost of \$3,140 to arrive at \$6,463 (see Table 6).

2.7 Greenhouse Gas Emissions

Equivalent CO₂ emission savings were calculated based on outputs from the CBECC-Res simulation software. Electricity emissions vary by region and by hour of the year. CBECC-Res applies two distinct hourly profiles, one for Climate Zones 1 through 5 and 11 through 13 and another for Climate Zones 6 through 10 and 14 through 16. For natural gas a fixed factor of 0.005307 metric tons/therm is used. To compare the mixed fuel and all-electric cases side-by-side, greenhouse gas (GHG) emissions are presented as CO₂-equivalent emissions per square foot of conditioned floor area.

3 Results

The primary objective of the evaluation is to identify cost-effective, non-preempted performance targets for both single family and low-rise multifamily prototypes, under both mixed fuel and all-electric cases, to support the design of local ordinances requiring new low-rise residential buildings to exceed the minimum state requirements. The packages presented are representative examples of designs and measures that can be used to meet the requirements. In practice, a builder can use any combination of non-preempted or preempted compliant measures to meet the requirements.

This analysis covered all sixteen climate zones and evaluated two efficiency packages, including a non-preempted package and a preempted package that includes upgrades to federally regulated equipment, an Efficiency & PV Package for the all-electric scenario only, and an Efficiency & PV/Battery Package. For the efficiency-only packages, measures were refined to ensure that the non-preempted package was cost-effective based on one of the two metrics applied in this study, TDV or On-Bill. The preempted equipment package, which the Reach Code Team considers to be a package of upgrades most reflective of what builders commonly apply to exceed code requirements, was designed to be cost-effective based on the On-Bill cost-effectiveness approach.

Results are presented as EDR Margin instead of compliance margin. EDR is the metric used to determine code compliance in the 2019 cycle. Target EDR Margin is based on taking the calculated EDR Margin for the case and rounding down to the next half of a whole number. Target EDR Margin for the Efficiency Package are defined based on the lower of the EDR Margin of the non-preempted package and the equipment, preempted package. For example, if for a particular case the cost-effective non-preempted package has an EDR Margin of 3 and the preempted package an EDR Margin of 4, the Target EDR Margin is set at 3:

¹⁶ This factor includes the elimination of the 50% refund for the main extension and adding back in the appliance allowance deductions.



For a package to qualify, a minimum EDR Margin of 0.5 was required. This is to say that a package that only achieved an EDR Margin of 0.4, for example, was not considered. An EDR Margin less than 0.5 generally corresponds to a compliance margin lower than 5% and was considered too small to ensure repeatable results. In certain cases, the Reach Code Team did not identify a cost-effective package that achieved the minimum EDR Margin of 0.5.

Although some of the efficiency measures evaluated were not cost-effective and were eliminated, the following measures are included in at least one package:

- Reduced infiltration
- Improved fenestration
- Improved cool roofs
- High performance attics
- Slab insulation
- Reduced duct leakage
- Verified low leakage ducts in conditioned space
- Low pressure-drop distribution system
- Compact hot water distribution system, basic and expanded
- High efficiency furnace, air conditioner & heat pump (preempted)
- High efficiency tankless water heater & heat pump water heater (preempted)

3.1 PV and Battery System Sizing

The approach to determining the size of the PV and battery systems varied based on each package and the source fuel. Table 7 describes the PV and battery sizing approaches applied to each of the four packages. For the Efficiency Non-preempted and Efficiency — Equipment, Preempted packages a different method was applied to each the two fuel scenarios. In all mixed fuel cases, the PV was sized to offset 100% of the estimated electrical load and any electricity savings from efficiency measures were traded off with a smaller PV system. Not downsizing the PV system after adding efficiency measures runs the risk of producing more electricity than is consumed, reducing cost-effectiveness and violating NEM rules. While the impact of this in most cases is minor, analysis confirmed that cost-effectiveness improved when reducing the system size to offset 100% of the electricity usage as opposed to keeping the PV system the same size as the Standard Design.

In the all-electric Efficiency cases, the PV system size was left to match the Standard Design (Std Design PV), and the inclusion of energy efficiency measures was not traded off with a reduced capacity PV system. Because the PV system is sized to meet the electricity load of a mixed fuel home, it is cost-effective to keep the PV system the same size and offset a greater percentage of the electrical load.

For the **Efficiency & PV** case on the all-electric home, the Reach Code Team evaluated PV system sizing to offset 100%, 90% and 80% of the total calculated electricity use. Of these three, sizing to 90% proved to be the most cost-effective based on customer utility bills. This is a result of the impact of the annual minimum bill which is around \$120 across all the utilities. The "sweet spot" is a PV system that reduces electricity bills just enough to match the annual minimum bill; increasing the PV size beyond this adds first cost but does not result in utility bill savings.



Table 7: PV & Battery Sizing Details by Package Type

AUDIC / LA CEDUCCI	y Dizing Deduced by a deta	abe xype
Package	Mixed Fuel	<u> All-Electric</u>
Efficiency (Envelope & Equipment)	PV Scaled @ 100% electricity	Std Design PV
Efficiency & PV	n/a	PV Scaled @ 90%
	PV Scaled @ 100% electricity	PV Scaled @ 100%
Efficiency & PV/Battery	5kWh / SF home	5kWh / SF home
	2.75kWh/ MF apt	2.75kWh/ MF apt

A sensitivity analysis was conducted to determine the appropriate battery and PV capacity for the Efficiency & PV/Battery Packages using the 1-story 2,100 square foot prototype in Climate Zone 12. Results are shown in Figure 2. The current version of CBECC-Res requires a minimum battery size of 5 kWh to qualify for the self-utilization credit. CBECC-Res allows for PV oversizing up to 160% of the building's estimated electricity load when battery storage systems are installed; however, the Reach Code Team considered this high, potentially problematic from a grid perspective, and likely not acceptable to the utilities or customers. The Reach Code Team compared cost-effectiveness of 5kWh and 7.5kWh battery systems as well as of PV systems sized to offset 90%, 100%, or 120% of the estimated electrical load.

Results show that from an on-bill perspective a smaller battery size is more cost-effective. The sensitivity analysis also showed that increasing the PV capacity from 90% to 120% of the electricity use reduced cost-effectiveness. From the TDV perspective there was little difference in results across all the scenarios, with the larger battery size being marginally more cost-effective. Based on these results, the Reach Code Team applied to the Efficiency & PV/Battery Package a 5kWh battery system for single family homes with PV sized to offset 100% of the electricity load. Even though PV scaled to 90% was the most cost-effective, sizing was increased to 100% to evaluate greater generation beyond the Efficiency & PV Package and to achieve zero net electricity. These results also show that in isolation, the inclusion of a battery system reduces cost-effectiveness compared to the same size PV system without batteries.

For multifamily buildings the battery capacity was scaled to reflect the average ratio of battery size to PV system capacity (kWh/kW) for the single family Efficiency & PV Package. This resulted in a 22kWh battery for the multifamily building, or 2.75kWh per apartment.

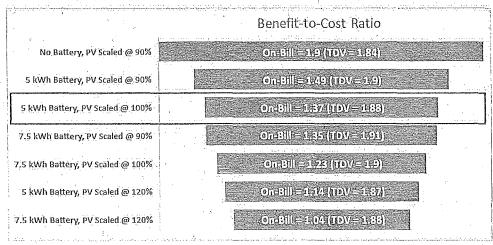


Figure 2: B/C ratio comparison for PV and battery sizing



3.2 Single Family Results

Table 8 through Table 10 contain cost effectiveness findings for the single family packages. Table 8 summarizes the package costs for all of the mixed fuel and all-electric efficiency, PV and battery packages. The mixed fuel results are evaluated and presented relative to a mixed fuel code compliant basecase while the all-electric results are relative to an all-electric code compliant basecase.

Table 9 and Table 10 present the B/C ratios for all the single family packages according to both the On-Bill and TDV methodologies for the mixed fuel and the all-electric cases, respectively. Results are cost-effective based on TDV for all cases except for Climate Zone 7 where no cost-effective combination of non-preempted efficiency measures was found that met the minimum 0.5 EDR Margin threshold. Cases where the B/C ratio is indicated as: ">1" refer to instances where there are incremental cost savings in addition to annual utility bill savings. In these cases, there is no cost associated with the upgrade and benefits are realized immediately.

Figure 3 presents a comparison of Total EDRs for single family buildings and Figure 4 presents the EDR Margin results. Each graph compares the mixed fuel and all-electric cases as well as the various packages. The EDR Margin for the Efficiency Package for most climates is between 1.0 and 5.5 for mixed fuel cases and slightly higher, between 1.5 and 6.5, for the all-electric design. No cost-effective mixed fuel or all-electric non-preempted Efficiency package was found Climate Zone 7.

For the mixed fuel case, the Efficiency & PV/Battery Package increased the EDR Margin to values between 7.0 and 10.5. Because of the limitations on oversizing PV systems to offset natural gas use it is not feasible to achieve higher EDR Margins by increasing PV system capacity.

For the all-electric case, the Efficiency & PV Package resulted in EDR Margins of 11.0 to 19.0 for most climates; adding a battery system increased the EDR Margin by an additional 7 to 13 points. Climate zones 1 and 16, which have high heating loads, have much higher EDR Margins for the Efficiency & PV package (26.5-31.0). The Standard Design PV, which is what is applied in the all-electric Efficiency Package, is not sized to offset any of the heating load. When the PV system is sized to offset 90% of the total electricity use, the increase is substantial as a result. In contrast, in Climate Zone 15 the Standard Design PV system is already sized to cover the cooling electricity load, which represents 40% of whole building electricity use. Therefore, increasing the PV size to offset 90% of the electric load in this climate only results in adding approximately 120 Watts of PV capacity and subsequently a negligible impact on the EDR.

Additional results details can be found in Appendix C—Single Family Detailed Results with summaries of measures included in each of the packages in Appendix D—Single Family Measure Summary. A summary of results by climate zone is presented in Appendix G—Results by Climate Zone.



21 2019-08-01

Table 8: Single Family Package Lifetime Incremental Costs

		Mixed Fuel		All-Electric							
Climate Zone	Non-Preempted	Equipment - Preempted	Efficiency & PV/Battery	Non-Preempted	Equipment - Preempted	Efficiency & PV	Efficiency & PV/Battery				
CZ01	+\$1,355	+\$1,280	+\$5,311	+\$7,642	+\$2,108	+\$18,192	+\$24,770				
CZ02	+\$1,504	+\$724	+\$5,393	+\$3,943	+\$2,108	+\$12,106	+\$18,132				
CZ03	+\$1,552	+\$1,448	+\$5,438	+\$1,519	+\$2,108	+\$8,517	+\$14,380				
CZ04	+\$1,556	+\$758	+\$5,434	+\$1,519	+\$2,108	+\$8,786	+\$14,664				
CZ05	+\$1,571	+\$772	+\$5,433	+\$1,519	+\$2,108	+\$8,307	+\$14,047				
CZ06	+\$1,003	+\$581	+\$4,889	+\$926	+\$846	+\$6,341	+\$12,036				
CZ07	n/a	+\$606	+\$4,028	n/a	+\$846	+\$4,436	+\$9,936				
CZ08	+\$581	+\$586	+\$4,466	+\$926	+\$412	+\$5,373	+\$11,016				
CZ09	+\$912	+\$574	+\$4,785	+\$1,180	+\$846	+\$5,778	+\$11,454				
CZ10	+\$1,648	+\$593	+\$5,522	+\$1,773	+\$949	+\$6,405	+\$12,129				
CZ11	+\$3,143	+\$1,222	+\$7,026	+\$3,735	+\$2,108	+\$10,827	+\$17,077				
CZ12	+ \$1,679	+\$654	+\$5,568	+\$3,735	+\$2,108	+\$11,520	+\$17,586				
CZ13	+\$3,060	+\$611	+\$6,954	+\$4,154	+\$2,108	+\$10,532	+\$16,806				
CZ14	+\$1,662	+\$799	+\$5,526	+\$4,154	+\$2,108	+\$10,459	+\$16,394				
CZ15	+\$2,179	-(\$936)	+\$6,043	+\$4,612	+\$2,108	+\$5,085	+\$11,382				
CZ16	+\$3,542	+\$2,441	+\$7,399	+\$5,731	+\$2,108	+\$16,582	+\$22,838				

Table 9: Single Family Package Cost-Effectiveness Results for the Mixed Fuel Case 1,2

			ripis (1.51 Lead i rediadi		Efficiency & PV/Battery							
		Non-Preempted			Equipme	nt - Preer	npted 🗆	Target	Targe			
		Efficiency	On-Bill	TDV	Efficiency	r - 5 1.0 13/19/	TDV	Efficiency	Total	On-Bill	TDV	Total
		EDR	B/C	в/с	EDR	B/C	B/C	EDR	EDR	B/C	B/C	EDR:
CZ	Utility	Margin -	Ratio	Ratio	Margin	Ratio	Ratio	Margin	Margin	Ratio	Ratio	Margin
01	PG&E	5.3	3.4	2.8	6.9	- 4.9	4.1	5,0	10.6	0.9	1.6	10.5
02	P.G&E	3.3	1.6	1.7	3.3	3.8	3.6	3.0	10.1	0,5	1.6	10.0
03	PG&E	3.0.	1.3	1.3	4.1	1.9	2.0	2.5	10.0	0,4	1.4	10.0
04	PG&E	2.5	0.9	1.2	2.7	2.4	2.7	2.5	10.1	0.3	1.5	10.0
05	PG&E	2.7	1.1	1.2	2.6	2.3	2.5	2.5	9.4	0.4	1.3	9.0%
05	PG&E/SoCalGas	2.7	0.9	1.2	2.6	2.0	2.5	2.5	9,4	0,3	1.3	9.0
06	SCE/SoCalGas	2.0	- 0.7	1.2	2.0	1,6	2.0	1.5	9,8	0.8	1.3	9.5
07	SDG&E	0.0			1.5	1.5	1.4	0.0	9.2	0,1	1.3	9.0
08	SCE/SoCalGas	1.3	0.6	1.4	1.6	1.3	- 1.8	1.0	8.4	A-70.9	1.3	8.0
09	SCE/SoCalGas	2.6	0.7	2.0	2.9	1.8	3.7	2.5	8.8	1.0	1.5	8.5
10	SCE/SoCalGas	3.2	0.6	1.3	3.2	2.0_	3.8	3.0-6	9.6	1.0	1.5	9.5
10	SDG&E	3.2	0.8	1.3	3.2	2.6	3.8	3.0	9.6	0.6	1.5	9.5
11	PG&E	4.3	0.8	1.2	5.1	2.5	3.7	4.0	9.2	0.4	1.5	9.0
12	PG&E	3.5	1.2	1.8	3.4	3.3	4.6	3,0	9,6	0.4	1.7	9.5
13	PG&E	4.6	0.8	1.3	5.8	5.3	8.4	4,5	9,7	0.4	1.6	9.5
14	SCE/SoCalGas	5.0	1.6	2.5	5.8	4.0	6.1	4.5		1,3	-1:7	9.0
14	SDG&E	5.0	1.9	2.5	5.8	4.9	6.1	4.5	9.0	1,2	1.7	9.0
15	SCE/SoCalGas	4.8	1.0	1.6	5.0-	>1	>1	4.5	7.1	1.1	1.5	7.0
16	PG&E	5.4	1.6	1.5	6.2	2.2	2.2	5.0	10.5	0.9	1.4	10.5

^{1"}>1" indicates cases where there are both first cost savings and annual utility bill savings.

²Information about the measures included for each climate zone are described in Appendix D — Single Family Measure Summary.

Table 10: Single Family Package Cost-Effectiveness Results for the All-Electric Case^{1,2}

2.4		Efficiency									Efficiency & PV				Efficiency & PV/Battery			
40000		Non-P	reempte	ed	Equipmen	it - Preei	mpted	Target				Target				Target		
		Efficiency	On-Bill	TDV	Efficiency	On-Bill	TDV	Efficiency	Total	On-Bill	TDV	Total	Total	On-Bill	TDV	Total		
		EDR	B/C	B/C	EDR	B/C	B/C	EDR	EDR	в/с	B/C	EDR	EDR	B/C	B/C	EDR		
CZ	Utility	Margin	Ratio	Ratio	Margin	Ratio	Ratio	Margin	Margin	Ratio	Ratio	Margin	Margin	Ratio	Ratio	Margin		
01	PG&E	15.2	1.8	1.7	6.9	2.9	2.7	6.5	31.4	1.8	1.5	31.0	41.2	1.4	1.4	41.0		
02	PG&E	4.9	1.2	1.1	5.1	2.3	2.1	4.5	19.4	1.8	1.4	19.0	30.1	1.4	1.4	30.0		
03	PG&E	4.7	2.6	2.4	4.4	1.8	1.6	4.0	18.5	2.2	1.7	18.0	29.3	1.5	1.6	29.0		
04	PG&E	3,4	1.9	1.8	3.9	1.5	1.5	- 3,0	17.2	2.1	1.6	17.0	28.6	1.5	1.6	28.5		
05	PG&E	4.4	2.6	2.3	4.4	1.9	1.7	4.0	18.2	2.3	1.8	18.0	28.7	1.6	1,6	28.5		
05	PG&E/SoCalGas	4.4	2.6	2.3	4.4	1.9	1.7	4.0	18.2	2.3	1.8	18.0	28.7	1.6	1.6	28,5		
06	SCE/SoCalGas	2.0	1.3	1.4	2.9	2.2	2.3	2.0	14.3	1.2	1.5	14.0	26.1	1.2	1.4	. 426.0		
07	SDG&E	0.0		-	2.2	1.6	1.7	0:0	11.3	1.9	1.5	11.0	24.2	1.3	1.5	24.0		
08	SCE/SoCalGas	1.6	0.6	1.2	1.8	2.8	3.0	1.5	10.9	1.0	1.5	10.5	21.6	1.1	1.4	21.5		
09	SCE/SoCalGas	2.8	0.8	2.0	3.3	2.1	3.2	2.5	11.5	1.1	1.6	11.5	21.3	1.1	1.5	21.0		
10	SCE/SoCalGas	3.1	0.9	1.5	3.4	2.3	3.2	3.0	11.1	1.1	1.5	11.0	21.2	1.1	1.5	21.0		
10	SDG&E	3.1	1.1	1.5	3.4	2.6	3.2	3.0	11.1	1.7	1.5	11.0	21.2	1.4	1.5	21.0		
11	PG&E	4.6	1.2	1.5	5.9	3.0	3.3	4.5	14.2	1.8	1.6	14.0	23.2	1.5	1.6	23.0		
12	PG&E	3.8	0.8	1.1	5.1	2.0	2.5	3.5	15.7	1.7	1.4	15.5	25.4	1.3	1.5	25.0		
13	PG&E	5.1	1.1	1.4	6.0	2.9	3.3	5.0	13.4	1.7	1.5	13.0	22.5	1.4	1,5	22.0		
14	SCE/SoCalGas	5.6	1.0	1.5	6.0	2,3	3.1	5.5	15.5	1.2	1.6	15.5	23.9	1.4	1.6	23.5		
14	SDG&E	5.6	1.3	1.5	6.0	2.9	3.1	.5.5	15.5	1.8	1.6	15.5	23.9	1.7	1.6	23.5		
15	SCE/SoCalGas	5.6	1.1	1.6	7.3	3.3	4.5	5.5	6.2	1.1	1.6	6.0	13.5	1.2	1.5	13.0		
16	PG&E	9.7	1.7	1.7	4.9	2.4	2.3	4.5	27.0	2.1	1.6	26.5	35.4	1.7	1.5	35.0		

 ^{1&}quot;>1" indicates cases where there are both first cost savings and annual utility bill savings.
 2 information about the measures included for each climate zone are described in Appendix D – Single Family Measure Summary

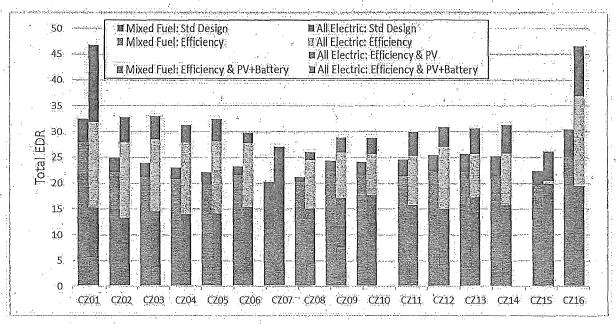


Figure 3: Single family Total EDR comparison

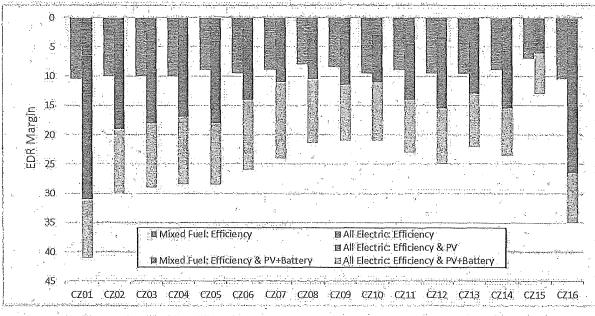


Figure 4: Single family EDR Margin comparison (based on Efficiency EDR Margin for the Efficiency packages and the Total EDR Margin for the Efficiency & PV and Efficiency & PV/Battery packages)

3.2.1 GHG Emission Reductions

Figure 5 compares annual GHG emissions for both mixed fuel and all-electric single family 2019 code compliant cases with Efficiency, Efficiency & PV and Efficiency & PV/Battery packages. GHG emissions vary by climate but are consistently higher in mixed fuel cases than all-electric. Standard Design mixed fuel emissions range from 1.3 (CZ 7) to 3.3 (CZ 16) lbs CO2e/square foot of floor area, where all-electric Standard Design emissions range from 0.7 to 1.7 lbs CO2e/ft². Adding efficiency, PV and batteries to the mixed fuel code compliant prototype reduces GHG emissions by 20% on average to between 1.0 and 1.8 lbs CO2e/ft², with the exception of Climate Zones 1 and 16. Adding efficiency, PV and batteries to the all-electric code compliant prototype reduces annual GHG emissions by 65% on average to 0.8 lbs CO2e/ft² or less. None of the cases completely eliminate GHG emissions. Because of the time value of emissions calculation for electricity in CBECC-Res, there is always some amount of GHG impacts with using electricity from the grid.

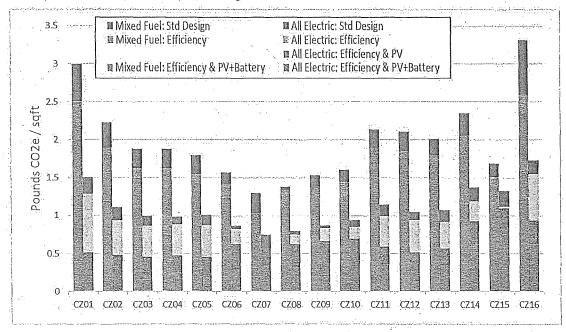


Figure 5: Single family greenhouse gas emissions comparison

3.3 Multifamily Results

Table 11 through Table 13 contain cost effectiveness findings for the multifamily packages. Table 11 summarizes the package costs for all the mixed fuel and all-electric efficiency, PV and battery packages.

Table 12 and Table 13 present the B/C ratios for all the packages according to both the On-Bill and TDV methodologies for the mixed fuel and the all-electric cases, respectively. All the packages are cost-effective based on TDV except Climate Zone 3 for the all-electric cases where no cost-effective combination of non-preempted efficiency measures was found that met the minimum 0.5 EDR Margin threshold. Cases where the B/C ratio is indicated as */>1" refer to instances where there are incremental cost savings in addition to annual utility bill savings. In these cases, there is no cost associated with this upgrade and benefits are realized immediately.

It is generally more challenging to achieve equivalent savings targets cost-effectively for the multifamily cases than for the single family cases. With less exterior surface area per floor area the impact of envelope measures

is diminished in multifamily buildings. Ducts are already assumed to be within conditioned space and therefore only one of the duct measures found to be cost-effective in single family homes can be applied.

Figure 6 presents a comparison of Total EDRs for the multifamily cases and Figure 7 presents the EDR Margin results. Each graph compares the mixed fuel and all-electric cases as well as the various packages. Cost-effective efficiency packages were found for all mixed fuel cases. The Target EDR Margins for the mixed fuel Efficiency Package are 0.5 for Climate Zones 3, 5 and 7, between 1.0 and 2,5 for Climate Zones 1, 2, 4, 6, 8 through 12 and 16, and between 3.0 and 4.0 in Climate Zones 13 through 15. For the all-electric case, no cost-effective non-preempted efficiency packages were found in Climate Zone 3. The Target EDR Margins are between 0.5 and 2.5 for Climate Zones 2, 4 through 10 and 12, and between 3.0 and 4.0 in Climate Zones 1, 11, and 13 through 16.

For the mixed fuel case, the Efficiency & PV/Battery Package results in an EDR Margin of between 8.5 and 11.5 across all climate zones. Most of these packages were not found to be cost-effective based on utility bill savings alone, but they all are cost-effective based on TDV energy savings. For the all-electric case, the Efficiency & PV Package resulted in EDR Margins of 10.5 to 17.5 for most climates; adding a battery system increased the EDR Margin by an additional 10 to 15 points. Climate zones 1 and 16, which have high heating loads, have much higher EDR Margins for the Efficiency & PV package (19.5-22.5). The Standard Design PV, which is what is applied in the Efficiency Package, is not sized to offset any of the heating load. When the PV system is sized to offset 90% of the total electricity use, the increase is substantial as a result. In Climate Zone 15 the Standard Design PV system is already sized to cover the cooling electricity load, which represents 30% of whole building electricity use. Therefore, increasing the PV size to offset 90% of the electric load in this climate only results in adding approximately 240 Watts of PV capacity per apartment and subsequently a much smaller impact on the EDR than in other climate zones. Because of the limitations on oversizing PV systems to offset natural gas use it is not feasible to achieve comparable EDR Margins for the mixed fuel case as in the all-electric case.

Additional results details can be found in Appendix E – Multifamily Detailed Results with summaries of measures included in each of the packages in Appendix F – Multifamily Measure Summary. A summary of results by climate zone is presented in Appendix G – Results by Climate Zone.



Table 11: Multifamily Package Incremental Costs per Dwelling Unit

		Mixed Fuel	9		All-Ele		
Climate Zone	Non- Preempted	Equipment - Preempted	Efficiency & PV/Battery	Non- Preempted	Equipment - Preempted	Efficiency & PV	Efficiency & PV/Battery
CZ01	+\$960	+\$507	+\$3,094	+\$949	+\$795	+\$5,538	+\$8,919
CZ02	+\$309	+\$497	+\$2,413	+\$361	+\$795	+\$3,711	+\$6,833
CZ03	+\$175	+\$403	+\$2,279	n/a	+\$795	+\$3,272	+\$6,344
CZ04	+\$829	+\$351	+\$2,429	+\$361	+\$795	+\$3,158	+\$6,201
CZ05	+\$180	+\$358	+\$2,273	+\$247	+\$795	+\$3,293	+\$6,314
CZ06	+\$190	+\$213	+\$2,294	+\$231	+\$361	+\$2,580	+\$5,590
.CZ07	+\$90	+\$366	+\$2,188	+\$202	+\$361	+\$2,261	+\$5,203
CZ08	+\$250	+\$213	+\$2,353	+\$231	+\$361	+\$2,240	+\$5,249
CZ09	+\$136	+\$274	+\$2,234	+\$231	+\$361	+\$2,232	+\$5,236
CZ10	+\$278	+\$250	+\$2,376	+\$361	+\$361	+\$2,371	+\$5,395
CZ11	+\$850	+\$317	+\$2,950	+\$1,011	+\$795	+\$3,601	+\$6,759
CZ12	+\$291	+\$434	+\$2,394	+\$1,011	+\$795	+\$3,835	+\$6,943
CZ13	+\$831	+\$290	+\$2,936	+\$1,011	+\$795	+\$3,462	+\$6,650
CZ14	+\$874	+\$347	+\$2,957	+\$1,011	+\$795	+\$3,356	+\$6,380
CZ15	+\$510	-(\$157)	+\$2,604	+\$1,011	+\$1,954	+\$1,826	+\$5,020
CZ16:	+\$937	+\$453	+\$3,028	+\$843	+\$795	+\$4,423	+\$7,533

Table 12: Multifamily Package Cost-Effectiveness Results for the Mixed Fuel Case^{1,2}

		ne 12: Muit			Efficiency				Later the second second	ciency &		tery
		Non-P	reempted		Eguipme	ent - Preei	npted	Target				Target
		Efficiency	On-Bill	TDV	Efficiency	On-Bill	TDV	Efficiency	Total	On-Bill	TDV	Total
		EDR	B/C	B/C	EDR	B/C	B/C	EDR	EDR	B/C	B/C	EDR
CZ	Utility	Margin	Ratio	Ratio	Margin	Ratio	Ratio	Margin	Margin	Ratio	Ratio	Margin
01	PG&E	3.4	1.1	1.2	2.3	1.3	1.4	2,0	11.5	0.4	1.2	11.5
02	PG&E	1.8	1.0	1.7	2.3	1.1	1.5	1.5	10.9	0.2	1.6	10.5
03	P.G&E	0.6	1.0	1.1	1.6	1.1	1.2	0.5	10.3	0.1	1.4	10.0
04	PG&E	1.3	0,8	1.2	1.9	1,1	1.7	1.0	11.2	0.2	1.6	11.0
05	PG&E	0.5	1.0	1.0	1.5	1.2	1.3	0.5	9.9	0,2	1.4	9.5
05	PG&E/SoCalGas	0.5	0.8	1.0	1.5	1.1	1.3	0.5	9.9	0.1	1.4	9.5
06	SCE/SoCalGas	1.3	0.6	1.5	1,3	1.4	1.7	1.0	10.7	0.6	1.4	10.5
07	SDG&E	0.9	0.7	2.2	- 2.0	1.1	1.4	0.5	11.0	0.0	1.4	, 11:0
08	SCE/SoCalGas	1.5	0.7	1,4	1.1	1.4	1.7	1.0	9.9	0.7	1.3	9.5
09	SCE/SoCalGas	1.8	1,5	3.3	2.8	1.7	2.9	1.5	9.7	0.9	1.5	9.5
10	SCE/SoCalGas	1.7	0.8	±1.7	2:9	2.0	3.3	1.5	10.4	1.0	1.6	^{///} 10.0′
10	SDG&E	1.7	1.1	1.7	2.9	2.6	3.3	1.5	10.4	0.2	1.6	10.0
11	PG&E	2.9	0.7	1.2	3.2	1.8	3.3	2.5	10.5	0.4	1.6	10.5
12	PG&E	1.9	1.13	2.2	2.8	1.2	2.2	1,5	10.3	0.3	1.7	10.0
13	PG&E	3.1	0.6	1.3	3,4	2.0	3.8	3.0%	10.7	0.4	1.6	10.5
14	SCE/SoCalGas	3.1	0.7	1.2	3.3	2.0	3.0	3.0	9.6	1.1	1.4	9.5
14	SDG&E	3.1	0.9	1,2	3.3	2.5	3.0	3,0	9,6	0.5	1.4	9.5
15	SCE/SoCalGas	4.2	1.4	2:3	4.4	>1	>1	4.0	8.8	1.3	1.7	8.5
16	PG&E	2.4	1.1	1.2	2.9	1.8	2.1	2.0	9.9	0.5	1.3	9.5

^{1&}quot;>1" indicates cases where there are both first cost savings and annual utility bill savings.

Information about the measures included for each climate zone are described in Appendix F — Multifamily Measure Summary.

Table 13: Multifamily Package Cost-effectiveness Results for the All-Electric Case^{1,2}

					Efficien	су				Efficienc	су & Р	V	Efficiency & PV/Battery			
		Non-l	Preemp	ted	Equipm	ient - Preen	npted	Target				Target				Target
		Efficiency	On-Bill	TDV	Efficiency		TDV	Efficiency	Total	On-Bill	TDV	Total	Total	On-Bill	TDV	Total
		EDR	B/C	B/C	EDR	On-Bill	в/с	EDR	EDR	в/с	B/C	EDR	EDR	B/C	в/с	EDR
CZ	Utility	Margin	Ratio	Ratio	Margin	B/C Ratio	Ratio	Margin	Margin	Ratio	Ratio	Margin	Margin	Ratio	Ratio	Margin
01	PG&E	3.6	1.6	1.4	3.3	2.4	2.3	3.0	22.5	2.0	1.5	22.5	34.5	1.3	1.4	34.5
02	PG&E	1.9	1.7	2.1	3.2	1.6	1.6	1,5	17.5	2.4	1.8	17.5	30.9	1.4	1.7	30.5
03	PG&E	0:0			2.7	1.7	1.6	0,0	16.1	2.4	1.7	16.0	29.5	1.3	1.6	29.5
04	PG&E	1.4	1.4	1.5	2.2	1.2	1.1	1.0	15.0	2.4	1.8	15.0	28.9	1.3	1.8	28.5
05	PG&E	0.6	1.1	0.9	3.6	2.1	2.0	0.5	17.1	2.5	1.8	17.0	30.3	1.4	1.7	30.0
05	PG&E/SoCalGas	0.6	1.1	0.9	3.6	2.1	2.0	0.5	17.1	2.5	1.8	17.0	30.3	1.4	1.7	30.0
06	SCE/SoCalGas	1.0	0.7	1.3	2.2	1.6	1.9	1.0	13.8	1.2	1.7	13.5	27.5	1.2	1.6	27.5
07	SDG&E	0.6	0.6	1.0	1.9	1.6	1.7	0.5	12.8	2.1	1.8	12.5	27.1	1.2	1.6	27.0
.08	SCE/SoCalGas	1.2	0.9	1.7	1.9	1.6	1.8	1:0	11.6	1.3	1.8	11.5	24.2	1.2	1.6	24.0
09	SCE/SoCalGas	1.6	1.3	2.7	1.5	1.6	1.6	1.5	11.3	1.3	1.9	11.0	23.3	1.3	1.7	23.0
10	SCE/SoCalGas	1.8	1.2	2.0	1.8	1.7	2.0	1.5	10.8	1.3	1.8	10.5	23.3	1.3	1.7	23.0
10	SDG&E	1.8	1.5	2.0	1.8	2.0	2.0	1.5	10.8	2.1	1.8	. 10.5	23.3	1.4	1.7	23.0
11	PG&E	3.5	1.4	1.6	3.9	2.0	2.3	3.5	13.4	2.2	1.8	13.0	25.3	1.4	1.8	25,0
12	PG&E	2.6	0.9	1.1	2.9	1.6	1.6	2.5	14.4	2.1	1.6	14.0	26.6	1.3	1.7	26.5
13	PG&E	3.3	1.3	1.6	3.8	2.0	2.3	3.0	12.2	2.1.	1.7	12.0	23.9	1.4	1.7	23.5
14	SCE/SoCalGas	3.7	1.2	1.6	3.8	1.6	2.2	3,5	14.0	1.4	1.9	14.0	24.8	1.4	1.8	24.5
14	SDG&E	3.7	1.5	1.6	3.8	2.0	2.2	3.5	14.0	2.2	1.9	14.0.	24.8	1.7	1.8	24.5
15	SCE/SoCalGas	4.4	1.5	2.3	6.4	1.2	1.7	4.0	7.1	1.4	2.1	7.0	16.9	1.3	1.8	16.5
16	PG&E	4.1	2.1	2.1	3.2	1.6	1.7	3.0	19.6	2.6	1.9	19.5	29.9	1.6	1.7	29.5



 ^{1&}quot;>1" indicates cases where there are both first cost savings and annual utility bill savings.
 2Information about the measures included for each climate zone are described in Appendix F – Multifamily Measure Summary.

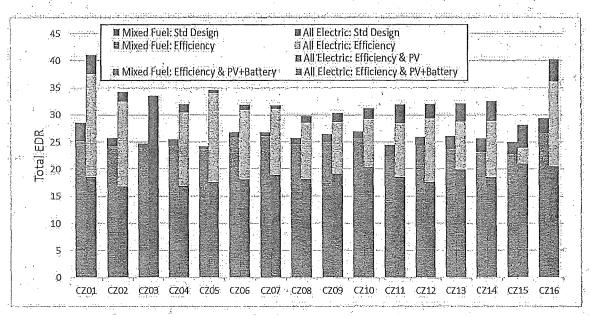


Figure 6: Multifamily Total EDR comparison

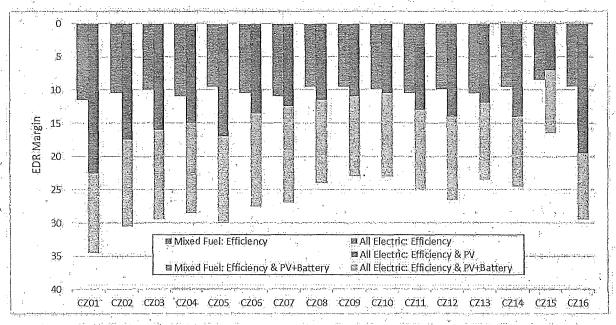


Figure 7: Multifamily EDR Margin comparison (based on Efficiency EDR Margin for the Efficiency packages and the Total EDR Margin for the Efficiency & PV and Efficiency & PV/Battery packages)

0

31

3.3.1 GHG Emission Reductions

Figure 8 compares annual GHG emissions for both mixed fuel and all-electric multifamily 2019 code compliant cases with Efficiency, Efficiency & PV and Efficiency & PV/Battery packages. GHG emissions vary by climate but are consistently higher in mixed fuel cases than all-electric. Standard design mixed fuel emissions range from 2.0 to 3.0 lbs CO2e/square foot of floor area, where all-electric standard design emissions range from 1.2 to 1.7 lbs CO2e/ft². Adding PV, batteries and efficiency to the mixed fuel code compliant prototype reduces annual GHG emissions by 17% on average to between 1.7 and 2.2 lbs CO2e/ft², except Climate Zone 16. Adding PV, batteries and efficiency to the all-electric code compliant prototype reduces annual GHG emissions by 64% on average to 0.6 lbs CO2e/ft² or less with the exception of Climate Zones 14, 15 and 16. As in the single family case, none of the cases completely eliminate GHG emissions because of the time value of emissions calculation for electricity in CBECC-Res.

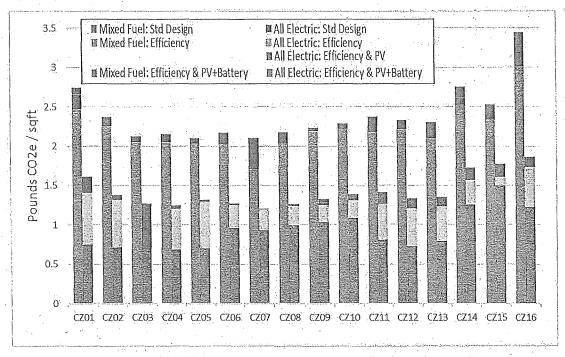


Figure 8: Multifamily greenhouse gas emissions comparison

3.4 Electrification Results

Cost-effectiveness results comparing mixed fuel and all-electric cases are summarized below. The tables show average annual utility bill impacts and lifetime utility bill impacts, which account for fuel escalation for electricity and natural gas (see Section 2.5), lifetime equipment cost savings, and both On-Bill and TDV cost-effectiveness (B/C ratio). Positive utility bill values indicate lower utility costs for the all-electric home relative to the mixed fuel case while negative values in red and parenthesis indicate higher utility costs for the all-electric case. Lifetime equipment cost savings include savings due to eliminating natural gas infrastructure and replacement costs for appliances based on equipment life. Positive values for the lifetime equipment cost savings indicate lower installed costs for the all-electric and negative values indicate higher costs. B/C ratios 1.0 or greater indicate positive cost-effectiveness. Cases where the B/C ratio is indicated as ">1" refer to instances where there was incremental cost savings in addition to annual utility bill savings. In these cases, there is no cost associated with this upgrade and benefits are realized immediately.

0

Three scenarios were evaluated:

- 2019 Code Compliant: Compares a 2019 code compliant all-electric home with a 2019 code compliant mixed fuel home.
- Efficiency & PV Package: Compares an all-electric home with efficiency and PV sized to 90% of the
 annual electricity use to a 2019 code compliant mixed fuel home. The first cost savings in the code
 compliant all-electric house is invested in above code efficiency and PV reflective of the Efficiency & PV
 packages described above.
- 3. Neutral Cost Package: Compares an all-electric home with PV beyond code minimum with a 2019 code compliant mixed fuel home. The PV system for the all-electric case is sized to result in a zero lifetime incremental cost relative to a mixed fuel home.

3.4.1 Single Family

Table 14, Table 15, Figure 9, Figure 10, and Figure 11 present results of cost-effectiveness analysis for electrification of single family buildings, according to both the On-Bill and TDV methodologies. Based on typical cost assumptions arrived at for this analysis, the lifetime equipment costs for the single family code compliant all-electric option are approximately \$5,350 less than the mixed fuel code compliant option. Cost savings are entirely due to the elimination of gas infrastructure, which was assumed to be a savings of \$5,750. When evaluating cost-effectiveness based on TDV, the Utility Gas Main Extensions rules 50% refund and appliance allowance deduction are not applied and therefore the cost savings are twice as much.

Under the Efficiency & PV Package and the On-Bill analysis, the incremental cost of the efficiency and PV is typically more than the cost savings seen in the code compliant case, which results in a net cost increase in most climate zones for the all-electric case. In climates with small heating loads (7 and 15) there continues to be an incremental cost savings for the all-electric home. With the TDV analysis, there is still an incremental cost savings in all climates except 1 and 16 for single family.

Utility impacts differ by climate zone and utility, but utility costs for the code compliant all-electric option are typically higher than for the compliant mixed fuel design. There are utility cost savings across all climates zones and building types for the all-electric Efficiency & PV Package, resulting in a more cost-effective option.

The all-electric code compliant option is cost-effective based on the On-Bill approach for single family homes in Climate Zones 6 through 9, 10 (SCE/SoCalGas territory only); and 15. The code compliant option is cost-effective based on the TDV methodology in all climate zones except 1 and 16. If the same costs used for the On-Bill approach are also used for the TDV approach (incorporating the Utility Gas Main Extensions rules 50% refund and appliance allowance deduction), the all-electric code compliant option is cost-effective in Climate Zones 6 through 10. The Efficiency & PV all-electric option is cost-effective in all climate zones based on both the On-Bill and TDV methodologies. In many cases it is cost-effective immediately with lower equipment and utility costs.

The last set of results in Table 14 shows the neutral cost case where the cost savings for the all-electric code compliant home is invested in a larger PV system, resulting in a lifetime incremental cost of zero based on the On-Bill approach. This package results in utility cost savings in all cases except Climate Zones 1, 14 (SCE/SoCalGas territory only), and 16. For these three cases the Reach Code Team evaluated how much additional PV would be required to result in a cost-effective package. These results are presented in Table 15 and show that an additional 1.6kW in Climate Zone 1 results in a B/C ratio of 1.1. For Climate Zone 14 and 16 adding 0.25kW and 1.2kW, respectively, results in a B/C ratio of 1.2. Neutral cost cases are cost-effective based on the TDV methodology in all climate zones except 16.

3.4.2 Multifamily

Multifamily results are found in Table 16, Table 17, Figure 12, Figure 13, and Figure 14. Lifetime costs for the multifamily code compliant all-electric option are approximately \$2,300 less than the mixed fuel code compliant option, entirely due to the elimination of gas infrastructure. When evaluating cost-effectiveness based on TDV,



33

the Utility Gas Main Extensions rules 50% refund and appliance allowance deduction are not applied and therefore the cost savings are approximately 2.5 times higher.

With the Efficiency & PV Package and the On-Bill analysis, due to the added cost of the efficiency and PV there is a net cost increase for the all-electric case in all climate zones for except 7, 8, 9, and 15. With the TDV analysis, there is still an incremental cost savings in all climates. Like the single family results, utility costs are typically higher for the code compliant all-electric option but lower than the code compliant mixed fuel option with the Efficiency & PV Package.

The all-electric code compliant option is cost-effective based on the On-Bill approach for multifamily in Climate Zones 6 through 9, 10 and 14 (SCE/SoCalGas territory only), and 15. Based on the TDV methodology, the code compliant option for multifamily is cost-effective for all climate zones. If the same costs used for the On-Bill approach are also used for the TDV approach (incorporating the Utility Gas Main Extensions rules 50% refund and appliance allowance deduction), the all-electric code compliant option is cost-effective in Climate Zones 8 and 9. Like the single family cases, the Efficiency & PV all-electric option is cost-effective in all climate zones based on both the On-Bill and TDV methodologies.

The last set of results in Table 16 show the neutral cost case where the cost savings for the all-electric code compliant home is invested in a larger PV system, resulting in a lifetime incremental cost of zero based on the On-Bill approach. This package results in utility cost savings in all cases except Climate Zone 1. For this case the Reach Code Team evaluated how much additional PV would be required to result in a cost-effective package. These results are presented in Table 17 and show that an additional 0.3kW per apartment results in a B/C ratio of 1.1. Neutral cost cases are cost-effective based on the TDV methodology in all climate zones except 16.

Table 14: Single Family Electrification Results

h.i.				ss ¹	1 -110 1	TDV Cos	t-effectiven	ess		
		Average A				etime NPV		Life	etime NPV	
		100	Savings							
				Net		Equipment	On-Bill		Equipment	TDV
			Natural	Utility	Utility Bill	Cost	в/с	TDV Cost	Cost	В/С
CZ	Utility	Electricity	Gas	Savings	Savings	Savings	Ratio ²	Savings	Savings	Ratio
				2019 C	ode Complia	nt Home				
01	PG&E	-(\$1,194)	+\$712	-(\$482)	-(\$14,464)	+\$5,349	0.4	-(\$13,081)	+\$11,872	0.9
02	PG&E	-(\$825)	+\$486	-(\$340)	-(\$10,194)	+\$5,349	0.5	-(\$7,456)	+\$11,872	1.6
03	PG&E	-(\$717)	+\$391	-(\$326)	-(\$9,779)	+\$5,349	0.5	-(\$7,766)	+\$11,872	1.5
04	PG&E	-(\$710)	+\$387	-(\$322)	-(\$9,671)	+\$5,349	0.6	-(\$7,447)	+\$11,872	1.6
05	PG&E	-(\$738)	+\$367	-(\$371)	-(\$11,128)	+\$5,349	0.5	-(\$8,969)	+\$11,872	1.3
05	PG&E/SoCalGas	-(\$738)	+\$370	-(\$368)	-(\$11,034)	+\$5,349	0.5	-(\$8,969)	+\$11,872	1.3
06	SCE/SoCalGas	-(\$439)	+\$289	-(\$149)	-(\$4,476)	+\$5,349	1.2	-(\$4,826)	+\$11,872	2.5
. 07	SDG&E	-(\$414)	+\$243	-(\$171)	-(\$5,134)	+\$5,349	1.0	-(\$4,678)	+\$11,872	2.5
08	SCE/SoCalGas	-(\$347)	+\$249	-(\$97)	-(\$2,921)	+\$5,349	1.8	-(\$3,971)	+\$11,872	3.0
09	SCE/SoCalGas	-(\$377)	+\$271	-(\$107)	-(\$3,199)	+\$5,349	1.7	-(\$4,089)	+\$11,872	2.9
10	SCE/SoCalGas	'-(\$403).	+\$280	-(\$123)	-(\$3,684)	+\$5,349	1.5	-(\$4,458)	+\$11,872	2.7
10	SDG&E	-(\$496)	+\$297	-(\$198)	-(\$5,950)	+\$5,349	0.9	-(\$4,458)	+\$11,872	2.7
11	PG&E	-(\$810)	+\$447	-(\$364)	-(\$10,917)	+\$5,349	0.5	-(\$7,024)	+\$11,872	1.7
12	PG&E	-(\$740)	+\$456	-(\$284)	-(\$8,533)	+\$5,349	0.6	-(\$6,281)	+\$11,872	1.9
13	PG&E	-(\$742)	+\$413	-(\$329)	-(\$9,870)	+\$5,349	0,5	-(\$6,480)	+\$11,872	1.8
14	SCE/SoCalGas	-(\$661)	+\$413	-(\$248)	-(\$7,454)	+\$5,349	0.7	-(\$7,126)	+\$11,872	1.7
14	- 1 \$P\$\$P\$ 医多克克氏病 1995年 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	-(\$765)	+\$469	-(\$296)	-(\$8,868)	+\$5,349	0.6	-(\$7,126)	+\$11,872	1.7
15	SCE/SoCalGas	-(\$297)	+\$194	-(\$103)	-(\$3,090)	+\$5,349	1.7	-(\$5,364)	+\$11,872	2.2
16	4. 1. 14. 14. 14. 14. 14. 14. 14. 14. 14	-(\$1,287)	+\$712	-(\$575)	-(\$17,250)	+\$5,349	0.3	-(\$17,391)	+\$11,872	0.7



2019 Energy Efficiency Ordinance Cost-effectiveness Study

			Oř	n-Bill Cost	-effectivene	SS ¹		TDV Cost-effectiveness			
		Average	Annual U			etime NPV			etime NPV		
			Savings								
				Net		Equipment	On Bill		Equipment	TDV	
	지역 아버트로 발표하다 1886 시도 1985년 11일 12일		Natural	Utility	Utility Bill	Cost	B/C	TDV Cost	Cost	B/C	
CZ	Litility	Electricity		Savings	Savings	Savings	Ratio ²	Savings	Savings	Ratio	
		Tree Caroley			ency & PV P				2471184		
01	PG&E	-(\$99)	+\$712	+\$613	+\$18,398		1.4	+\$13,364	-(\$6,321)	2.1	
02	PG&E	-(\$89)	+\$486	+\$397	+\$11,910	-(\$6,758)	1.8	+\$9,307	-(\$234)	39.7	
03	PG&E	-(\$87)	+\$391	+\$304	+\$9,119	-(\$3,169)	2.9	+\$6,516	+\$3,355	>1	
04	PG&E	-(\$85)	+\$387	+\$302	+\$9,074	-(\$3,438)	2.6	+\$6,804	±\$3,086	>1	
05	PG&E	-(\$98)	+\$367	+\$268	+\$8,054	-(\$2,959)	2.7	+\$5,625	+\$3,564	>1	
05	PG&E/SoCalGas	-(\$98)	+\$370	+\$272	+\$8,148	-(\$2,959)	2.8	+\$5,625	+\$3,564	>1	
06	SCE/SoCalGas	-(\$188)	+\$289	+\$102	+\$3,049	-(\$992)	3.1	+\$4,585	+\$5,531	>1	
07	SDG&E	-(\$137)	+\$243	+\$106	+\$3,174	+\$912	>1	+\$2,176	+\$7,436	>1	
08	SCE/SoCalGas	-(\$160)	+\$249	+\$89	+\$2,664	-(\$25)	107.9	+\$3,965	+\$6,499	>1	
09	SCE/SoCalGas	-(\$169)	+\$27.1	+\$102	+\$3,067	-(\$429)	7.1	+\$5,368	+\$6,094	>1	
10	SCE/SoCalGas	-(\$173),	±\$280	+\$107	+\$3,216	-(\$1,057)	3.0	+\$5,165	+\$5,466	>1,	
10	SDG&E	-(\$137)	+\$297	+\$160	+\$4,805	-(\$1,057)	4.5	+\$5,165	+\$5,466	. >1	
11	PG&E	-(\$147)	+\$447	+\$300	+\$8,988	-(\$5,478)	1.6	+\$9,776	+\$1,045	>1	
12	PG&E	-(\$92)	+\$456	+\$364	+\$10,918	(\$6,172) -	1.8	+\$9,913	+\$352	>1	
13	PG&E	-(\$144)	+\$413	+\$269	+\$8,077	-(\$5,184)	1.6	+\$8,960	+\$1,339	>1	
14	SCE/SoCalGas	-(\$241)	+\$413	+\$172	+\$5,164	-(\$5,111)	1.0	+\$9,850	+\$1,412	>1	
14	SDG&E	-(\$139)	+\$469	+\$330	+\$9,910	-(\$5,111)	1,9	+\$9,850	+\$1,412	>1	
15	SCE/SoCalGas	-(\$107)	+\$194	+\$87	+\$2,603	+\$264	>1	+\$2,598	+\$6,787	. >1	
16	PG&E	-(\$130)	+\$712	+\$582	+\$17,457	-(\$11,234)	1.6	+\$9,536	-(\$4,710)	2.0	
100				Net Net	itral Cost Pa	ckage					
01	PG&E	-(\$869)	+\$712	-{\$157 <u>)</u> [-(\$4,704)	+\$0	0	-(\$6,033)	+\$6,549	1.1	
02	PG&E	-(\$445)-	+\$486	+\$40	+\$1,213	ı +\$0	>1,	+\$868	+\$6,505	>1.	
03	PG&E	-(\$335)	+\$391	+\$56	+\$1,671	+\$0	>1	+\$483_	+\$6,520	>1	
04	PG&E	-(\$321)	+\$387	+\$66≒	+\$1,984	+\$0	>1	+\$1,062	+\$6,521	>1	
05	PG&E	-(\$335)	+\$367	+\$31	+\$938	+\$0	>1	-(\$163)	+\$6,519	40.1	
05		-(\$335)	+\$370	+\$34	+\$1,031	+\$0	>1	-(\$163)	+\$6,519	40.1	
06	March 1972 1974	-(\$227)	+\$289	+\$63	+\$1,886	+\$0	>1	+\$3,258	+\$6,499	>1.	
07	SDG&E	(\$72)	+\$243	+\$171	+\$5,132	+\$0	>1	+\$3,741	+\$6,519	. >1	
08		-(\$144)	+\$249	+\$105	+\$3,162	+\$0	>1	+\$4,252	+\$6,515	≥1,	
09	SCE/SoCalGas	-(\$170)	+\$271	+\$100	+\$3,014	+\$0	>1	+\$4,271	and the contract of the contra	>1	
10		-(\$199)	+\$280	+\$81	+\$2,440	+\$0	>1.	+\$3,629	+\$6,494	>1	
10	SDG&E	-(\$155)	+\$297	+\$143	+\$4,287	.+\$0	>1	+\$3,629	+\$6,494	>1	
11	,PG&E	-(\$426)	+\$447	+\$21	+\$630	+\$0	>1 -	+\$1,623	+\$6,504	>1	
12	PG&E	-(\$362)		+\$94	+\$2,828	+\$0	>1	+\$2,196	+\$6,525	>1	
13	16、14、6、2年 26 年 大統領政府首任 高原縣	-(\$370)	+\$413	+\$43	+\$1,280	+\$0	>1	+\$1,677	+\$6,509	>1	
14	[1] [1] [2] [2] [2] [2] [2] [2] [2] [2] [2] [2	-(\$416)	+\$413	-(\$4)	-(\$107)	+\$0	0	+\$2,198	+\$6,520	>1	
14	Ⅰ 프리는 다음에 되었다면 하는 나라는 사람들을 받는다. 다음에는	-(\$391)	+\$469	+\$79	+\$2,356	+\$0	>1	+\$2,198	+\$6,520	>1	
15	据证据的 人名英格兰斯 经有效的 经现代的	-(\$98)	+\$194	+\$97	+\$2,900	+\$0	>1	+\$2,456	+\$6,483	>1	
1.6	PG&E	-(\$878)	+\$712	-(\$166)	-(\$4,969)	+\$0	0	-(\$8,805)	+\$6,529	0.7	

¹Red values in parentheses indicate an increase in utility bill costs or an incremental first cost for the all-electric home. ²">1" indicates cases where there are both first cost savings and annual utility bill savings.



35

Table 15: Comparison of Single Family On-Bill Cost Effectiveness Results with Additional PV

		Neutral	Cost		Min. Cost Effectiveness					
	PV		Equipment	On-Bill			Equipment	On-Bill		
	Capacity	Utility Bill	Cost	B/C	PV Capacity	Utility Bill	Cost	B/C		
CZ Utility	(kW)	Savings	Savings	Ratio	(kW)	Savings	Savings	Ratio		
01 PG&E	4.7	-(\$4,704)	+\$0	-0	6.3	+\$6,898	-(\$6,372)	1.1		
14 SCE/SoCalGas	4.5	-(\$107)	+\$0	. 0	4.8	+\$1,238	-(\$1,000)	1.2		
16 PG&E	4.1	-(\$4,969)	+\$0	0	5.3	+\$5,883	-(\$4,753)	1.2		

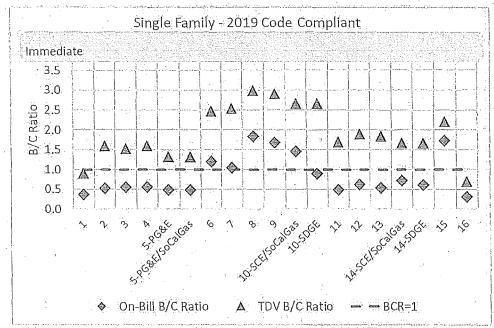


Figure 9: B/C ratio results for a single family all-electric code compliant home versus a mixed fuel code compliant home

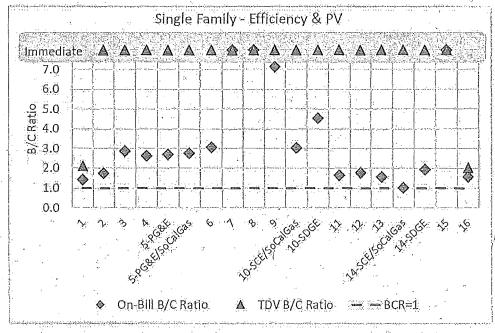


Figure 10: B/C ratio results for the single family Efficiency & PV all-electric home versus a mixed fuel code compliant home

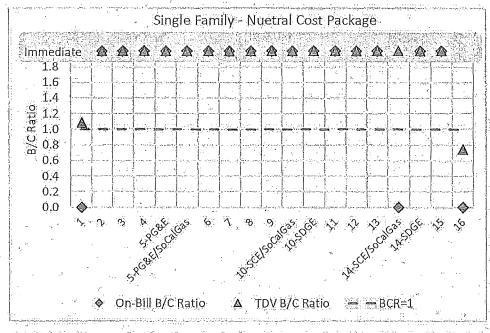


Figure 11: B/C ratio results for the single family neutral cost package all-electric home versus a mixed fuel code compliant home

Table 16: Multifamily Electrification Results (Per Dwelling Unit)

34. 34.					-effectivene	* 2 4 4			st-effectiver	iess
		Average /	Annual U	tility Bill	Li	fetime NPV		<u>Lif</u>	etime NPV	
			<u>Savings</u>							
				Net		Equipment	On-Bill		Equipment	TDV
			Natural	Utility	Utility Bill	Cost	в/с	TDV Cost	Cost	в/с
CZ	Utility	Electricity	Gas	Savings	Savings	Savings	Ratio ²	Savings	Savings	Ratio
				2019 C	ode Complia	int Home				
01	PG&E	-(\$396)	+\$193	-(\$203)	-(\$6,079)	+\$2,337	0.4	-(\$5,838)	+\$5,899	1.0
02	PG&E	-(\$310)	+\$162	-(\$148)	-(\$4,450)	+\$2,337	0,5	-(\$4,144)	+\$5,899	1.4
03	PG&E	-(\$277)	+\$142	-(\$135)	-(\$4,041)	+\$2,337	0.6	-(\$4,035)	+\$5,899	1.5
04	PG&E	-(\$264)	+\$144	-(\$120)	-(\$3,595)	+\$2,337	0.6	-(\$3,329)	+\$5,899	1.8
05	PG&E	-(\$297)	+\$140	-(\$157)	-(\$4,703)	+\$2,337	0.5	-(\$4,604)	+\$5,899	1.3
05	PG&E/SoCalGas	-(\$297)	+\$178	-(\$119)	-(\$3,573)	+\$2,337	0.7	-(\$4,604)	+\$5,899	1.3
06	SCE/SoCalGas	-(\$191)	+\$161	-(\$30)	-(\$902)	+\$2,337	2.6	-(\$2,477)		2.4
07	SDG&E	-(\$206)	+\$136	-(\$70)	-(\$2,094)	+\$2,337	1.1	-(\$2,390)	+\$5,899	2.5
08	SCE/SoCalGas	-(\$169)	+\$157	-(\$12)	-(\$349)	+\$2,337	6.7	-(\$2,211)	+\$5,899	2.7
09	SCE/SoCalGas	-(\$177)	+\$159	-(\$18)	-(\$533)	+\$2,337	4.4	-(\$2,315)	or and the second of the secon	2.5
10	SCE/SoCalGas	-(\$183)	+\$159	-(\$23)	-(\$697)	+\$2,337	3.4	-(\$2,495)	+\$5,899	2.4
10	SDG&E	-(\$245)	+\$139	-(\$106)	-(\$3,192)	+\$2,337	0.7	-(\$2,495)	+\$5,899	2.4
11	PG&E	-(\$291)	+\$153	-(\$138)	-(\$4,149)	+\$2,337	0.6	-(\$4,420)	+\$5,899	1.3
12	PG&E	-(\$277)	+\$155	-(\$122)	-(\$3,665)	+\$2,337	0.6	-(\$3,557)	+\$5,899	1.7
13	PG&E	-(\$270)	+\$146	-(\$124)	-(\$3,707)	the contract of the contract of	0,6	-(\$3,821)	and the second contraction of the second	1.5
14	SCE/SoCalGas	-(\$255)	+\$187	-(\$69)	-(\$2,062)	+\$2,337	1.1	-(\$3,976)		1.5
14	SDG&E	-(\$328)	+\$175	-(\$154)	-(\$4,607)	+\$2,337	0.5	-(\$3,976)	+\$5,899	1.5
15	SCE/SoCalGas	-(\$154)	+\$142	-(\$12)	-(\$367)	+\$2,337	6.4	-(\$2,509)		2.4
16	PG&E	-(\$404)	+\$224	-(\$180)		+\$2,337	0.4	-(\$5,719)	+\$5,899	1.0
					iency & PV I					
01	PG&E	-(\$19)	+\$193	+\$174	+\$5,230	-(\$3,202)	1.6	+\$2,467		>1
02	P.G&E	-(\$10)	+\$162	+\$152	+\$4,549	-(\$1,375)	3.3	+\$2,605	+\$2,187	>1
03	Principal Control of the Control of	-(\$12)	+\$142	+\$130	+\$3,910	-(\$936)	4.2	+\$1,632	+\$2,626	>1
04		-(\$8)	+\$144	+\$136	+\$4,080	-(\$822)	5.0	+\$2,381	+\$2,740	>1
05		-(\$19)	+\$140	+\$121	+\$3,635	-(\$956)	3.8	+\$1,403	+\$2,606	>1
05	Bartin Martin, 1984, No. 2, 1987, L.	100000000000000000000000000000000000000	+\$178	+\$159	+\$4,765	-(\$956)	5.0	+\$1,403	+\$2,606	>1
06	[18] P. B.	-(\$84)	+\$161	+\$77	+\$2,309	-(\$243)	9.5	+\$1,940	+\$3,319	>1
07	SDG&E	1 76 CH 117 C	+\$136	+\$87	+\$2,611	+\$75	>1	+\$1,583	+\$3,638	>1
08			+\$157	+\$83	+\$2,480	+\$96	>1	+\$1,772	+\$3,658	>1
09	I SECTION ASSESSMENT OF A SECTION ASSESSMENT	The second section of the second	+\$159	+\$82	+\$2,469	+\$104	>1	+\$1,939	+\$3,667	>1
10	 文学等等的特殊。如此、同时是一个人。 		+\$159	+\$80	+\$2,411	-(\$34)	70.9	+\$1,737	+\$3,528	>1
10		6 Mar 520 007 C of 2 12 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	+\$139	+\$61	+\$1,842	-(\$34)	54.2	+\$1,737	+\$3,528	>1
11	"上报"在1981年8月,在1997年6月,1997年6月,1997年	 Programme and the control of the contr	+\$153	+\$128	-+\$3,834	-(\$1,264)	3.0	+\$2,080	+\$2,298	>1
12			+\$155	+\$144	+\$4,316	-(\$1,498)	2.9	+\$2,759	+\$2,064	>1
13		1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	+\$146	+\$121	+\$3,625	-(\$1,125)	3.2	+\$2,083	+\$2,437	>1
14		14. 【14. 16. 16. 16. 16. 16. 16. 16. 16. 16. 16	+\$187	and the state of t	+\$2,616	-(\$1,019)	right and the second second	+\$2,422	+\$2,543	>1
14	A. [1] 14、14、12、12、12、12、12、12、12、12、12、12、12、12、12、	[4] F. P. M.	+\$175	+\$88	+\$2,647	-(\$1,019)	2.6	+\$2,422	建黄龙类形式 机工业产品 医甲基二甲基	>1
15	建设备 化双氯化氯化二甲基磺胺二甲基磺基甲基	I	+\$142	+\$75	+\$2,247	+\$511	>1	+\$1,276	+\$4,073	>1
16	PG&E	-(\$24)	+\$224	+\$200	+\$5,992	-(\$2,087)	2.9	+\$2,629	+\$1,476	>1



	计多数数据表示		On-Bill Cost-effectiveness						t-effectiven	iess
		Average A	Annual Ut	tility Bill	الأدر	etime NPV		Life	etime NPV	
			Savings							
4%) (5.4				Net		Equipment	On-Bill		Equipment	TDV
			Natural	Utility	Utility Bill	Cost	B/C	TDV Cost	Cost	в/с
CZ	Utility	Electricity	Gas	Savings	Savings	Savings	Ratio ²	Savings	Savings	Ratio
				Neu	tral Cost Pa	ckage				
01	PG&E	-(\$228)	+\$193	÷(\$35)	-(\$1,057)	+\$0	0	-(\$2,267)	+\$3,564	1.6
02	PG&E	-(\$115)	+\$162	+\$47	+\$1,399	+\$0	>1	+\$59	+\$3,563	>1
03	PG&E	-(\$81)	+\$142	+\$61	+\$1,843	+\$0	>1	+\$138	+\$3,562	>1
04	PG&E	-(\$64)	+\$144	+\$80	+\$2,402	+\$0	>1	+\$983	+\$3,563	>1
05	PG&E	-(\$90)	+\$140	+\$50	+\$1,490	+\$0	>1	-(\$152)	+\$3,564	23.4
05	PG&E/SoCalGas	-(\$90)	+\$178	+\$87	+\$2,620	+\$0	. >1	-(\$152)	+\$3,564	23.4
06	SCE/SoCalGas	-(\$90)	+\$161	+\$71	+\$2,144	+\$0	>1	+\$1,612	+\$3,562	>1
07	SDG&E	-(\$32)	+\$136	+\$105	+\$3,135	+\$0	>1	+\$1,886	+\$3,560	>1
08	SCE/SoCalGas	-(\$67)	+\$157	+\$90	+\$2,705	+\$0	>1	+\$1,955	+\$3,564	>1
09	SCE/SoCalGas	-(\$71)	+\$159	+\$87	+\$2,623	+\$0	>1	+\$1,924	+\$3,561	>1
10	SCE/SoCalGas	-(\$78)	+\$159	+\$81	+\$2,431	+\$0	- >1	+\$1,588	+\$3,561	>1
10	SDG&E	-(\$71)	+\$139	+\$68	+\$2,033	1 \$0	>1	+\$1,588	+\$3,561	>1
11	PG&E	-(\$93)	+\$153	+\$59	+\$1,783	+\$0	>1	-(\$48)	+\$3,562	74.0
12	PG&E	-(\$82)	+\$155	+\$73	+\$2,184	+\$0	>1	+\$739	+\$3,564	>1
13	PG&E	-(\$79)	+\$146	+\$68	+\$2,034	+\$0	>1	+\$310	+\$3,560	>1
14	SCE/SoCalGas	-(\$141)	+\$187	+\$45	+\$1,359	#\$0	>1	+\$747	+\$3,562	>1
14	SDG&E	-(\$137)	+\$175	+\$38	+\$1,131	+\$0	>1	+\$747	+\$3,562	>1
15	SCE/SoCalGas	-(\$50)	+\$142	+\$92	+\$2,771	+\$0	>1	+\$1,738	+\$3,560	>1
16	PG&E	-(\$194)	+\$224	+\$30	+\$900	+\$0	>1	-(\$1,382)	+\$3,564	2.6

¹Red values in parentheses indicate an increase in utility bill costs or an incremental first cost for the all-electric home. ²">1" indicates cases where there are both first cost savings and annual utility bill savings.

Table 17: Comparison of Multifamily On-Bill Cost Effectiveness Results with Additional PV (Per Dwelling Unit)

	See a see	to a contract to the contract of the contract	
¥.			Neutral Cost Min. Cost Effectiveness
3			PV Equipment PV Equipment
	智慧		Capacity Utility Bill Cost On-Bill Capacity Utility Bill Cost On-Bill
:	CZ	Utility	(kW) Savings Savings B/C Ratio (kW) Savings Savings B/C Ratio
	01	PG&E	2.7(\$1,057) +\$0 0 3.0 +\$1,198 -(\$1,052) 1.1

39 2019-08-01

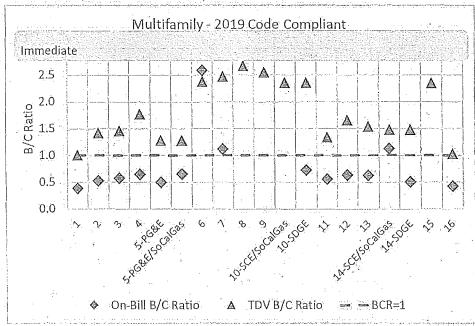


Figure 12: B/C ratio results for a multifamily all-electric code compliant home versus a mixed fuel code compliant home

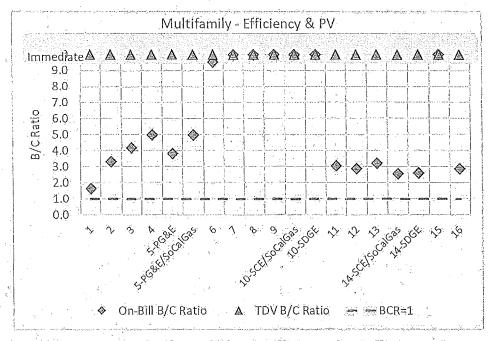


Figure 13: B/C ratio results for the multifamily Efficiency & PV all-electric home versus a mixed fuel code compliant home

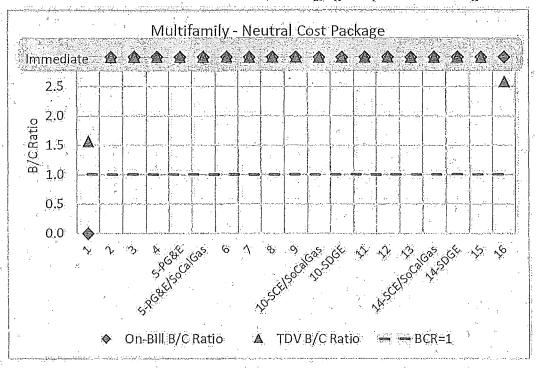


Figure 14: B/C ratio results for the multifamily neutral cost package all-electric home versus a mixed fuel code compliant home

4 Conclusions & Summary

This report evaluated the feasibility and cost-effectiveness of "above code" performance specifications through the application of efficiency measures, PV, and electric battery storage in all 16 California climate zones. The analysis found cost-effective packages across the state for both single family and low-rise multifamily buildings. For the building types and climate zones where cost-effective packages were identified, the results of this analysis can be used by local jurisdictions to support the adoption of reach codes. Cost-effectiveness was evaluated according to two metrics. On-Bill customer lifecycle benefit-to-cost and TDV lifecycle benefit-to-cost, While all the above code targets presented are based on packages that are cost-effective under at least one of these metrics, they are not all cost-effective under both metrics. Generally, the test for being cost-effective under the TDV methodology is less challenging than under the On-Bill methodology. Therefore, all packages presented are cost-effective based on TDV, and may or may not be cost-effective based on the On-Bill method. It is up to each jurisdiction to determine what metric is most appropriate for their application. A summary of results by climate zone are presented in Appendix G.—Results by Climate Zone.

Above code targets are presented as Target EDR Margin, which have been defined for each scenario where a cost-effective package was identified. Target EDR Margins represent the maximum "reach" values that meet the requirements. Jurisdictions may adopt less stringent requirements. For the Efficiency Package the Target EDR Margin was defined based on the lower EDR Margin of the Efficiency — Non-Preempted Package and the Efficiency — Equipment, Preempted Package. For example, if the cost-effective Non-Preempted package has an EDR Margin of 3 and the Preempted package an EDR Margin of 4, the Target EDR Margin is set at 3.

The average incremental cost for the single family Efficiency packages is \$1,750. The Efficiency & PV Package average incremental cost is \$9,180 and for the Efficiency & PV/Battery Package it is approximately \$5,600 for the

mixed fuel cases and \$15,100 for the all-electric cases. The incremental costs for each multifamily apartment are approximately 30-40% lower. See Table 8 and Table 11 for a summary of package costs by case.

Table 18 and Table 19 summarize the maximum Target EDR Margins determined to be cost effective for each package for single family and multifamily, respectively. Cases labeled as "n/a" in the tables indicate where no cost-effective package was identified under either On-Bill or TDV methodology.

This analysis also looked at the GHG emissions impacts of the various packages. An all-electric design reduces GHG emissions 40-50% in most cases relative to a comparable mixed fuel design.

There is significant interest throughout California on electrification of new buildings. The Reach Code Team assembled data on the cost differences between a code compliant mixed fuel building and a code compliant all-electric building. Based on lifetime equipment cost savings (the difference in first cost for equipment and infrastructure combined with incremental replacement costs) of \$5,349 for an all-electric single family home this analysis found that from a customer on-bill perspective, the all-electric code compliant option is cost-effective in Climates Zones 6 through 9, 10 (SCE/SoCalGas territory only), and 15, and cost-effective in all climate zones except 1 and 16 based on TDV. For multifamily buildings, based on a cost savings of \$2,337 per apartment, the code compliant option is cost-effective in Climates Zones 6 through 9, 10 & 14 (SCE/SoCalGas territory only), and 15, and cost-effective based on TDV.

Adding efficiency and PV to the code compliant all-electric buildings increases the cost-effectiveness in all climate zones. The Efficiency & PV Package is cost-effective when compared to a mixed fuel code compliant building in all climate zones for both single family and multifamily buildings based on both the On-Bill and TDV methodologies. The Efficiency & PV package adds PV to offset 90% of the electricity use of the home. While this results in higher installed costs, the reduced lifetime utility costs are larger (\$0 to \$6,000 lifetime incremental equipment costs in many climates for single family homes and an associated \$4,500 to \$13,500 lifetime utility cost savings across the same cases), resulting in positive B/C ratios for all cases.

The Reach Code Team also evaluated a neutral cost electrification scenario where the cost savings for the allelectric code compliant home is invested in a larger PV system, resulting in a lifetime incremental cost of zero based on the On-Bill approach. This package results in utility cost savings and positive on-bill B/C ratio in all cases except Climate Zones 1 and 16 for single family, and Climate Zone 1 for low-rise multifamily. Increasing the PV sizes in those climates by approximately 30% resulted in positive on-bill B/C ratios, while still not resulting in oversizing of PV systems.

Other studies have shown that cost-effectiveness of electrification increases with high efficiency space conditioning and water heating equipment in the all-electric home. This was not directly evaluated in this analysis but based on the favorable cost-effectiveness results of the Equipment, Preempted package for the individual mixed fuel and all-electric upgrades it's expected that applying similar packages to the electrification analysis would result in increased cost-effectiveness.

The Reach Code Team found there can be substantial variability in first costs, particularly related to natural gas infrastructure. Costs are project-dependent and will be impacted by such factors as site characteristics, distance to the nearest gas main, joint trenching, whether work is conducted by the utility or a private contractor, and number of homes per development among other things. While the best cost data available to the Reach Code Team was applied in this analysis, individual projects may experience different costs, either higher or lower than the estimates presented here.



Table 18: Summary of Single Family Target EDR Margins

	Table 10, Juninary of Single Family Target LDK Margins												
Ð		Mixe	d Fuel		All-Electric								
Climate	au07	Efficiency	Efficiency & PV/Battery	Efficiency	Efficiency & PV	Efficiency & PV/Battery							
	1	5.0	10.5	6.5	31.0	41.0							
. 0	2	3.0	10.0	4.5	19.0	30.0							
0)3.	2.5	10.0	4.0	18.0	29.0							
0)4	2.5	10.0	3.0	17.0	28.5							
0	5	2.5	9.0	4,0	18.0	28.5							
.0	6	1.5	9.5	2.0	14.0	26.0							
0)7	n/a	9.0	n/a	11.0	24.0							
0	8(1.0	8.0	1.5	10.5	21.5							
.0	9	2.5	8.5	2.5	11.5	21.0							
1	0	3.0	9.5	3.0	11.0	21.0							
1	1	4.0	9.0	4.5	14.0	23.0							
1	2	3.0	9.5	3.5	15.5	25.0							
1	3	4.5	9.5	5.0	13.0	22.0							
1	4	4.5	9.0	5.5	15.5	23.5							
1	5	4.5	7.0	5.5	6.0	13.0							
1	6	5.0	10.5	4.5	26.5	35.0							

Table 19: Summary of Multifamily Target EDR Margins

a)	Mixe	d Fuel		All-Electric	
Climate Zone	Efficiency	Efficiency & PV/Battery	Efficiency	Efficiency & PV	Efficiency & PV/Battery
01	2.0	11.5	3.0	22.5	34.5
02	1.5	10.5	1.5	17.5	30,5
03	0.5	10.0	n/a	16.0	29.5
04	1.0	11.0	1.0	15.0	28.5
05	0.5	9.5	0.5	17.0	30.0
06	1.0	10.5	1.0	13.5	27.5
07	0.5	11.0	0.5	12.5	27.0
80	1.0	9.5	1.0	11.5	24.0
09	1.5	9.5	1.5	11.0	23,0
10	1,5	10.0	1.5	10.5	23.0
11	2.5	10.5	3.5	13.0	25.0
12	1.5	10.0	2.5	14.0	26.5
13	3.0	10.5	3.0	12.0	23.5
14	3.0	9.5	3.5	14.0	24.5
- 15	4.0	8.5	4.0	7.0	16.5
16	2.0	9.5	3.0	19.5	29,5



5 References

California Energy Commission. 2017. Rooftop Solar PV System. Measure number: 2019-Res-PV-D Prepared by Energy and Environmental Economics, Inc. https://efiling.energy.ca.gov/getdocument.aspx?tn=221366

California Energy Commission. 2018a. 2019 Alternative Calculation Method Approval Manual. CEC-400-2018-023-CMF. December 2018. California Energy Commission. https://www.energy.ca.gov/2018publications/CEC-400-2018-023/CEC-400-2018-023-CMF.pdf

California Energy Commission, 2018b. 2019 Building Energy Efficiency Standards for Residential and Nonresidential Buildings. CEC-400-2018-020-CMF. December 2018. California Energy Commission. https://www.energy.ca.gov/2018publications/CEC-400-2018-020/CEC-400-2018-020-CMF.pdf

California Energy Commission. 2018c. 2019 Reference Appendices. CEC-400-2018-021-CMF. December 2018. California Energy Commission. https://www.energy.ca.gov/2018publications/CEC-400-2018-021/CEC-400-2018-021-CMF.pdf

California Energy Commission. 2018d. 2019 Residential Compliance Manual. CEC-400-2018-017-CMF. December 2018. California Energy Commission. https://www.energy.ca.gov/2018publications/CEC-400-2018-017-CMF. 2018-017-CMF.pdf

California Energy Commission. 2019. 2019 Residential Alternative Calculation Method Reference Manual. CEC-400-2019-005-CMF. May 2019. California Energy Commission.

https://www.energy.ca.gov/2019publications/CEC-400-2019-005/CEC-400-2019-005-CMF.pdf

California Public Utilities Commission. 2016. Rulemaking No. 15-03-010 An Order Instituting Rulemaking to Identify Disadvantaged Communities in the San Joaquin Valley and Analyze Economically Feasible Options to Increase Access to Affordable Energy in Those Disadvantages Communities. Proposed Decision of Commissioner Guzman Aceves. April 07, 2017. http://docs.cpuc.ca.gov/PublishedDocs/Efile/G000/M183/K389/183389022.PDF

Davis Energy Group, 2015. Evaluation of Ducts in Conditioned Space for New California Homes. Prepared for Pacific Gas and Electric Company: March 2015. https://www.etcc-ca.com/reports/evaluation-ducts-conditioned-space-new-california-homes

Energy & Environmental Economics, 2019. Residential Building Electrification in California. April 2019. https://www.ethree.com/wp-

content/uploads/2019/04/E3 Residential Building Electrification in California April 2019.pdf

EPRI. 2016. SMUD All-Electric Homes Electrification Case Study: Summary for the Three-Prong Test Discussion. Electric Power Research Institute, Inc. September. 2016. Presentation to Sacramento Municipal Utility District.

Horii, B., E. Cutter, N. Kapur, J. Arent, and D. Conotyannis. 2014. "Time Dependent Valuation of Energy for Developing Building Energy Efficiency Standards."

http://www.energy.ca.gov/title24/2016standards/prerulemaking/documents/2014-07-09 workshop/2017 TDV Documents/

Itron, 2014. 2010-2012 WO017 Ex Ante Measure Cost Study: Final Report, Itron. May 2014. Presented to California Public Utilities Commission.

Barbose, Galen and Darghouth, Naim. 2018. Tracking the Sun. Installed Price Trends for Distributed Photovoltaic Systems in the United States – 2018 Edition. Lawrence Berkeley National Laboratory. September 2018. https://emp.lbl.gov/sites/default/files/tracking the sun 2018 edition final 0.pdf

Navigant. 2018. Analysis of the Role of Gas for a Low-Carbon California Future. July 24, 2018. Prepared for Southern California Gas Company.

https://www.socalgas.com/1443741887279/SoCalGas Renewable Gas Final-Report.pdf



Penn, Ivan. 2018. Cheaper Battery is Unveiled as a Step to a Carbon-Free Grid. The New York Times. September 2018. https://www.nytimes.com/2018/09/26/business/energy-environment/zinc-battery-solar-power.html. Accessed January 29, 2019.

Statewide CASE Team, 2017a. Codes and Standards Enhancement (CASE) Initiative Drain Water Heat Recovery—Final Report. July 2017. http://title24stakeholders.com/wp-content/uploads/2017/09/2019-T24-CASE-Report DWHR Final September-2017.pdf

Statewide CASE Team. 2017b. Codes and Standards Enhancement (CASE) Initiative High Performance Attics — Final Report. September 2017. http://title24stakeholders.com/wp-content/uploads/2017/09/2019-T24-CASE-Report HPA-Final September 2017.pdf

Statewide CASE Team. 2017c: Codes and Standards Enhancement (CASE) Initiative High Performance Walls – Final Report. September 2017. http://title24stakeholders.com/wp-content/uploads/2017/09/2019-T24-CASE-Report HPW Final September-2017.pdf

Statewide CASE Team. 2017d. Codes and Standards Enhancement (CASE) Initiative Residential High Performance Windows & Doors – Final Report. August 2017. http://title24stakeholders.com/wp-content/uploads/2017/09/2019-T24-CASE-Report: Res-Windows-and-Doors: Final September-2017.pdf

Statewide CASE Team. 2018. Energy Savings Potential and Cost-Effectiveness Analysis of High Efficiency Windows in California. Prepared by Frontier Energy. May 2018. https://www.etcc-ca.com/reports/energy-savings-potential-and-cost-effectiveness-analysis-high-efficiency-windows-california

Statewide Reach Codes Team, 2016, CAL Green Cost-Effectiveness Study, Prepared for Pacific Gas and Electric Company, Prepared by Davis Energy Group, November 2016.

http://localenergycodes.com/download/50/file_path/fieldList/2016%20RNC%20Tiers%201-2%20Cost-Eff%20Report

Statewide Reach Codes Team. 2017a. CALGreen All-Electric Cost-Effectiveness Study. Prepared for Pacific Gas and Electric Company. Prepared by Davis Energy Group. October 2017.

http://localenergycodes.com/download/276/file-path/fieldList/2016%20RNC%20All-Electric%20Cost-Eff%20Report

Statewide Reach Codes Team. 2017b. 2016 Title 24 Residential Reach Code Recommendations: Cost-effectiveness Analysis for All California Climate Zones. Prepared for Southern California Edison. Prepared by TRC Energy Services. August 2017.

http://localenergycodes.com/download/283/file_path/fieldList/2016%20RNC%20Reach%20Code%20Tier%203 %20Cost-Eff%20Report

Statewide Reach Codes Team, 2018, PV + Battery Storage Study, Prepared for Pacific Gas and Electric Company, Prepared by EnergySoft, July, 2018.

http://localenergycodes.com/download/430/file_path/fieldList/PV%20Plus%20Battery%20Storage%20Report

Hopkins; Asa, Takahashi, Kenji, Glick, Devi, Whited, Melissa. 2018. Decarbonization of Heating Energy Use in California Buildings. Synapse Energy Economics, Inc. October 2018. http://www.synapse-energy.com/sites/default/files/Decarbonization-Heating-CA-Buildings-17-092-1.pdf

TRC. 2018. City of Palo Alto 2019 Title 24 Energy Reach Code Cost-effectiveness Analysis Draft. September 2018. https://cityofpaloalto.org/civicax/filebank/documents/66742



Appendix A - California Climate Zone Map



Figure 15: Map of California Climate Zones (courtesy of the California Energy Commission?7)

¹⁷ https://ww2.energy.ca.gov/maps/renewable/building climate zones.html



Appendix B – Utility Tariff Details

PG&E	. erriiis raii kaii ji ee kiiis arr	nak dan malanga kakanan ngabib.	i erri erri kristikan kan kan inga	deren bibliotenia al Ponto porbir a Pon	egati di reveni	Robert Contract Contract	48
SCE		,					
SoCalGas	4					9.50 g	
SDG&E							
Escalation Assumptions							



PG&E

The following pages provide details on the PG&E electricity and natural gas tariffs applied in this study. Table 20 describes the baseline territories that were assumed for each climate zone.

Table 20: PG&E Baseline Territory by Climate Zone

	Baseline
	Territory
CZ01	٧
CZ02	Χ
CZ03	T
CZ04	X
CZ05	Τ
CZ11	R
CZ12	S
CZ13	Ř
CZ16	Υ

The PG&E monthly gas rate in \$/therm was applied on a monthly basis for the 12-month period ending January 2019 according to the rates shown below.

Pacific Gas and Electric Company

Residential Non-CARE and CARE Gas Tariff Rates January 1, 2018, to Present (\$/therm)^{1/}

			7	Sec. 2014-11 4	5 850 F 4 5 15		A
	Advice	Minimum Transportation		17.5%		TOTAL Re	eric and the first terms of
Effective	Letter	Charge ²⁾	Procurement	Transpo		Non-(the transfer of the second
Date	Number	(perday)	Charge	Chai	rge ²¹	Schedules	Charge ³³
		1				(Non-	CARE)
	1 1			Baseline	Excess	Baseline	Excess
01/01/18	3918-G	\$0.09863	\$0,37310	50.91828	\$1.46925	\$1.29138	\$1.84235
02/01/18	3931-G	\$0.09863	\$0.40635	50.91828	\$1.46925	\$1,32463	\$1.87560
03/01/18	3941-G	\$0.09863	\$0,32103	50.91828	\$1.46925	\$1.23931	\$1.79028
04/01/18	3959-G	\$0.09863	50.34783	50,91828	\$1.46925	51.26611	\$1.81708
05/01/18	3969-G	\$0.09863	\$0.26995	50.91828	51,46925	\$1.18823	\$1,73920
06/01/18	3980-G	\$0.09863	50.21571	\$0.91828	\$1.46925	\$1,13399	\$1,68496
07/01/18	3984-G	\$0.09863	\$0.22488	\$0.93438	\$1.49502	\$1.15926	\$1.71990
08/01/18	3995-G	\$0.09863	\$0.28814	S0.9343B	\$1.49502	\$1.22252	\$1.78316
09/01/18	4008-G	\$0.09863	\$0.25597	\$0.93438	\$1.49502	\$1,19035	\$1.75099
10/01/18	4018-G	\$0.09863	\$0.27383	\$0.93438	\$1,49502	\$1.20821	\$1.76885
11/01/18	4034-G	\$0.09863	\$0,35368	\$0.93438	\$1.49502	\$1.28806	\$1.84870
12/01/18	4046-G	\$0.09863	\$0,42932	\$0.93438	\$1,49502	\$1.36370	\$1.92434
		an Carrier and	171 110 1 110	25.00(200		生物性物质	
01/01/19	4052-G	\$0.09863	S0.43394 ^{7/}	50.99414	\$1.59063	\$1.42808	\$2.02457

Effective July 1, 2005, the Transportation Charge vyit be no less than the Minimum Transportation Charge of \$0.09853 (per day). Applicable to Rate Schedule G-1 only

and does not apply to submetered tenants of master-metered customers served under gas Rate Schedule GS and GT.

Schedule G-PPPS (Public Purpose Program Surcharge) needs to be added to the TOTAL Non-CARE Charge and TOTAL CARE Charge for bill calculation. See Schedule G-PPPS for details and exempt customers.

CARE Schedules include California Solar Initiative (CSI) Exemption in accordance with Advice Letter 3257-G-A.

Per dwelling und per day (Mulifamily Service)

Per installed space per day (Mobilehome Park Service)

This procurement rate includes a charge of \$0,03886 per therm to reflect account balance amortizations in accordance with Advice Letter 3157-G.

Residential bill credit of (579.85) per household, annual bill credit occurring in the October 2018 bill cycle, thereafter in the April bill cycle.

easons: Winter=Hoy-Mar Summer=April-Oct





Revised Concelling Revised Cal. P.U.C. Sheet No. Cal. P.U.C. Sheet No.

43533-E

42728-E

ELECTRIC SCHEDULE E-TOU RESIDENTIAL TIME-OF-USE SERVICE

Sheet 4

RATES: (Contd.)

OPTION B TOTAL RATES

Total Energy Rates (\$ per kWh) Summer (all usage) Winter (all usage)

\$0.37165 (R) \$0.26882 (R) \$0.23441 (R) \$0.21561 (R)

Delivery Minimum Bill Amount (\$ per meter per day).

\$0,32854

California Climate Credit (per household, per semi-annual payment occurring in the April and October bill cycles)

Total bundled service charges shown on customer's bills are unbundled according to the component rates shown below. Where the delivery minimum bill amount applies, the customer's bill will equal the sum of (1) the delivery minimum bill amount plus (2) for bundled service, the generation rate times the number of kWh used. For revenue accounting purposes, the revenues from the delivery minimum bill amount will be assigned to the Transmission, Transmission Rate. Adjustments, Reliability Services, Public Purpose Programs, Nuclear Decominissioning, Competition Transition Charges, Energy Cost Recovery Amount, DWR Bond, and New System Generation Charges based on kWh usage times the corresponding unbundled rate component per kWh, with any residual revenue assigned to Distribution.***

UNBUNDLING OF OPTION B TOTAL RATES

Generation	PEAK	OFF-PEAK
Summer (all usage)	\$0,21238	\$0.10932
Winter (all usage):	\$0.10554	\$0.08574
Distribution**		
Summer (all usage)	\$0.10716 (R)	\$0.10716 (R)
Winter (all usage)	\$0.07853 (R)	\$0.07853 (R)
Transmission* (all usage)	\$0,0248	9 (R)
Transmission Rate Adjustments" (all usage)	\$0,0021	4
Reliability Services" (all usage)	\$0.0028	O .
Public Purpose Programs (all usage)	\$D.0141	
Nuclear Decommissioning (all usage)	\$0.0002	0 : :
Competition Transition Charges (all usage)	\$0.0013	2 ,i
Energy Cost Recovery Amount (all usage)	(\$0.000)	
DWR Bond (all usage)		3 (R)
New System Generation Charge (all usage)**	\$0.0022	8

Transmission, Transmission Rate Adjustments and Reliability Service charges are combined for presentation on customer bills.

(Continued)

Advice 5444-E Issued by 18-08-013 Robert S. Kenney Decision Vice President, Regulatory Affairs

Submitted Effective Resolution December 18, 2018 January 1, 2019



49

Distribution and New System Generation Charges are combined for presentation on customer bills. *** This same assignment of revenues applies to direct access and community choice aggregation



Revised Cancelling Revised Cal. P.U.C. Sheet No. Cal. P.U.C. Sheet No.

34735-G

San Francisco, California

GAS SCHEDULE G-1 RESIDENTIAL SERVICE

Sheet 1

APPLICABILITY:

This rate schedule! applies to natural gas service to Core End-Use Customers on PG&E's Transmission and/or Distribution Systems. To qualify, service must be to individually-metered single family premises for residential use, including those in a multifamily complex, and to separately-metered common areas in a multifamily complex where Schedules GM, GS, or GT are not applicable. Common area accounts that are separately metered by PG&E have an option of switching to a core commercial rate schedule. Common area accounts are those accounts that provide gas service to common use areas as defined in Rule 1.

Per D.15-10-032 and D.18-03-017, transportation rates include GHG Compliance Cost for non-covered entitles. Customers who are directly billed by the Air Resources Board (ARB), i.e., covered entitles, are exempt from paying AB 32 GHG Compliance Costs through PG&E's rates. A "Cap-and-Trade Cost Exemption" credit for these costs will be shown as a line item. on exempt customers' bills. 3, 4

TERRITORY:

Schedule G-1 applies everywhere within PG&E's natural gas Service Territory.

RATES:

Customers on this schedule pay a Procurement Charge and a Transportation Charge, per meter, as shown below. The Transportation Charge will be no less than the Minimum Transportation Charge, as follows:

Minimum Transportation Charge:		Per Day	-		
		\$0.09863	3 .		
,			<u>Therm</u>	,	
Procurement:	<u>Baselin</u> \$0.43394	E (I)	<u>Exce</u> \$0.43394	<u>ss</u> (I)	
Transportation Charge:	\$0.99414	(1)	\$1.59063	<u>(i)</u> .	
Total:	\$1.42808	(1)	\$2,02457	(1)	
California Natural Gas Climate Credit (per Household, annual payment	(\$25.45)	(L).			
occurring in October 2018 bill cycle, and		× .		ŧ	

Public Purpose Program Surcharge:

thereafter in the April bill cycle)

Customers served under this schedule are subject to a gas Public Purpose Program (PPP) Surcharge under Schedule G-PPPS.

See Preliminary Statement, Part B for the Default Tariff Rate Components.

The Procurement Charge on this schedule is equivalent to the rate shown on informational Schedule G-CP—Gas Procurement Service to Core End-Use Customers.

(Continued)

Advice	4052-G	Issued by	Submitted	December 21, 2018
Decision	97-10-065 & 98-	Robert S. Kenney	Effective	January 1, 2019
	07-025	Vice President, Regulatory Affairs	Resolution	1.4



50

PG&E's gas tariffs are available online at www.pge.com.

Covered entities are not exempt from paying costs associated with LUAF Gas and Gas used by Company

The exemption credit will be equal to the effective non-exempt AB 32 GHG Compliance Cost Rate (\$ per therm). included in Preliminary Statement - Part B, multiplied by the customer's billed volumes (therms) for each billing

PG&E will update its billing system annually to reflect newly exempt or newly excluded customers to conform with lists of Directly Billed Customers provided annually by the ARB.

The Minimum Transportation charge does not apply to submetered tenants of master-metered customers served under gas rate Schedules GS and GT.

SCE

The following pages provide details on are the SCE electricity tariffs applied in this study. Table 21 describes the baseline territories that were assumed for each climate zone.

Table 21: SCE Baseline Territory by Climate Zone

·	Baseline
	Territory
CZ06	6
CZ08	8 -
CZ09	9
CZ10	10
CZ14	14
CZ15	15

	Delivery	Generation	Total Rate
TOU-Default-Rate-1 (On-Peak 4:00 pm - 9:00 pm)	. ,		
Energy Charge - \$/kWh		s	
Summer Season - On-Peak	0.19880	0.20072	0.39952
Mid-Peak	0.19880	0.05948	0.25828
Off-Peak	0.15574	0.06023	0.21597
		-	•
Winter Season - Mid-Peak	0.19880	0.08308	0.28188
Off-Peak	0.15574	0.11309	0.26883
Super-Off-Peak	0.15062	0.01344	0_16406
Basic Charge - \$/day			
Single-Family Residence	0.031	0.000	0.031
Multi-Family Residence	0_024	0.000	0.024
		+	************
Minimum Charge - \$/day	-	F	
Single Family Residence	0_338	0.000	0.338
Multi-Family Residence	0.338	0.000	0.338
	**		a
Baseline Credit - \$/kWh	(0.06512)	0.00000	(0.06512)

			Delivery	Generation	Total Rate
	· ·		-		
rou-d-	Rate PRIME		en e		- 4
	Energy Charge - \$/k	Wh			* * *
)	Summer Season - On-Peak	0.15926	0.19811	0.35737
1.		Mid-Peak	0.15926	0.10092	0.26018
N 2		Off-Peak	0.08308	0.04687	0.1299
•		Winter Season - Mid-Peak	0.16268	0.16761	0.3302
	The state of the s	Off-Peak	0.08081	0.04331	0.1241
		Super-Off-Peak	0.08081	0_04331	0.1241
	Customer Charge	\$/day	0.395	0.000	0.39

TOU Period	Weel	Weekdays		s and Holidays
100 Fellou	Summer	Winter	Summer	Winter
On-Peak	4 p.m 9 p.m.			
Mid-Peak		4 p.m 9 p.m.	4 p.m 9 p.m.	4 p.m 9 p.m.
Off-Peak	All other hours	9 p.m 8 a.m.	All other hours	9 p.m 8 a.m.
Super-Off-Peak		8 a.m 4 p.m.		8 a.m 4 p.m.

PROPOSED (7 Year Average 2010-2016)

Summ	er kWb p	er Day	Winte	r kWh pe	er Day
Baseline Region	Basic	All Electric	Baseline Region	Basic	All Electric
0.5	17.2	17.9	05	18.7	29.1
06	11.4	8.8	06	11.3	13,0
08	12,6	9.8	08	10,6	12.7
09	16.5	12.4	09	12.3	14.3
10	18.9	15.8	10	12.5	17.0
13	22.0	24.6	13	12.6	24.3
14	18.7	18.3	1.4	12.0	21.3
15	46,4	24.1	15	9,9	18,2
16	14.4	13.5	16	12.6	23.1

SoCalGas

Following are the SoCalGas natural gas tariffs applied in this study. Table 22 describes the baseline territories that were assumed for each climate zone.

Table 22: SocalGas Baseline Territory by Climate Zone

Baseline
Territory
2
1
1
1
1
2
1

SOUTHERN CALIFORNIA GAS COMPANY Revised LOS ANGELES, CALIFORNIA CANCELING Revised CAL PUC SHEET NO. 55854-G CAL PUC SHEET NO.

Schedule No. GR RESIDENTIAL SERVICE (Includes GR. GR.-C and GT-R Rates)

Sheet 1

APPLICABILITY

The GR rate is applicable to natural gas procurement service to individually metered residential customers:

The GR-C; cross-over rate, is a core procurement option for individually metered residential core transportation customers with annual consumption over 50,000 therms, as set forth in Special Condition 10.

The GT-R rate is applicable to Core Aggregation Transportation (CAT) service to individually metered residential customers, as set forth in Special Condition 11.

The California Allemate Rates for Energy (CARE) discount of 20%; reflected as a separale line item on the bill, is applicable to income-qualified households that meet the requirements for the CARE program as set forth in Schedule No. G-CARE.

TERRITORY

Applicable throughout the service territory.		
RATES GR	GR-C	GT-R
Customer Charge, per meter per day:	16.438¢	16.438¢
For "Space Heating Only" customers, a daily		
Customer Charge applies during the winter period	4, 4	
from November 1 through April 30th	33.1496	. 33'149¢
Baseline Rate, per them (baseline usage defined in Special Conc. Procurement Charge: 41.5896 Transmission Charge: 63.5666 Total Baseline Charge: 105.1556	42,676¢ 63,566¢ 106,242¢	N/A <u>63.5666</u> 63.5666
Non-Baseline Rate, per them (usage in excess of baseline usage);	* Suday
Procurement Charge: 7	42.070c	N/A
Transmission Charge: 96.8066	96.806c	96.806c
Total Non-Baseline Charge: 1383956	139.482¢	96.806
	11	

For the summer period beginning May 1 through October 31, with some exceptions, usage will be accumulated to at least 20 Ccf (100 cubic feet) before billing.

(Footnotes continue next page.)

(TO BE INSERTED BY UTILITY) ADVICE LETTER NO. 5410 DECISION NO.

(Continued) ISSUED BY Dan Skopec Vice President Regulatory Affairs

(TO BE INSERTED BY CAL' PUC) SUBMITTED Jan 7, 2019
EFFECTIVE Jan 10, 2019
RESOLUTION NO. G-3351



53

SDG&E

Following are the SDG&E electricity and natural gas tariffs applied in this study. Table 23 describes the baseline territories that were assumed for each climate zone.

Table 23: SDG&E Baseline Territory by Climate Zone

•	JUDULII	TO A CALLECT
	:	Baseline
		Territory
	CZ07	Coastal
	CZ10	Inland
	CZ14	Mountain

San Diego, Carle Company San Diego, California Cancelling Revised Cal. P.U.C., Sheet No. 31103-E	
RESIDENTIAL TIME-OF-USE	
RESIDENTIAL TIME-OF-USE	
CATES Otal Rates: DWR-BC EECC Rate + Rate Total Rate Description - TOU DR1 UDC Total Rate DWR-BC EECC Rate + Rate Total Rate Summer: On-Peak 0.22562 R. 0.00503 R. 0.35013 R. 0.65075 R. 0.75Peak On-Peak 0.22562 R. 0.00503 R. 0.11235 R. 0.41300 R.	
Otal Railes: Otal Railes: OWR-BC EECC Rate + Raile Total Raile Description - TOU DR1 UDC Total Raile DWR-BC EECC Rate + Raile Total Raile Summer: On-Peak 0.22562 R. 0.00503 R. 0.35013 R. 0.65075 R. 0.65075 R. 0.67Peak 0.22562 R. 0.00503 R. 0.11226 R. 0.41300 R. 0.413	
Otal Railes: Otal Railes: OWR-BC EECC Rate + Raile Total Raile Description - TOU DR1 UDC Total Raile DWR-BC EECC Rate + Raile Total Raile Summer: On-Peak 0.22562 R. 0.00503 R. 0.35013 R. 0.65075 R. 0.65075 R. 0.67Peak 0.22562 R. 0.00503 R. 0.11226 R. 0.41300 R. 0.413	
Description − TOU DR1 UDC Total Rale DWR-BC EECC Rate + Total Rate DWR Credit Rate Summer: On-Peak 0.22562 R 0.00503 R 0.35013 R 0.65078 R 0.75-Peak 0.25502 R 0.00503 R 0.11235 R 0.41300 R	
Discription	
Summer: On-Peak 0.22562 R.0.00503 R. 0.35013 R. 0.65075 R. On-Peak 0.22562 R.0.00503 R. 0.11235 R. 0.41390 R.	
On-Peak 0.22562 R 0.00503 R 0.35013 R 0.65075 R Off-Peak 0.22562 R 0.00503 R 0.11235 R 0.41390 R	
	l
Super Off-Peak 0.29582 R 0.00503 R 0.05739 R 0.35804 R	
Super Cff-Peak 0.29592 R 0.00503 R 0.05739 R 0.35804 R	
On-Peak 0.32037 R 0.00503 R 0.07616 R 0.40158 R	
Off-Peak 0.32037 R 0.00503 R 0.005762 R 0.39302 R Super Off-Peak 0.32037 R 0.00503 R 0.05312 R 0.38352 R	
Summer Baseline Adjustment Credit up to (0.19921) I (0.19921) I	
Winter Baseline Adjustment Credit up to (0.16853) I (0.16853) I (0.16853) I	-
Minimum Bil (\$(day) 0.329 0.329	
EECC Total	
Description - TOU	
Summer — CARE	
Rafest: On-Peak 0.29494 R 0.00000 0.35013 R 0.64507 R 0.41628 R	ı
Off-Peak 0.29424 R 0.00000 0.11235 R 0.40720 R 0.28077 R	1
Super Off-Peak 0.29494 R 0.00200 0.05739 R 0.35233 R 0.22493 R	
	1
On-Pesk 0,31969 R 0,00000 0,07618 R 0,39597 R 0,25330 R	l
	1
anter orietem material to annount annount it institut if institut	1
Summer Baseline Adjustment Credit up to (0.19921) 1 (0.13023) 1	1.
130 W of Baseline	1
Adjustment Credit up to (0.16863) 1 (0.16853) 1 (0.11022) 1	1
130% of Baseline	
	1
Ori-Peak 0.31869 R 0.00000 0.00762 R 0.38731 R 0.24770 R Super Ori-Peak 0.31869 R 0.60000 0.05812 R 0.37781 R 0.24149 R Summer Baseline Adjustment Credit up to (0.19921) I (0.19921) I (0.13028) I 130% of Baseline	

54

Revised Cal. P.U.C. Sheet No.

23614-G

San Diego Gas & Electric Company San Diego, California

Cal. P.U.C. Sheet No. Canceling Revised

23601-G

SCHEDULE GR

Sheet 1

RESIDENTIAL NATURAL GAS SERVICE (Includes Rates for GR, GR-C, GTC/GTCA)

APPLICABILITY

The GR rate is applicable to natural gas procurement service for individually metered residential customers.

The GR-C, cross-over rate, is a core procurement option for individually metered residential core transportation customers with annual consumption over 50,000 therms, as set forth in Special Condition 10.

The GTC/GTCA rate is applicable to intrastate gas transportation-only services to individually metered residential customers, as set forth in Special Condition 11.

Customers taking service under this schedule may be eligible for a 20% California Alternate Rate for Energy (CARE) program discount, reflected as a separate line item on the bill, if they qualify to receive service under the terms and conditions of Schedule G-CARE.

TERRITORY

Within the entire territory served natural gas by the utility.

RATES	GR	GR-C	GTOGTONI
Baseline Rate, per therm (baseline usage defined in Speci			STOROTON
Procurement Charge ^{-2/}	\$0.41614	\$0.41614 R	N/A
Transmission Charge:	<u>\$1.01230</u>	\$1.01230	<u>\$1.01230</u>
Total Baseline Charge:	\$1.42844	\$1.42844 R	\$1.01230
Non-Baseline Rate, per therm (usage in excess of baseline Procurement Charge; ² Transmission Charge; Total Non-Baseline Charge;	susage): \$0.41614 \$1.19980 \$1.61594	\$0.41614 R \$1.19980 \$1.61594 R	NVA \$1.19980 \$1.19980
Minimum Bill, per day: ^{3/} Non-CARE customers: CARE customers:	\$0.09863 \$0.07890	\$0.09863 \$0.07890	\$0.09863 \$0.0789 0

The rates for core transportation-only customers, with the exception of customers taking service under Schedule GT-NGV, Include any FERC Settlement Proceeds Memorandum Account (FSPMA) credit adjustments.

(Continued) 1C5 issued by Submitted Jan 7, 2019 Dan Skopec 2735-G Jan 10, 2019 Advice Ltr., No. Effective Vice President Regulatory Affairs Decision No. Resolution No

This charge is applicable to Utility Procurement Customers and includes the GPC and GPC-A Procurement Charges

shown in Schedule GPC which are subject to change monthly as set forth in Special Condition 7:

Effective starting May 1, 2017, the minimum bill is calculated as the minimum bill charge of \$0.09883 per day times:

the number of days in the billing cycle (approximately \$3 per month) with a 20% discount applied for CARE customer resulting in a minimum bill charge of \$0.07890 per day (approximately \$3.40 per month)

Escalation Assumptions

The average annual escalation rates in the following table were used in this study and are from E3's 2019 study Residential Building Electrification in California (Energy & Environmental Economics, 2019). These rates are applied to the 2019 rate schedules over a thirty-year period beginning in 2020. SDG&E was not covered in the E3 study. The Reach Code Team reviewed SDG&E's GRC filing and applied the same approach that E3 applied for PG&E and SoCalGas to arrive at average escalation rates between 2020 and 2022.

Table 24: Real Utility Rate Escalation Rate Assumptions

Statewide Electric Natural Gas Residential Core Rate
Residential (%/yr escalation, real)
Average Rate

	(%/year, real)	PG&E	<u>SoCalGas</u>	SDG&E
2020	2.0%	1.48%	6.37%	5.00%
2021	2.0%	5.69%	4.12%	3.14%
2022	2.0%	1.11%	4.12%	2.94%
2023	2.0%	4.0%	4.0%	4.0%
2024	2.0%	4.0%	4.0%	4.0%
2025	2.0%	4.0%	4.0%	4.0%
2026.	1.0%	1.0%	1.0%	1.0%
2027	1.0%	1.0%	1.0%	1.0%
2028	1.0%	1.0%	1.0%	1.0%
2029	1.0%	1.0%	1.0%	1.0%
2030	1.0%	1.0%	1.0%	1.0%
2031	1.0%	1.0%	1.0%	1.0%
2032	1.0%	1.0%	1.0%	1.0%
2033	1.0%	1.0%	1.0%	1.0%
2034	1.0%	1.0%	1.0%	1.0%
2035	1.0%	1.0%	1.0%	1.0%
2036	1.0%	1.0%	1.0%	1.0%
2037	1.0%	1.0%	1.0%	1.0%
2038	1.0%	1.0%	1.0%	1.0%
2039	1.0%	1.0%	1.0%	1.0%
2040	1.0%	1.0%	1.0%	1.0%
2041	1.0%	1.0%	1.0%	1.0%
2042	1.0%	1.0%	1.0%	1.0%
2043	1.0%	1.0%	1.0%	1.0%
2044	1.0%	1.0%	1.0%	1.0%
2045	1.0%	1.0%	1.0%	1.0%
2046	1.0%	1.0%	1.0%	1.0%
2047	1.0%	1.0%	1.0%	1.0%
2048	1.0%	1.0%	1,0%	1,0%
2049	1.0%	1.0%	1.0%	1.0%



Appendix C - Single Family Detailed Results

Table 25: Single Family Mixed Fuel Efficiency Package Cost-Effectiveness Results

				BASECASE			17.18			Non-Pre	mptec				Equipment - Preempted							
CZ	Utility	Total EDR	Efficiency EDR	CALGreen Tier 1 EDR Target		PV.kW	Total EDR	Efficiency EDR	Efficiency EDR Margin	%.Comp Margin	lbs.CO2 per	PV KW	On-BIII B/C Ratio	TDV B/C Ratio	Total EDR	Efficiency EDR	Efficiency EDR Marein		lbs CO2 per sqft	PV KW	On-Bill B/C Ratio	TDV B/C Ratio
1	PG&E	32.5	54.2	23	3.0	χ.	27.9	49.0	5,3	18.8%	- 2.5	3.2	3.4	2.8	26.0	47.3	6.9	25.1%	2.3	3.2	4.9	4,1
2	PG&E	25.0	46.0	12	2.2	2.8	22.0	42.7	3.3	16.3%	1.9	2.8	1.6	1.7	21.8	42.6	3.3	16.4%	1,9	2.8	3.8	3.6
3	PG&E	23.9	46.9	10	1.9	2.7-	21.3	43.9	3.0	16.7%	1.6	2,7	1.3	1.3	20.1	42.8	4.1	22.8%	1.5	2.7	1.9	2.0
4	PG&E	23.1	44,9	8	1.9	2.7	20.8	42.4	-2:5	13.9%	1.7	2.7	0.9	1.2	20.5	42.2	2.7	14.9%	1.6	2.7	2.4	2.7
5	PG&E	22.2	44.4	10	1.8	2.6	19.7	41.7	2.7	16.7%	1.6	2.5	1.1	1.2	19.7	41.7	2.6	16.2%	1.5	2.5	2.3	2.5
5-	PG&E/SoCalGas	22.2	44.4	10	1.8 2	2.6	19.7	41.7	2.7	16.7%	1.6	2.5	z 0.9 -	1,2	19.7	41.7	2.6	16,2%	1.5	2,5	2.0	2.5 -
6	SCE/SoCalGas	23.3	49.9	10	1.6	2.7	21.5	47.8	2.0	12.1%	1.5	2.7	0.7	1.2	21.5	47.9	2.0	11.8%	1.4	2.7	1.6	2.0
7	SDG&E	20.3	49.1	5	1.3	2.6.	20.3	49.1	0.0	0.0%	1.3	2.6			18.8	47.6	÷1.5	:12.4%	1.2	2.6	1.5	1.4
8	SCE/SoCalGas	21.3	46.9	10	1.4	2.9	20.1	45.6	1.3	7.7%	1.3	2,9	0.6	1.4	19.7	45.3	1.6	9.4%	1.3	2.9	1.3	1.8
9_	SCE/SoCalGas	24.5	47.7	13	1.5	2.9	22.3	45.1	2.6	11.7%	1.5	2.9	0.7	2.0	21.9	44.8	2.9	13.4%	1.4	2.9	1.8	3.7
10	SCE/SoCalGas	24.2	46.3	10	1.6	3.0	21.7	43:1	3.2	14.3%	1.5	3.0	0.6	1.3	21,5	43:1	3,2	14.6%	1.4	3.0	2.0	3.8
10	SDG&E	24.2	46.3	10	1.6	0.5	21.7	43.1	3.2	14:3%	1.5	3.0	8.0	1.3	21.5	43'.1	3.2	14.6%	1.4	3.0	2.6	3.8
11	PG&E	24.6	44.9	11	2.1	3.6`	21.3	40.6	4.3	16.4%	1.9	3.4	₹0,8	1.2	20,7	39.9	5.1	19.2%	1.8	3.4	2.5	3.7
12	PG&E	25.5	44.8	12	2.1 0	0.8	22.5	41.3	3.5	14.9%	1.9	2.9	1.2	1.8	22.5	41.4	3.4	14.4%	1.9	3.0	3.3	4.6
13	PG&E	25.7	46.5	11	2.0	8.8	22.2	41.9	4.6	16.9%	1.8	3.6	0.8□	1.3	21.2	40.7	5,8	21.4%	1.7	3.6-	5.3	8.4
14	SCE/SoCalGas	25.3	46.3	.15	2.3	.2	21.5	41.3	5.0	18.5%	2.1	3.0	1.6	2.5	20.8	40.4	5.8	21.7%	2.0	3.0	4:0	6.1
14	SDG&E	25.3	46.3	15	2,3	.2	21.5	41.3	5,0	18.5%	2.1	3.0	1.9	2.5	20.8	40.4	5.8	21.7%-	2.0	3.0	4.9	6.1
15	SCE/SoCalGas	22.4	49.1	11	1.7 - 5	4	19.7	44.3	4.8	14.8%	1.6	5.0	1.0	1.6	19.5	44.1	5.0	15.4%	1.5	5.0	>1	>1
16	PG&E	30.4	48.9	22	3.3 2	.7	25.0	43.5	5.4	20.6%	2.6	2.7	1.6	1.5	24.8	42.7	6.2	23.5%	2.7	2.6	2.2	2.2

[&]quot;>1" = indicates cases where there is both first cost savings and annual utility bill savings.



Table 26: Single Family Mixed Fuel Efficiency & PV/Battery Package Cost-Effectiveness Results

			BASECASE	T. C.			<u></u>		ency & PV/			
							Tabal					
		Total	CALGreen Tier 1	lbs CO2	PV	Total	Total EDR	% Comp	lbs CO2	PV	On-Bill B/C	TDV B/C
CZ	Utility	EDR	EDR Target	per sqft	kW	EDR	Margin	Margin	per sqft	kW	Ratio	Ratio
1	PG&E	32.5	23	3.0	3.3	21.9	10.6	31,8%	2.4	.3.3	0.9	1.6
2	PG&E	25.0	12	2.2	2.8	14.9	10.1	27.3%	1.8	2.9	0.5	1.6
3	PG&E	23.9	10	1.9	2.7	13.9	10.0	27.7%	1.5	2.8	0.4	1,4
4	PG&E	23.1	8	1.9	2.7	13.0	10.1	24.9%	1,5	2.8	0.3	1.5
5	PG&E	22.2	10	1.8	2.6	12.8	9.4	29.7%	1.4	2.6	0.4	1.3
51	PG&E/SoCalGas	22.2	10	1.8	2.6	12.8	9.4	29.7%	1.4	2.6	0.3	1.3
6	SCE/SoCalGas	23.3	10	1.6	2.7	13.6	9.8	20.1%	1.2	2.8	0.8	1.3
7:	SDG&E	20.3		1.3	2.6	11.1	9.2	9.0%	1.0	2.7	0.1	1.3
8	SCE/SoCalGas	21.3	10	1.4	2.9	12.9	8.4	23.7%	1.1	3.0	0.9	1.3
9	SCE/SoCalGas	24.5	13	1.5	2.9	15.7	8.8	24.7%	1.2	3.0	1.0	1.5
10	SCE/SoCalGas	24.2	10	1.6	3.0	14.6	9.6	27.3%	1.3	3.1	1,0	1.5
10	SDG&E	24.2	10	1.6	3.0	14.6	9.6	27.3%	1.3	3.1	0.6	1.5
11	PG&E	24.6	11	2.1	3.6	15.4	9.2	29.4%	1.8	3.5	0.4	1.5
12	PG&E	25.5	12	2.1	3.0	15.9	9.6	28,9%	1.8	3.0	0.4	1.7
13	PG&E	25.7	11	2.0	3.8	16.1	9.7	28.9%	1.7	3.7	0.4	1.6
14	SCE/SoCalGas	25.3	15.	2.3	3.2	16.3	9.0	30.1%	1.8	3.1	1.3	1.7
14	SDG&E	25.3	15	2.3	3.2	16.3	9.0	30.1%	1.8	3.1	1.2	1.7
15	SCE/SoCalGas	22.4	11	1.7	5.4	15.3	7.1	25.1%	1.4	5.1	1.1	1.5
16	PG&E	30.4	22	3.3	2.7	19.9	10.5	32.6%	2.4	2.8	0.9	1.4

[&]quot;>1" = indicates cases where there is both first cost savings and annual utility bill savings.



2019 Energy Efficiency Ordinance Cost-effectiveness Study
Table 27: Single Family All-Electric Efficiency Package Cost-Effectiveness Results

				ASECAS	100 100 100 100				100 0	Non-Pree	3 10 1			100 E			- <u>Equipm</u>	ent - Pree	mpted			
CZ	Utility	Total EDR	Efficiency EDR	CALGreen Tier 1 EDR Target	lbs CO2 per saft	PV kw	rotal EDR	Efficiency EDR	Efficiency EDR Margin	% Comp Margin	lbs CO2 per sqft	PV KW	On-Bill B/C Ratio	TDV B/CRatio	Total EDR	Efficiency EDR	Efficiency EDR Margin	% Comp Margin	lbs CO2 per sqft	PV.KW	On-Bill B/C Ratio	TDV B/CRatio
1	- PG&E	46.8	68.2	36	1.5	3.3	31.8	53.0	15.2	40.2%	1.0	3.3	1.8	1.7	39.9	61.3	6.9	18.3%	1.3	3.3	2.9	2.7
2	PG&E	32,8	.53.7	16	1.1	2.8	27.9	48.7	4.9	20.5% .	0.9	2.8	1.2	1,1	27.7	48.5	5.1	21.2%	0.9	2.8	2.3	2.1
3	PG&E	33،1	55,6	14	1.0	2.7	28.5	50.9	4.7	20.6%	0.8	2.7	2.6	2.4	28.7	51.2	4.4	.19.6%	0,9	2.7	1.8	1.6
4	PG&E	31.3	52.8	12	1.0	2.7	27.9	49.4	3.4	15.5%	0.9	2.7	1.9	1.8	27.4	48.9	3.9	17.6%	:0.9	2.7	1.5	1.5
- 5	PG&E	32.5	54.2	16	1.0	2.6	28.1	49.9	4.4	19.7%	0.9	2.6	2.6	2.3	28.0	49.8	4.4	20.3%	0.9	2.6	1.9	1.7
5	PG&E/SoCalGas	32.5	54.2	16	1.0	2.6	28.1	49.9	4.4	19.7%	0,9	2.6	2.6	2.3	28.0	49.8	4,4	20.3%	0.9	2.6	1.9	1.7
- 6	SCE/SoCalGas	29.7	55.8	12	0.9	2.7	27.7	53.8	2.0:	10,9%	-0.8	2.7	1.3	1.4	26.8	53.0	2.9	16.0%	0.8	2.7	2.2	2.3
7	SDG&E	27.1	55.3	7	0.7	2.6	27.1	55.3	0.0	0.0%	0.7	2.6			24.8	53.0	2.2	16.9%	0.7	2.6	1.6	1.7
8	SCE/SoCalGas	26.1	51.5	10	0.8	2.9	24.5	49.9	1.6	8.9%	0.8	- 2.9	0.6	1.2	24.4	49.7	1.8	9.7%	0.8	2.9	2.8	3.0
9	SCE/SoCalGas	28.8	51.9	, 13	0.9	2.9	26.0	49.1	2.8	12.5%	0.8	2,9	0.8	2.0	25.5	48.6	3.3	14.7%	0.8	2.9	2,1	3.2
10	SCE/SoCalGas	28.8	50.7	11	0.9	3.0	25.7	47.6	3.1	14.0%	0.9	3.0	0.9	1.5	25.3	47.2	3.4.	15.5%	0.8	3.0	2.3	3.2
10	SDG&E	28.8	50.7	11	0.9	3.0	25.7	47.6	3.1	14.0%	0.9	3.0	1.1	1.5	- 25.3	47.2	3.4	15.5%	0:8	3.0	2,6	3.2
11	PG&E	30.0	50.2	12	1.1	3.6	25.4	45.6	4.6	16.2%	1.0	3.6	1.2	1.5	24.1	44.3	5,9	20.8%	0.9	3.6	3.0	3.3
12	PG&E	30.9	50.1	13	1.0	3.0	27.1	46.3	3.8	15.3%	0.9	3,0	0.8	1.1	25.8	45.0	5.1	20.4%	0.9	3.0	2.0	2.5
13	PG&E	30.7	51.5	13	1.1	:3 . 8	25.7	46.4	5.1	17.4%	0.9	.3.8	1.1	1.4	24.7	45.4	6.0	20.9%	0.9	.3.8	.2.9	3.3
14	SCE/SoCalGas	31.3	52.2	16	1.4	3.2	25.7	46.6	5.6	18.9%	1.2	3.2	1.0	1.5	25.3	46.2	6.0	20.5%	1.2	3.2	2.3	3.1
14	SDG&E	31.3	52.2	16	1.4	3.2	25.7	46.6	5:6	18.9%	1.2	3.2	1.3	1,5	25.3	46.2	_6.0	20.5%	1.2	3.2	2.9	3.1
15	SCE/SoCalGas	26.2	52.8	8	1.3	5.4	20.6	47.2	5.6	16.8%	1.1	5,4	1.1	1.6	18:9	45.5	7.3	21.8%	1.0	5.4	3.3	4.5
16	PG&E	46.5	64.6	39	1.7	2.7	36.8	54.9	9.7	25.2%	1,4	2.7	1.7	1.7	41.6	59.7	4.9	12.7%	1.6	2.7	2.4	2.3

Table 28: Single Family All-Electric Efficiency & PV-PV/Battery Package Cost-Effectiveness Results

100 miles 100 mi			BASECA						ncy & F	30.00					Efficiency		100 100 1		
CZ	Utility	Total EDR	CALGreen Tier 1 EDR Target	lbs CO2 per sqft	PV kW	Total EDR	Total EDR Margin	% Comp.Margin	lbs CO2 per sqft	PV KW	On-Bill B/C Ratio	TDV B/C Ratio	Total EDR	Total EDR Margin	% Comp Margin	lbs CO2 per sqft	PV kW	On-Bill B/C Ratio	TDV B/C Ratio
1.	PG&E	46.8	36	1.5	3.3	15.4	31.4	40.2%	0.5	6.0	1,8	1.5	5.6	41.2	51.9%	0.3	6.76	1.4	1.4
2	PG&E	32.8	16	1.1	2.8	13.4	19.4	20.5%	0.5	4.9	1.8	1.4	2.7	30.1	31.5%	0.3	5.51	1.4	:1.4::
3	PG&E	33.1	14	1.0	2.7	14.6	18.5	20.6%	0.5	4.5	2,2	1.7	3.7	29.3	31.6%	0.2	5.10	1.5	1.6
4	PG&E	31.3	12	1.0	2.7	14.1	17.2	15.5%	0.5	4.5	2.1	1.6	2.8	28.6	26.5%	0.2	5.15	1.5	1.6
5	PG&E	32.5	16	1.0	2.6	14.3	18.2	19.7%	0.5	4.3	2.3	1.8	3.8	28.7	32.7%	0.2	4.84	1.6	1.6
5	PG&E/SoCalGas	32.5	16	1.0	2.6	14.3	18.2	19.7%	0.5	4.3	2,3	1.8	3.8	28.7	32.7%	0.2	4.84	1.6	1.6
6	SCE/SoCalGas	29.7	12	0.9	2.7	15.5	14.3	10.9%	0.6	4.1	1.2	1.5	3,6	26.1	18.9%	0.3	4.68	1.2	1.4
7	SDG&E	27.1	7	0.7	2.6	15.8	11.3	0.7%	0.6	3.7	1.9	1.5	2.9	24.2	6.7%	0.3	4.21	1.3	1.5
8	SCE/SoCalGas	26.1	10	0.8	2.9	15.1	10.9	8.9%	0.6	4.0	1.0	1.5	4.5	21.6	24.9%	0.3	4.54	1.1	1.4
9	SCE/SoCalGas	28.8	13	0.9	2:9	17.3	11.5	12.5%	0.7	4.1	1.1	-1.6	7.6	21.3	25.5%	0:4-	4.66	1.1	1.5
10	SCE/SoCalGas	28.8	11	0,9	3.0	17.7	11.1	14.0%	0.7	4.2	1.1	1.5	7.6	21.2	27.0%	0.4	4.78	1.1	1.5
10	SDG&E	28.8	11	0.9	3.0	17.7	11.1	14.0%	0.7	4.2	1.7	1.5	7,6	21.2	27.0%	0.4	4,78	1.4	1.5
11	PG&E	30.0	12	1,1	3.6	15.8	.14.2	16.2%	0.6	5.4	1.8	1.6	6.8	23.2	29.2%	0.4	5.11	1.5	1.6
12	PG&E	30.9	13	1.0	3.0	15.2	15.7	15.3%	0.5	5.0	1.7	1.4	5.6	25.4	29.3%	0.3	5.62	1.3	1.5
13	PG&E	30.7	13	1.1	3.8	17.3	13.4	17.4%	0.6	5.4	1.7	1.5	8.2	22.5	29.4%	0.4	6.14	1.4	1.5
14	SCE/SoCalGas	31.3	16	1.4	3.2	15.8	15.5	18.9%	0.9	4.8	1.2	1.6	7.4	23.9	30.9%	0.6	5.39	1.4	1.6
14	SDG&E	31.3	16	1.4	3.2	15.8	15.5	18.9%	0.9	4.8	1.8	1.6	7.4	23.9	30.9%	0.6	5.39	1.7	1.6
15	SCE/SoCalGas	26.2	8	1.3	5.4	20.0	6.2	16.8%	1.1	5.5	1.1	1.6	12.7	13.5	27.0%	0.8	6.25	1.2	1.5
16	PG&E	46.5	39	1.7	2.7	19.6	27:0	25.2%	0.9	5.5	2,1	1.6	11.1	35,4	34.3%	0.6	6.17	1.7	1.5

[&]quot;>1" = indicates cases where there is both first cost savings and annual utility bill savings.



Appendix D - Single Family Measure Summary

Table 29: Single Family Mixed Fuel Efficiency - Non-Preempted Package Measure Summary

		كليسان ستنهاره برحسان براراه	والمنافق المنافع المراكز المراواة	miny mincu	rueramerency	A COMP	The manufacture of the second	reasure summa	i y meningan	ويربي والمرابعة والمستجيدة والمرابعة
CZ	Duct	Infiltratio	Wall	<u>Attic</u>	Roof	Glazing	<u>Slab</u>	DHW	<u>HVAC</u>	PV:
1	VLLDCS -	Code Min	Code Min	Code Min	Code Min	Code Min	R-10 slab insulation	Basic CHW credit (0.7)	0.35 W/cfm	1.0 PV scaling
2	VLLDCS	Code Min	Code Min	Code Min	Code Min	Code Min	R-10 slab insulation	Basic CHW credit (0.7)	0.35 W/cfm	1.0 PV scaling
3	VLLDCS	Code Min	Code Min	Code Min	Code Min	Code Min	R-10 slab insulation	Basic CHW credit (0,7)	0.35 W/cfm	1.0 PV scaling
4	VLLDCS*	Code Min.	Code Min	Code Min	Code Min	Code Min	R-10 slab insulation	Basic CHW credit (0.7)	0.35 W/cfm	1.0 PV scaling
5	VLLDCS	Code Min	Code Min	Code Min	Code Min	Code Min	R-10 slab insulation	Basic CHW credit (0.7)	0.35 W/cfm	1.0 PV scaling
6	VLLDCS	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Basic CHW credit (0.7)	0:35 W/cfm	1.0 PV scaling
7	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	1.0 PV scaling
8	<12 ft ducts in attic	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Basic CHW credit (0.7)	0.35 W/cfm	1.0 PV scaling
9	VLLDCS	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Basic CHW credit (0.7)	0.35 W/cfm	1.0 PV scaling
10	VLLDCS	Code Min.	Code Min.	Code Min	0.25 solar reflectance	Code Min	R-10 slab insulation	Basic CHW credit (0.7)	0.35 W/cfm	1.0 PV scaling
11	VLLDCS	Code Min	Code Min	R-38 + R-30 attic	0.25 solar reflectance	Code Min	R-10 slab insulation	Basic CHW credit (0.7)	0.35 W/cfm	1.0 PV scaling
12	VLLDCS	Code Min	Code Min	Code Min	0.25 solar reflectance	Code Min	R-10 slab insulation	Basic CHW credit (0.7)	0.35 W/cfm	1.0 PV scaling
13	VLLDCS	Code Min	Code Min	R-38 + R-30 attic	0.25 solar reflectance	Code Min	R-10 slab insulation	Basic CHW credit (0.7)	0.35 W/cfm	1.0 PV scaling
14	VILIDCS	3 ACH50	Code Min	Code Min	0.25 solar reflectance:	Code Min	R-10 slab insulation	Basic CHW credit (0.7)	0:35 W/cfm	1.0 PV scaling
15	VLLDCS	Code Min	Code Min	R-38 + R-30 attic	0.25 solar reflectance	Code Min	R-10 slab insulation	Basic CHW credit (0.7)	0.35 W/cfm	1.0 PV scaling
16	VLLDCS	Code Min	Code Min	Code Min	Code Min	0.24/0.50 windows	Code Min	Basic CHW credit (0.7)	0:35 W/cfm	1.0 PV scaling

VVLDCS - Verified Low Leakage Ducts in Conditioned Space

Table 30: Single Family Mixed Fuel Efficiency - Equipment, Preempted Package Measure Summary

<u>cz</u>	<u>Duct</u>	<u>Infiltratio</u>	indhara Tari 😁	Programme and the second	165 July 195 57	1.5	Slab	DHW	HVAC	<u>P</u> V
1	VLLDCS	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	95 EF, basic compact dist.	96 AFUE, 0.35W/cfm	1.0 PV scaling
2	LLAHU + 2% leakage	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	95 EF, basic compact dist.	96 AFUE, 0.35W/cfm	1.0 PV scaling
3	VILIDCS:	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	95 EF, basic compact dist.	96 AFUE, 0.35W/cfm	1.0 PV scaling
4	LLAHU + 2% leakage	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	95 EF, basic compact dist.	96 AFUE, 0.35W/cfm	1.0 PV scaling
5	LLAHU + 2% leakage	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	95 EF, basic compact dist.	96 AFUE, 0.35W/cfm	1.0 PV scaling
6	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	95 EF, basic compact dist.	92 AFUE, 0.35W/cfm	1.0 PV scaling
7	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	95 EF, basic compact dist.	92 AFUE, 0.35W/cfm	1.0 PV scaling
8	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	95 EF, basic compact dist.	92 AFUE, 0.35W/cfm	1.0 PV scaling
9.	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	95 EF, basic compact dist.	16 SEER, 92 AFUE, 0.35W/cfm	1.0 PV scaling
10	LLAHU + 2% leakage	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	95 EF, basic compact dist.	16 SEER, 92 AFUE, 0.35W/cfm	1.0 PV scaling
11	LLAHU + 2% leakage	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	95 EF, basic compact dist.	18 SEER, 96 AFUE, 0.35W/cfm	1.0 PV scaling
12	LLAHU + 2% leakage	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	95 EF, basic compact dist.	16 SEER, 92 AFUE, 0.35W/cfm	1.0 PV scaling
13	VLLDCS	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	95 EF, basic compact dist.	16 SEER, 92 AFUE, 0.35W/cfm	1.0 PV scaling
14.	VLLDCS:	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	95 EF, basic compact dist.	16 SEER, 92 AFUE, 0.35W/cfm	1.0 PV scaling
15	LLAHU + 2% leakage	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	95 EF, basic compact dist.	16 SEER, 92 AFUE, 0.35W/cfm	1.0 PV scaling
16	VLLDCS	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	95 EF, basic compact dist.	18 SEER, 96 AFUE, 0.35W/cfm	1.0 PV scaling

LLAHU - Low Leakage Air Handling Unit
VVLDCS - Verified Low Leakage Ducts in Conditioned Space

Table 31: Single Family Mixed Fuel Efficiency & PV/Battery Package Measure Summary

	A contract of the second secon	end men make	4 - 4 - 10	0	and the second section of the second section of the second section sec	and the first server arises to	Commencer with a last course of	0	THE WAY AND A PROPERTY OF THE PARTY.	to a table to the first a special as the property of the special state of the special of the special of
CZ	Duct	Infiltration	Wall :	Attic	Roof	Glazing	Slab	DHW	HVAC	PV
11	VLLDCS	Code Min	Code Min	Code Min	Code Min	Code Min	R-10 slab insulation	Basic CHW credit (0.7)	0.35 W/cfm	1.0 PV scaling +5kWh batt
2	VÍLDCS VILIDES	Code Min	Code Min	Code Min	Code Min	Code Min	R-10 slab insulation	Basic CHW credit (0.7)	0.35 W/cfm	1.0 PV scaling + 5kWh batt
3	VLLDCS	Code Min	Code Min -	Code Min	Code Min	Code Min	R-10 slab insulation	Basic CHW credit (0.7)	0.35 W/cfm	1.0 PV scaling +5kWh batt
4	VILIDCS/#/###############################	Code Min	Code Min	Code Min	Code Min	Code Min	R-10 slab insulation	Basic CHW credit (0.7)	0.35 W/cfm	1.0 PV scaling + 5kWh batt
5	VLLDCS' : OF COMM	Code Min	Code Min	Code Min	Code Min	Code Min	R-10 slab insulation	Basic CHW credit (0.7)	0.35 W/cfm	1.0'PV scaling + 5kWh batt
б	VLLDCS 1 1 1 1 1 A 1 1 1 1	Code Min-	Code Min	Code Min 🚧 🚈	Code Min	Code Min	Code Min	Basic CHW credit (0.7)	0.35 W/cfm	1.0 PV scaling +5kWh batt
7	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Basic CHW credit (0.7)	Code Min	1.0 PV scaling +5kWh batt
8 -	<12 ft ducts in attic	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Basic CHW credit (0.7)	0.35 W/cfm	1.0 PV scaling +5kWh batt
9:	VILDCS	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Basic CHW credit (0.7)	0.35 W/cfm	1.0 PV scaling +5kWh batt
10	VILIDCS	Code Min	Code Min	Code Min	0.25 solar reflectance	Code Min	R-10 slab insulation	Basic CHW credit (0.7)	0:35 W/cfm	1.0 PV scaling +5kWh batt
11	VLLDCS	Code Min	Code Min	R-38 + R-30 attic	0.25 solar reflectance	Code Min	R-10 slab insulation	Basic CHW credit (0.7)	0.35 W/cfm	1.0 PV scaling + 5kWh batt
12	VLLDCS.	Code Min	Code Min	Code Min	0.25 solar reflectance	Code Min	R-10'slab insulation	Basic CHW credit (0.7)	0.35 W/cfm	1.0 PV scaling + 5kWh batt
13	VLLDCS TO THE PARTY	Code Min	Code Min	R-38 + R-30 attic	0.25 solar reflectance	Code Min	R-10 slab insulation	Basic CHW credit (0.7)	0.35 W/cfm	1.0 PV scaling +5kWh batt
14	VLLDCS	3 ACH50	Code Min 🖽	Code Min	0.25 solar reflectance	Code Min	R-10 slab insulation	Basic CHW credit (0.7)	0.35 W/cfm	1.0 PV scaling + 5kWh batt
15	VLLDCS	Code Min	Code Min	R-38 + R-30 attic	0.25 solar reflectance	Code Min	R-10 slab insulation	Basic CHW credit (0,7)	0.35 W/cfm	1.0 PV scaling + 5kWh batt
16	VLLDCS_	Code Min	Code Min	Code Min	Code Min	0.24/0.50 windows	Code Min	Basic CHW credit (0.7)	0.35 W/cfm	1.0 PV scaling + 5kWh batt
4		1 4 (2)				******* ***** *****.**				

Table 32: Single Family All-Electric Efficiency - Non-Preempted Package Measure Summary

CZ	<u>Duct</u>	Infiltratio	Wall	Attic	Roof	Glazing	Slab	DHW	<u>HVAC</u>	PV
1	VLLDCS	Code Min	Code Min	R-38 + R-30 attic	Code Min	0.24/0.50 windows	R-10 slab insulation	Code Min	0,45 W/cfm	Std Design PV
2	VLLDCS	Code Min	Code Min	Code Min	Code Min	0.24/0.23 windows	R-10 slab insulation	Code Min	0.45 W/cfm	Std Design PV
3	VLLDCS	Code Min	Code Min	Code Min	Code Min	Code Min	R-10 slab insulation	Code Min	0.45 W/cfm	Std Design PV
4	VLLDCS	Code Min	Code Min	Code Min	Code Min	Code Min	R-10 slab insulation	Code Min	0.45 W/cfm	Std Design PV
5	VILDCS	Code Min	Code Min	Code Min	Code Min	Code Min	R-10 slab insulation	Code Min	0.45 W/cfm	Std Design PV
6	VLLDCS	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	0.45 W/cfm	Std Design PV
7	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Std Design PV
8	VLLDCS -	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	0.45 W/cfm	Std Design PV
9	VLLDCS	Code Min	Code Min	Code Min	0.25 solar reflectance	Code Min	Code Min	Code Min	0.45 W/cfm	Std Design PV
10	VLLDCS	Code Min	Code Min	Code Min	0.25 solar reflectance	Code Min	R-10 slab insulation	Code Min	0.45 W/cfm	Std Design PV
11	VLLDCS -	Code Min	Code Min	R-38 + R-30 attic	0.25 solar reflectance	Code Min	R-10 slab insulation	Code Min	0.45 W/cfm	Std Design PV
12	VLLDCS	Code Min	Code Min	R-38 + R-30 attic	0.25 solar reflectance	Code Min	R-10 slab insulation	Code Min	0.45 W/cfm	Std Design PV
13	VILDCS -	3 ACH50	Code Min	R-38 + R-30 attic	0.25 solar reflectance	Code Min	R-10 slab insulation	Code Min	0.45 W/cfm	Std Design PV
14	VLLDCS'	3 ACH50	Code Min	R-38 + R-30 attic	0.25 solar reflectance	Code Min	R-10 slab insulation	Code Min	0.45 W/cfm	Std Design PV
15	VLLDCS	Code Min	0.043 Wall	R-38 + R-30 attic	0.25 solar reflectance	Code Min	R-10 slab insulation	Code Min	0.45 W/cfm	Std Design PV
16	VLLDCS	3 ACH50	Code Min	R-38 + R-30 attic	Code Min	0.24/0.50 windows	Code Min	Code Min	0.45 W/cfm	Std Design PV



Table 33: Single Family All-Electric Efficiency - Equipment, Preempted Package Measure Summary

<u>CZ</u>	a minger beim min de gebe bereine bemeine bereit fir bereit betreit betreit ge	<u>Infiltratio</u>	والمناورة والمناورية والمحاطية والمناورة	the state of the state of the	أسا كسيسون ويسايعون مستحددوه والأ	وي سنزد من المستدانية واسارها في	the same and same and	DHW	HVAC	PV
1	LLAHU + 2% leakage	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min.	NEEA Tier 3 HPWH	18 SEER, 10 HSPF, 0:45W/cfm	Std Design PV
2	LLAHU + 2% leakage	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	NEEA Tier 3 HPWH	18 SEER, 10 HSPF, 0.45W/cfm	Std Design PV
3	LLAHÜ + 2% leakage	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	NEEA Tier 3 HPWH	18 SEER, 10 HSPF, 0.45W/cfm	Std Design PV
4	LLAHU + 2% leakage	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min-	NEEA Tier 3 HPWH	18 SEER, 10 HSPF, 0.45W/cfm	Std Design/PV
5	LLAHU ± 2% leakage	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	NEEA Tier 3 HPWH	18 SEER, 10 HSPF, 0.45W/cfm	Std Design PV
б	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	NEEA:Tier 3 HPWH	16 SEER, 9 HSPF, 0.45W/cfm	Std Design PV
7	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	NEEA Tier 3 HPWH	16 SEER, 9 HSPF, 0.45W/cfm	Std Design PV
8	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	NEEA Tier 3 HPWH	0.45 W/cfm	Std Design PV
9	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	NEEA Tier 3 HPWH	16 SEER, 9 HSPF, 0.45W/cfm	Std Design PV
10	LLAHU ± 2% leakage	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	NEEA Tier 3 HPWH	16 SEER, 9 HSPF, 0.45W/cfm	Std Design PV
11	LLAHU +2% leakage	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	NEEA Tier 3 HPWH	18 SEER, 10 HSPF, 0.45W/cfm	Std Design PV
12	LLAHU ± 2% leakage	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	NEEA Tier 3 HPWH	18 SEER/10 HSPF, 0.45W/cfm	Std Design PV
13	LLAHU ± 2% leakage	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	NEEA Tier 3 HPWH	18 SEER, 10 HSPF, 0.45W/cfm	Std Design PV
14	LLAHU + 2% leakage	Code Min	Code Min	Code Min	Code Min-	Code Min	Code Min-	NEEA Tier 3 HPWH	18 SEER, 10 HSPF, 0.45W/cfm	Std Design PV
15	LLAHU + 2% leakage	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	NEEA Tier 3 HPWH	18 SEER, 10 HSPF, 0.45W/cfm	Std Design PV
16	LLAHU ± 2% leakage	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	NEEA Tier 3 HPWH	18 SEER, 10 HSPF, 0.45W/cfm	Std Design PV

LLAHU - Low Leakage Air Handling Unit :
VVLDCS - Verified Low Leakage Ducts in Conditioned Space

Table 34: Single Family All-Electric Efficiency & PV Package Measure Summary

<u>CZ</u>	Duct	Infiltratio	<u>Wall</u>	Attic	Roof	Glazing	<u>Slab</u>	DHW	HVAC	PV
1	VLLDCS	Code Min	Code Min	R-38 + R-30 attic	Code Min	0.24/0.50 windows	R-10 slab insulation	Code Min	0.45 W/cfm	0.9 PV scaling
2	VLLDCS:	Code Min	Code Min	Code Min	Code Min	0.24/0.23 windows	R-10 slab insulation	Code Min	0.45 W/cfm	0.9 PV scaling
3	VLLDCS	Code Min	Code Min	Code Min	Code Min	Code Min	R-10 slab insulation	Code Min	0.45 W/cfm	0.9 PV scaling
4	VLLDCS	Code Min	Code Min	Code Min	Code Min	Code Min	R-10 slab insulation	Code Min	0.45 W/cfm	0.9 PV scaling
5	VLLDCS	Code Min	Code Min	Code Min	Code Min	Code Min	R-10 slab insulation	Code Min	0.45 W/cfm	0.9 PV scaling
6	VLLDCS	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	0.45 W/cfm	0.9 PV scaling
7.	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	0.45 W/cfm	0.9 PV scaling
8	VLLDCS	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	0.45 W/cfm	0.9 PV scaling
9	VLLDCS	Code Min	Code Min	Code Min	0.25 solar reflectance	Code Min	Code Min	Code Min	0.45 W/cfm	0.9 PV scaling
10	VLLDCS	Code Min	Code Min	Code Min	0.25 solar reflectance	Code Min	R-10 slab insulation	Code Min	0.45 W/cfm	0.9 PV scaling
11	VLLDCS.	Code Min	Code Min	R-38 + R-30 attic	0.25 solar reflectance	Code Min	R-10 slab insulation	Code Min	0.45 W/cfm	0.9 PV scaling
12	VLLDCS	Code Min	Code Min	R-38 + R-30 attic	0.25 solar reflectance	Code Min	R-10 slab insulation	Code Min	0.45 W/cfm	0.9 PV scaling
13	VLLDCS	3 ACH50	Code Min	R-38 + R-30 attic	0.25 solar reflectance	Code Min	R-10 slab insulation	Code Min	0.45 W/cfm	0.9 PV scaling
14	VLLDCS	3 ACH50	Code Min	R-38 + R-30 attic	0.25 solar reflectance	Code Min	R-10 slab insulation	Code Min	0.45 W/cfm	0.9 PV scaling
1.5	VLLDCS	Code Min	0.043 wall	R-38 + R-30 attic	0.25 solar reflectance	Code Min	R-10 slab insulation	Code Min	0.45 W/cfm	0.9 PV scaling
16	VLLDCS	3 ACH50	Code Min	R-38 + R-30 attic	Code Min	0.24/0.50 windows	Code Min	Code Min	0.45 W/cfm	0.9 PV scaling



Table 35: Single Family All-Electric Efficiency & PV/Battery Package Measure Summary

	سراصور أصوحهم سيام	gan of feel a major major	والمستوال والمتحالية والمستوالية والمستوال	بالمنافرة والمنافرة	وسنبرأ فينهب وسيسون بالمراث والمراث	فالمحارث فيتستنب والمتارك والمارك والمارك والمارك				وتدريب كالمتحدث والمتحدد المتحدد المتحددة والمتحددة والمتحدد وا
CZ:	Duct	Infiltration	wall the state of	Attic	<u>Roof</u>	Glazing	<u>Slab</u> *	DHW	HVAC	PV.
1	VLLDCS	Code Min	Code Min	R-38 + R-30 attic	Code Min	0.24/0.50 windows	R-10 slab insulation	Code Min	0.45 W/cfm	1.0 PV scaling +5kWh batt
2	VLLDCS:	Code Min	Code Min	Code Min	Code Min	0.24/0.23 windows	R-10 slab insulation	Code Min	0.45 W/cfm	1.0 PV scaling +5kWh batt
3	VLLDCS	Code Min	Code Min	Code Min	Code Min	Code Min	R-10 slab insulation	Code Min	0.45 W/cfm	1.0 PV scaling + 5kWh batt
4	VILDCS	Code Min	Code Min	Code Min	Code Min	Code Min	R-10 slab insulation	Code Min	0.45 W/cfm	1.0 PV scaling + 5kWh batt
5	VLLDCS	Code Min	Code Min	Code Min	Code Min	Code Min	R-10 slab insulation	Code Min	0.45 W/cfm	1.0 PV scaling + 5kWh batt
6	VILLDCS	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min 🤲	0.45 W/cfm	1:0 PV scaling + 5kWh batt
7	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	0.45 W/cfm	1.0 PV scaling + 5kWh batt
8	VLLDCS	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	0.45 W/cfm	1.0 PV scaling +5kWh batt
9	VILDCS	Code Min	Code Min	Code Min	0:25 solar reflectance	Code Min	Code Min	Code Min	0.45 W/cfm	1.0 PV scaling +5kWh batt
10	VILDCS :	Code Min	Code Min	Code Min	0.25 solar reflectance	Code Min	R-10 slab insulation	Code Min	0.45 W/cfm	1.0 PV scaling +5kWh batt
11	VILDCS	Code Min	Code Min	R-38 + R-30 attic	0.25 solar reflectance	Code Min	R-10 slab insulation	Code Min	0.45 W/cfm	1:0 PV scaling +5kWh batt
12	VLLDCS :	Code Min	Code Min	R-38 + R-30 attic	0.25 solar reflectance	Code Min	R-10 slab insulation	Code Min	0.45 W/cfm	1.0 PV scaling + 5kWh batt
13	VLLDCS:	3 ACH50	Code Min	R-38 + R-30 attic	0.25 solar reflectance	Code Min	R-10 slab insulation	Code Min	0.45 W/cfm	1.0 PV scaling +5kWh batt
14	VLLDCS	3 ACH50	Code Min	R-38 + R-30 attic	0.25 solar reflectance	Code Min	R-10 slab insulation	Code Min	0.45 W/cfm	1:0 PV scaling + 5kWh batt
15	VLLDCS	Code Min	0.043 wall (SF); 0.048 wall (MF)	R-38 + R-30 attic	0.25 solar reflectance	Code Min	R-10 slab insulation	Code Min	0.45 W/cfm	1:0 PV scaling +5kWh batt
16	VLLDCS	3 ACH50	Code Min	R-38+ R-30 attic	Code Min	0.24/0.50 windows	Code Min	Code Min	0.45 W/cfm	1.0 PV scaling + 5kWh batt
					31 37 11		······································			

Appendix E - Multifamily Detailed Results

Table 36: Multifamily Mixed Fuel Efficiency Package Cost-Effectiveness Results

			В/	ASECASE				Nor	n-Preemi	pted			- 111			Equipr	ment - Pi	eemp	ted		10
Climate Zone	Vality	Total EDR	Efficiency EDR	CALGreen Tier 1 EDR Target	lbs CO2 per sqft PV kW ner	ldin al E	Efficiency EDR	Efficiency EDR Margin	% Comp Margin	lbs CO2 per sqft	PV kW per Buildine	On-Bill B/C Ratio	TDV B/C Ratio	Total EDR	Efficiency EDR	Efficiency EDR Margin	% Comp Margin	lbs CO2 per sqft	PV kW per Building	On-Bill B/C Ratio	TDV B/C Ratio
01	PG&E	28.6	60,7	23	2.7 15	.9 25.1	57.3	3.4	19.3%	2.3	16.0	1.1	1.2	26.4	58.4	2.3	12.2%	2.5	15.9	1.3	1.4
02	∴PG&E	25.7	56.5	12	2.4 13	.9 24.2	54.7	1.8	9.9%	2.3	13.8	1.0	1,7	23.6	54.2	2.3	12.5%	2.2	13.9	1.1	1.5
03	PG&E	24.7	57.8	10	2.1 1	.5 24.0	57.2	0.6	4.7%	2.1	13.5	1.0	1.1	23.1	56.2	1.6	11.2%	1.9	13.4	1.1	1.2
04	PG&E	. 25.5	56.8	- 8	2.2 13	.6 24.3	55.5	1.3	7.7%	2.1	13.5	0.8	1.2	23.8	54.9	1.9	10.9%	2.0	13.5	1.1	1.7
05	PG&E	24.2	57.4	10	2.1 12	.6 23.7	56.9	0.5	4.4%	2.0	12.6	1.0	1.0	22.7	55.9	1.5	10.9%	1.9	12.6	1.2	1.3
05	PG&E/SoCalGas	24.2	57,4	10	2.1 12	.6 23.7	56.9	0.5	4,4%	2.0	12.6	0.8	1.0	22.7	55.9	1.5	10.9%	1.9	12.6	1.1	1.3
06	SCE/SoCalGas	26.8	63.2	10	2.2 13	.9 25.8	61.9	1.3	7.0%	2.1	13.8	0.6	1.5	25.5	61.9	1.3	7.4%	2.0	13.9	1.4	1.7
07	SDG&E	26.8	64.5	5	2.1 13	.2 26.1	63.6	0.9	5.3%	2.1	13.1	0.7	2.2	25.0	62.5	2.0	12.2%	2.0	13.2	1.1	4
08	SCE/SoCalGas	25.7	61.8	. 10	2.2 14	.6 24.6	60.3	1.5	7.4%	2.1	14.5	0.7	1.4	24.6	60.7	1.1	5.7%	2.0	14.6	1.4	1.7
09	SCE/SoCalGas	26.4	59.7	13	2.2 14	.7 25.0	57.9	1.8	8.2%	2.2	14.4	1.5	3.3	24,1	56.9	2.8	12.9%	2.1	14.4	1.7	2.9
10	SCE/SoCalGas	27.0	58.7	10	2.3 15	.1 25.7	57.0	1.7	7.7%	2.2	14.9	0.8	1.7	24.7	55.8	2.9	13.0%	2.1	14.8	2.0	3.3
10	SDG&E	27.0	58.7	10	2.3 15	.1 25.7	57.0	1.7	7.7%	2.2	14.9	1.1	1.7	24.7	55.8	2.9	13.0%	2.1	14.8	2.6	3.3
11	PG&E	24.5	54.5	11	2.4 16	.6 22.3	51.6	2.9	11.9%	2.2	16.3	0.7	1.2	22.2	51.3	3.2	13.2%	2.2	16.1	1.8	3.3
12	PG&E	25.9	55.3	12	2.3 14	9 24.3	53.4	1.9	8.8%	2.2	14.8	1.1	2.2	23.5	52.5	2.8	12.8%	2.1	14.7	1.2	2.2
13	PG&E	26.1	55.9	11	2.3 17	.5 23.7	52.8	3.1	12.1%	2.1	17.1	0.6	1.3	23.7	52.5	3.4	13.2%	2.1	16.9	2.0	3,8
14	SCE/SoCalGas	25.6	55.9	15	2.8 14	.6 23:1	52.8	3.1	12.8%	2.5	14.3	0.7	1.2	23.2	52.6	3.3	13.3%	2.5	14.2	2.0	3.0
14	SDG&E	25.6	55.9	15	2.8 14	.6 23.1	52.8	3.1	12.8%	2,5	14.3	0.9	1.2	23.2	52.6	3.3	13:3%	2.5	14.2	2.5	3.0
15	SCE/SoCalGas	25.0	59.2	11	2.5 21	.6 22.7	55.0	4.2	12.9%	2.4	20.4	1.4	2.3	22.6	54.8	4.4	13.5%	2.3	20.4	>1	>1
16	PG&E	29.4	57.3	22	3.5 13	4 26.6	54.9	2.4	11.3%	3.0	13.7	1.1	1.2	26.9	54.4	2.9	13.1%	3.1	13.2	1.8	2.1

[&]quot;>1" = indicates cases where there is both first cost savings and annual utility bill savings.



Table 37: Multifamily Mixed Fuel Efficiency & PV/Battery Package Cost-Effectiveness Results

423			BASE					Efficie	ncy & PV/E	are contract of the first parties		
CZ	Utility	Total EDR	CALGreen Tier 1 EDR Target	lbs CO2 per sqft	PV kW per Building	Total EDR	Total EDR Margin	% Comp Margin	lbs CO2 per sqft	PV kW per Building	On-Bill B/C Ratio	TDV B/C Ratio
01	- PG&E	28.6	23	2.7	15.9	17.1	11.5	29,3%	2.1	16.5	0.4	1.2
02	PG&E	25.7	12.	2.4	13.9	14.8	10.9	16.9%	2.1	14.2	0.2	1.6
03	PG&E	24.7	10	2.1	13.5	14.4	10.3	10.7%	1.9	13.9	0.1	1.4
04	FG&E	25.5		2.2	13.6	14.3	11.2	15.7%	1,9	13.9	0.2	1.6
05	PG&E	24.2	10 ::	2.1	12.6	14.3	9,9	9.4%	1.8	13.1	.0.2	1.4
05	PG&E/SoCalGas	24.2	10	2.1	12.6	14.3	9.9	9.4%	1.8	13.1	0.1	1.4
06	. SCE/SoCalGas	26.8	10	2.2	13.9	16.1	10.7	10.0%	1.8	14.2	0.6	1.4
07	SDG&E	26.8	5	2.1	13.2	15.8	11.0	7.3%	1.7	13:6	0.0	1.4
08	SCE/SoCalGas	25.7	10	2.2	14.6	15.8	9,9	13.4%	1.8	14.9	0.7	1.3
09	SCE/SoCalGas	26.4	13	2.2	14,7	16.7	9.7	15.2%	1.8	14.9	0.9	1.5
10	SCE/SoCalGas	27.0	10	2.3	15.1	16.6	10.4	13.7%	1,9	15.3	1.0	-1.6
10	SDG&E	27,0	10	2,3	15,1	16.6	10.4	13.7%	1.9	15.3	0.2	1.6
11	PG&E	24.5	-11	2,4	16.6	14.0	10.5	19.9%	2.0	-16.7	0.4	1.6
12	PG&E	25.9	12	2.3	14.9	15.6	10.3	17.8%	2.0	15.2	0.3	1.7
13	PG&E	26,1	11	2.3	17,5	15.4	10.7	20.1%	2.0	17,5	0.4	1.6
14	SCE/SoCalGas	25.6	15	2.8	14.6	16.0	9.6	20.8%	2.2	14.7	111	1.4
14	-SDG&E	25.6	15	2.8	14.6	16.0	- 9.6	20.8%	2.2	14.7	0,5	1.4
15	SCE/SoCalGas	25,0	11	2.5	21.6	16.2	8.8	18.9%	2.1	20.9	1.3	1.7
16	PG&E	29.4	22	3.5	13.4	19.5	9,9	19.3%	2.7	14.1	0.5	1.3

[&]quot;inf" = indicates cases where there is both first cost savings and annual utility bill savings.

Table 38: Multifamily All-Electric Efficiency Package Cost-Effectiveness Results

y 6500		10 100 M	B/	SECASI	шпа					lon-Pree								ment - F	reem	pted		
CZ	Utility	Total EDR	Efficiency EDR	CALGreen Tier 1 EDR Target	lbs CO2 per sqft	PV kW per Building	Total EDR	Efficiency EDR	Efficiency EDR Margín	% Comp Margin	lbs CO2 per	PV kW per Building	On-Bill B/C Ratio	TDV B/C Ratio	Total EDR	Efficiency EDR	Efficiency EDR Margin	% Comp Margin	lbs:CO2 per	PV kW per Building	On-Bill B/C Ratio	TDV B/C Ratio
01	PG&E	41.1	70.6	36	1.6	15.9	37.5	67.0	3.6	14.6%	1.5	15.9	1.6	1.4	37.1	67.3	3.3	18.4%	1.4	15.9	2.4	2.3
02	PG&E	34.3	63.4	16	1.4	13.9	32.4	61.5	1.9	9.1%	1.3	13.9	1.7	2.1	31.1	60.2	3.2	15.1%	1.3	13.9	1.6	1.6
03	PG&E	33.5	64.2	14	1.3	13.5	33.5	64.2	0.0	0.0%	1.3	13.5			30.4	61.5	2.7	19.5%	1.1	13.5	1.7	1.6
04	PG&E	32.0	61.4	12	1.3	13.6	30.5	60.0	1.4	8.0%	1.2	13.6	1.4	1.5	29.7	59.2	2.2	12.2%	1.2	13.6	1.2	1.1
05	PG&E	34.7	65.4	16	1.3	12.6	34.1	64.8	0.6	3.4%	1.3	12.6	1.1	0.9	30.6	61.8	3.6	23.5%	1.2	12.6	2.1	2.0
05	PG&E/SoCalGas	34.7	65.4	16	1.3	12.6	34.1	64.8	0.6	3.4%	1,3	12.6	1.1	0.9	30.6	61.8	3.6	23.5%	1.2	12.6	2.1	2.0
06	SCE/SoCalGas	31.9	65.9	12	1.3	13.9	30.9	64,9	1.0	5.9%	1.3	13.9	0.7	1.3	29.8	63.7	2.2	13.0%	1.2	13.9	1.6	1.9
07	SDG&E	31.7	66.6	7	1.2	13.2	31.1	66.0	0.6	4.6%	1.2	13.2	0.6	1.0	29.7	64.7	1.9	13.6%	1.1	13.2	1.6	1.7
08	SCE/SoCalGas	29.8	63.6	-,10	1.3	14.6	28,6	62.4	1.2	6.5%	1.2	14.6	0.9	1.7	27.9	61,7	1.9	10.3%	1.2	14.6	1.6	1.8
09	SCE/SoCalGas	30.4	61.9	13	1.3	14.7	28.7	60.3	1.6	8.1%	1.3	14.7	1.3	2.7	28.8	60,4	1.5	7.4%	1.2	14.7	1.6	1.6
10	SCE/SoCalGas	31.2	61.3	11	1.4	15.1	29.3	59.5	1.8	8.7%	1.3	15.1	1.2	2.0	29.3	59.5	1.8	8.6%	1.3	15.1	1.7	2.0
10	SDG&E	31.2	61.3	11	1.4	15.1	29.3	59.5	1.8	8.7%	1.3	15.1	1.5	2.0	29.3	59.5	1.8	8.6%	1.3	15.1	2.0	2.0
11	PG&E	31.9	60.6	12	1.4	16.6	28.5	57.1	3.5	13.1%	1.3	16.6	1.4	1.6	28.1	56.7	3.9	14.4%	1.3	16.6	2.0	2.3
12	PG&E	32.0	59.9	13	1.3	14.9	29.4	57.3	2.6	11.4%	1.2	14.9	0,9	1.1	29.0	57.0	2.9	13.0%	1.2	14.9	_1.6	1.6
13	PG&E	32.1	60.5	13	1.4	17.5	28.8	57.2	3.3	12.6%	1.2	17.5	1,3	1.6	28.3	56.7	3.8	14.3%	1.2	17.5	2.0	2.3
14	SCE/SoCalGas	32.5	61.6	16	1.7	14.6	28.9	57.9	3.7	13.8%	1.6	14.6	1.2	1.6	28.7	57.8	3.8	14.3%	1.6	14.6	1.6	2.2
14	SDG&E	32.5	61,6	16	1.7	14.6	28.9	57.9	3.7	13.8%	1.6	14.6	1.5	1.6	28.7	57.8	3.8	14.3%	1.6	14.6	2.0	2.2
15	SCE/SoCalGas	28.2	61.0	8	1.8	21.6	23.9	56.6	4.4	14.2%	1.6	21.6	1.5	2.3	21.9	54.6	6.4	20.6%	1.5	21.6	1.2	1.7
16	PG&E	40.2	66.6	39	1.9	13.4	36.2	62.5	4.1	15.0%	1.7	13.4	2.1	2.1	37.1	63.4	3.2	11.4%	1.7	13.4	1.6	1.7

[&]quot;>1" = indicates cases where there is both first cost savings and annual utility bill savings.



Table 39: Multifamily All-Electric Efficiency & PV-PV/Battery Package Cost-Effectiveness Results

77 -	7 744 (11,456) Japanyay		<u>viuitiia</u>				DILLER		55 F F 190 C C A	1.10	ccry r .	ucisus.	2036	487 1965	75	*** 6"*** - *	41 11 120	\$-1,5 X	0 21 tys
12.		20 (H.)	BASEC	.ASE		7.7		Effic	iency 8	& PV					Efficienc	ужиу	/Batte	<u>Y </u>	
Climate Zone	Utility	Total EDR	CALGreen Tier 1 EDR Target	lbs CO2 per sqft	PV kW per Building	Total EDR	Total EDR Wargm	% Comp Wargin	lbs CO2 per sqft	PV kW per Building	On-Bill B/C Ratio	TDV B/C Ratio	Total EDR	Total EDR Wargin	% Comp Margin	lbs CO2 per sqft	PV kW per Building	On-Bill B/C Ratio	TDV B/C Ratio
01	PG&E	41.1	36	1.6	15.9	18.6	22.5	14.6%	0.8	26.9	2.0	1.5	6.6	34.5	24.6%	0.4	30.3	1.3	1.4
02	PG&E	34.3	16	1.4	13.9	16.8	17.5	9.1%	0.7	21.9	2.4	1.8	3.4	30.9	16.1%	0.3	24.8	1.4	1.7
03	PG&E	33,5	14	1.3	13.5	17.4	16.1	2.6%	0.7	20.8-	2.4	1.7	4.0	29.5	8.6%	0.3	23.6	1.3	1.6
04	PG&E	32.0	12	1.3	13.6	17.0	15.0	8.0%	0.7	20.2	2.4	1.8	3.1	28.9	16.0%	0.3	22.9	1.30	1.77
05	PG&E	34.7	16	1.3	12.6	17.6	17.1	3.4%	0.7	19.9	2.5	1.8	4.4	30.3	8.4%	⊹ 0:3⊹	22.5	1.4	1,7
05	PG&E/SoCalGas	34.7	16	1.3	12.6	17.6	17,1	3.4%	0.7	19,9	2,5	1.8	4,4	30.3	8.4%	0.3	22.5	1.4	1.7
06	SCE/SoCalGas	31.9	12	1.3	13.9	18.1	13.8	5.9%	- 1.0	19.5	1.2	1.7	4.4	27.5	8.9%	0.5	22.1	1.2	1.6
07	SDG&E	31.7	7.4	1.2	13.2	18.9	12.8	4.6%	0.9	18.1	2.1	1.8	4.6	27.1	6.6%	0.5	20.5	1.2	1.6
08	SCE/SoCalGas	29.8	10	1.3	14.6	18.2	11.6	6.5%	1.0	19.4	1.3	1.8	5.6	24.2	12.5%	0.5	22.0	1.2	1.6
09	SCE/SoCalGas	30.4	13	1.3	14.7	19,1	11.3	8.1%	1.0	19.4	1.3	1.9	7.1	23.3	15.1%	0.6	22.0	1.3	1.7
10	SCE/SoCalGas	31.2	11	1.4	15.1	20.4	10.8	8.7%	1.1	19.9	1.3	1.8	7,9	23.3	14.7%	0.6	22.5	1.3	1.7
10	SDG&E	31.2	11	1.4	15.1	20.4	10.8	8.7%	1.1	19.9	2.1	1.8	7,9	23.3	14.7%	0.6	22:5	1.4	1.7
11	PG&E	31.9	12	1.4	16.6	18.5	13.4	13.1%	0.8	22.8	2.2	1.8	6.6	25.3	21.1%	0.4	25.8	1.4	1.8
12	PG&E	32.0	13	1.3	14.9	17.6	14.4	11.4%	0.7	21.7	2.1	1.6	5.4	26.6	20.4%	0.4	24.5	1.3	1.7
13	PG&E	32.1	13	1.4	17.5	19.9	12.2	12.6%	0.8	23.3	2.1	1.7	8.2 -	23:9	20.6%	0.4	26:4	1.4	1,7
14	SCE/SoCalGas	32.5	16	1.7	14.6	18.5	14.0-	13.8%	1.3	20.2	1.4	1.9	7.7	24.8	21.8%	0,8	22.8	1.4	1.8
14	SDG&E	32.5	16	1.7	14.6	18.5	14,0	13.8%	1.3	20.2	2.2	1,9	7.7	24.8	21.8%	0.8	22.8	1.7	1.8
15	SCE/SoCalGas	28.2	. 8	1.8	21.6	21.1	7.1	14.2%	1.5	23.6	1.4	2.1	11.3	16.9	20.2%	1.1	26.6	1.3	1.8
16	PG&E	40.2	39	1.9	13.4	20.6	19.6	15.0%	1.2	22.0	2.6	1.9	10.3	29.9	23.0%	0.8	24.8	1.6	1.7

[&]quot;>1" = indicates cases where there is both first cost savings and annual utility bill savings.



Appendix F - Multifamily Measure Summary

Table 40: Multifamily Mixed Fuel Efficiency - Non-Preempted Package Measure Summary

CZ	Duct	Infiltration	Wall	Attic	Roof	Glazing	<u>Slab</u>	DHW	HVAC	PV:
1	VLIDCS	Code Min	Code Min	Code Min	Code Min	0.24/0.50 windows	R-10 slab insulation	Basic CHW credit (0.7)	0.35 W/cfm	1.0 PV scaling
2	VLLDCS	Code Min	Code Min	Code Min	0.25 solar reflectance	Code Min	R-10 slab insulation	Basic CHW credit (0.7)	0.35 W/cfm	1.0 PV scaling
3	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	R-10 slab insulation	Basic CHW credit (0.7)	0.35 W/cfm	1.0 PV scaling
4	VLLDCS	Code Min	Code Min	Code Min	0.25 solar reflectance	Code Min	R-10 slab insulation	Basic CHW credit (0.7)	0.35 W/cfm	1.0 PV scaling
5	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	R-10 slab insulation	Basic CHW credit (0.7)	0.35 W/cfm	1.0 PV scaling
6	VLLDCS	Code Min	Code Min	Code Min	0.25 solar reflectance	Code Min	Code Min	Basic CHW credit (0.7)	0.35 W/cfm	1.0 PV scaling
7	Code Min	Code Min	Code Min	Code Min	0.25 solar reflectance	Code Min	Code Min	Basic CHW credit (0.7)	0.35 W/cfm	1.0 PV scaling
8	VLLDCS	Code Min	Code Min	Code Min	0.25 solar reflectance	Code Min	Code Min	Enh CHW credit (0.6)	0.35 W/cfm	1.0 PV scaling
9	VLLDCS	Code Min	Code Min	Code Min	0.25 solar reflectance	Code Min	Code Min	Basic CHW credit (0.7)	0.35 W/cfm	1.0 PV scaling
10	VLLDCS	Code Min	Code Min	Code Min	0.25 solar reflectance	Code Min	R-10 slab insulation	Basic CHW credit (0.7)	0.35 W/cfm	1.0 PV scaling
11	VLLDCS	Code Min	Code Min	Code Min	0.25 solar reflectance	0.24/0.23 windows	R-10 slab insulation	Basic CHW credit (0.7)	0.35 W/cfm	1.0 PV scaling
12	VILDCS	Code Min	Code Min	Code Min	0.25 solar reflectance	Code Min	R-10 slab insulation	Basic CHW credit (0.7)	0.35 W/cfm	1.0 PV scaling
13	VLLDCS ///	Code Min	Code Min	Code Min	0.25 solar reflectance	0.24/0.23 windows	R-10 slab insulation	Basic CHW credit (0.7)	0.35 W/cfm	1.0 PV scaling
14	VLLDCS	Code Min	Code Min	Code Min	0.25 solar reflectance	0.24/0.23 windows	R-10 slab insulation	Basic CHW credit (0.7)	0.35 W/cfm	1.0 PV scaling
15	VLLDCS	Code Min	Code Min	Code Min	0.25 solar reflectance	0.24/0.23 windows	R-10 slab insulation	Basic CHW credit (0.7)	0.35 W/cfm	1.0 PV scaling
16	VLLDCS	Code Min	Code Min	Code Min	Code Min	0.24/0.50 windows	R-10 slab insulation	Basic CHW credit (0.7)	0.35 W/cfm	1.0 PV scaling



Table 41: Multifamily Mixed Fuel Efficiency – Equipment, Preempted Package Measure Summary

<u>cz</u>	Duct	Infiltratio	Wall	Attic	Roof	Glazing	Slab = ==	DHW	HVAC	<u>PV</u>
1:	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	95 EF, basic compact dist.	16 SEER, 92 AFUE, 0.35W/cfm	1.0 PV scaling
2	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	95 EF; basic compact dist.	16 SEER, 92 AFUE, 0.35W/cfm	1.0 PV scaling
3	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	95 EF, basic compact dist.	92 AFUE, 0.35W/cfm	1.0 PV scaling
4	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	95 EF, basic compact dist.	16 SEER, 0.35 W/cfm	1.0 PV scaling
5	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	95 EF, basic compact dist.	92 AFUE, 0:45W/cfm	1.0 PV scaling
6	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	95 EF, basic compact dist.	Code Min	1.0 PV scaling
7	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	95 EF, basic compact dist.	16 SEER, 0.35 W/cfm	1.0 PV scaling
8	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	95 EF; basic compact dist.	Code Min	1.0 PV scaling
9	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	95 EF, basic compact dist.	16 SEER, 0.35 W/cfm	1.0 PV scaling
10	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	95 EF, basic compact dist.	16 SEER; 0.35 W/cfm	1.0 PV scaling
11	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	95 EF, basic compact dist.	16 SEER, 92 AFUE, 0.35W/cfm	1.0 PV scaling
12	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	95 EF, basic compact dist.	16 SEER, 92 AFUE, 0.35W/cfm	1.0 PV scaling
13	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	95 EF, basic compact dist.	16 SEER, 92 AFUE, 0.35W/cfm	1.0 PV scaling
14	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	95 EF; basic compact dist.	16 SEER, 92 AFUE, 0.35W/cfm	1.0 PV scaling
15	Code Min	Code Min	Code Min	Code Min	Code Mîn	Code Min	Code Min	95 EF, basic compact dist.	16 SEER, 0.35 W/cfm	1.0 PV scaling
16	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	95 EF; basic compact dist.	16 SEER, 92 AFUE, 0.35W/cfm	1.0 PV scaling



Table 42: Multifamily Mixed Fuel Efficiency & PV/Battery Package Measure Summary

CZ	Duct	<u>Infiltration</u>	1 575 POST 1 15 Y	table agence on a price in a	Roof	Glazing	Slab	DHW	<u>HVAC</u>	PV
1	VLLDCS:	Code Min	Code Min	Code Min	Code Min	0.24/0.50 windows	R-10 slab insulation	Basic CHW credit (0.7)	0.35 W/cfm	1.0 PV scaling + 22kWh batt
2	VLLDCS	Code Min	Code Min	Code Min	0.25 solar reflectance	Code Min	R-10 slab insulation	Basic CHW credit (0.7)	0.35 W/cfm	1.0 PV scaling + 22kWh batt
3	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	R-10 slab insulation	Basic CHW credit (0.7)	0.35 W/cfm	1.0 PV scaling + 22kWh batt
4	VLLDCS ·	Code Min	Code Min	Code Min	0.25 solar reflectance	Code Min	R-10 slab insulation	Basic CHW credit (0.7)	0.35 W/cfm	1:0 PV scaling + 22kWh batt
5	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	R-10 slab insulation	Basic CHW credit (0.7)	0.35 W/cfm	1.0 PV scaling + 22kWh batt
6	VILDCS	Code Min	Code Min	Code Min	0.25 solar reflectance	Code Min	Code Min	Basic CHW credit (0.7)	0.35 W/cfm	1.0 PV scaling + 22kWh batt
7	Code Min	Code Min	Code Min	Code Min	0.25 solar reflectance	Code Min	Code Min	Basic CHW credit (0.7)	0.35 W/cfm	1.0 PV scaling + 22kWh batt
8	VLLDCS	Code Min	Code Min	Code Min	0.25 solar reflectance	Code Min	Code Min	Enh:CHW credit (0.6)	0.35 W/cfm	1.0 PV scaling + 22kWh batt
9	VLLDCS	Code Min	Code Min	Code Min	0.25 solar reflectance	Code Min	Code Min	Basic CHW credit (0.7)	0.35 W/cfm:	1.0 PV scaling + 22kWh batt
10	VLLDCS	Code Min	Code Min	Code Min	0.25 solar reflectance	Code'Min	R-10 slab insulation	Basic CHW credit (0.7)	0.35 W/cfm	1.0 PV scaling + 22kWh batt
11	VILDES	Code Min	Code Min	Code Min	0.25 solar reflectance	0.24/0.23 windows	R-10 slab insulation	Basic CHW credit (0.7)	0.35 W/cfm	1.0 PV scaling + 22kWh batt
12	VLLDCS	Code Min	Code Min	Code Min	0.25 solar reflectance	Code Min	R-10 slab insulation	Basic CHW credit (0.7)	0.35 W/cfm	1.0 PV scaling + 22kWh batt
13	VLLDCS	Code Min	Code Min	Code Min	0.25 solar reflectance	0.24/0.23 windows	R-10 slab insulation	Basic CHW credit (0.7)	0.35 W/cfm	1.0 PV scaling + 22kWh batt
14	VILDCS	Code Min	Code Min	Code Min	0.25 solar reflectance	0.24/0.23 windows	R-10 slab insulation	Basic CHW credit (0.7)	0.35 W/cfm	1.0 PV scaling + 22kWh batt
15	VLLDCS	Code Min	Code Min	Code Min	0.25 solar reflectance	0.24/0.23 windows	R-10 slab insulation	Basic CHW credit (0.7)	0.35 W/cfm	1.0 PV scaling + 22kWh batt
16	VLLDCS	Code Min	Code Min	Code Min	Code Min	0.24/0.50 windows	R-10 slab insulation	Basic CHW credit (0.7)	0.35 W/cfm	1.0 PV scaling + 22kWh batt



Table 43: Multifamily All-Electric Efficiency - Non-Preempted Package Measure Summary

CZ.	Duct	Infiltration	wall	Attic:	Roof	Glazing	Slab	DHW	HVAC	<u>PV</u>
1	VLLDCS	Code Min	Code Min	Code Min	Code Min	0.24/0.50 windows	R-10 slab insulation	Code Min	0.45 W/cfm	Std Design PV
2	VLLDCS	Code Min	Code Min	Code Min	0.25 solar reflectance	Code Min	R-10 slab insulation	Code Min	0.45 W/cfm	Std Design PV
3	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Std Design PV
4	VLLDCS	Code Min	Code Min	Code Min	0.25 solar reflectance	Code Min	R-10 slab insulation	Code Min	0.45 W/cfm	Std Design PV
5	VLLDCS	Code Min	Code Min	Code Min	Code Min	Code Min	R-10 slab insulation	Code Min	Code Min	Std Design PV
6	VLLDCS	Code Min	Code Min	Code Min	0.25 solar reflectance	Code Min	Code Min	Code Min	0.45 W/cfm	Std Design PV
7	Code Min	Code Min	Code Min	Code Min	0.25 solar reflectance	Code Min	Code Min	Code Min	0.45 W/cfm	Std Design PV
8	VLLDCS	Code Min	Code Min	Code Min	0.25 solar reflectance	Code Min	Code Min	Code Min	0.45 W/cfm	Std Design PV
9	VLLDCS	Code Min	Code Min	Code Min	0.25 solar reflectance	Code Mîn	Code Min	Code Min	0.45 W/cfm	Std Design PV
10	VLLDCS	Code Min	Code Min	Code Min	0.25 solar reflectance	Code Min	R-10 slab insulation	Code Min	0.45 W/cfm	Std Design PV
11	VLLDCS	Code Min	Code Min	Code Min	0.25 solar reflectance	0.24/0.23 windows	R-10 slab insulation	Code Min	0.45 W/cfm -	Std Design PV
12	VLLDCS	Code Min	Code Min	Code Min	0.25 solar reflectance	0.24/0.23 windows	R-10 slab insulation	Code Min	0.45 W/cfm	Std Design PV
13	VLLDCS	Code Min	Code Min	Code Min-	0.25 solar reflectance.	0.24/0.23 windows	R-10 slab insulation	Code Min	0.45 W/cfm	Std Design PV
14	VLLDCS	Code Min	Code Min	Code Min	0.25 solar reflectance	0.24/0.23 windows	R-10 slab insulation	Code Min	0.45 W/cfm	Std Design PV
15	VLLDCS	Code Min	Code Min	Code Min	0.25 solar reflectance	0.24/0.23 windows	R-10 slab insulation	Code Min-	0.45 W/cfm	Std Design PV
16	VLLDCS	Code Min	Code Min	Code Min	Code Min	0.24/0.50 windows	R-10 slab insulation	Code Min	0.45 W/cfm	Std Design PV

Table 44: Multifamily All-Electric Efficiency – Equipment, Preempted Package Measure Summary

<u>cz</u>	<u>Duct</u>	<u>Infiltratio</u>	Wall	<u>Attic</u>	Roof	Glazing	<u>Slab</u>	DHW	HVAC	PV
1	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	NEEA Tier 3 HPWH	16 SEER, 9 HSPF, 0.45W/cfm	Std Design PV
2	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	NEEA Tier 3 HPWH	16 SEER, 9 HSPF, 0.45W/cfm	Std Design PV
3	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	NEEA Tier 3 HPWH	16 SEER, 9 HSPF, 0.45W/cfm	Std Design PV
4	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	NEEA Tier 3 HPWH	16 SEER, 9 HSPF, 0.45W/cfm	Std Design PV
5	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	NEEA Tier 3 HPWH	16 SEER, 9 HSPF, 0.45W/cfm	Std Design PV
б	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	NEEA Tier 3 HPWH	0.45 W/cfm	Std Design PV
7	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	NEEA Tier 3 HPWH	0.45 W/cfm	Std Design PV
8	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	NEEA TIET 3 HPWH	0.45 W/cfm	Std Design PV
9 .	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	NEEA Tier 3 HPWH	0.45 W/cfm	Std Design PV
10	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	NEEA Tier 3 HPWH	0.45 W/cfm	Std Design PV
11	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	NEEA Tier 3 HPWH	16 SEER, 9 HSPF, 0.45W/cfm	Std Design PV
12.	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	NEEA TIET 3 HPWH	16 SEER, 9 HSPF, 0.45W/cfm	Std Design PV
13	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	NEEA Tier 3 HPWH	16 SEER, 9 HSPF, 0.45W/cfm	Std Design PV
14	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	NEEA Tier 3 HPWH	16 SEER, 9 HSPF, 0.45W/cfm	Std Design PV
15	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	NEEA Tier 3 HPWH	18 SEER, 10 HSPF, 0.45W/cfm	Std Design PV
16	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	NEEA Tier 3'HPWH	16 SEER, 9 HSPF, 0.45W/cfm	Std Design PV



Table 45: Multifamily All-Electric Efficiency & PV Package Measure Summary

<u>cz</u>	<u>Duct</u>	Infiltration	Wall	<u>Attic</u>	Roof	Glazing	<u>Slab</u> .	DHW.	HVAC	<u>PV</u>
1	VLLDCS	Code Min	Code Min	Code Min	Code Min	0.24/0.50 windows	R-10 slab insulation	Code Min	0.45 W/cfm	0.9 PV scaling
2	VLLDCS	Code Min	Code Min	Code Min	0.25 solar reflectance	Code Min	R-10 slab insulation	Code Min	0.45 W/cfm	0.9 PV scaling
3:	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	R-10 slab insulation	Code Min	0.45 W/cfm	0.9 PV scaling
4	VLLDCS	Code Min	Code Min	Code Min	0.25 solar reflectance	Code Min	R-10 slab insulation	Code Min	0.45 W/cfm	0.9 PV scaling
5	VLLDCS	Code Min	Code Min	Code Min	Code Min	Code Min	R-10 slab insulation	Code Min	Code Min	0.9 PV scaling
6	VLLDCS :	Code Min	Code Min	Code Min	0.25 solar reflectance	Code Min	Code Min-	Code Min	0:45 W/cfm	0.9 PV scaling
7	Code Min	Code Min	Code Min	Code Min	0.25 solar reflectance	Code Min	Code Min	Code Min	0.45 W/cfm	0.9 PV scaling
8	VLLDCS	Code Min	Code Min-	Code Min	0.25 solar reflectance	Code Min	Code Min	Code Min	0.45 W/cfm	0.9 PV scaling
9	VLLDCS	Code Min	Code Min	Code Min	0.25 solar reflectance	Code Min	Code Min	Code Min	0.45 W/cfm	0.9 PV scaling
10	VLLDCS	Code Min	Code Min-	Code Min	0.25 solar reflectance	Code Min	R-10 slab insulation	Code Min	0.45 W/cfm	0.9 PV scaling
11	VLLDCS	Code Min	Code Min	Code Min	0.25 solar reflectance	0.24/0.23 windows	R-10 slab insulation	Code Min	0.45 W/cfm	0.9 PV scaling
12	VLLDCS	Code Min	Code Min	Code Min	0.25 solar reflectance	0.24/0.23 windows	R-10 slab insulation	Code Min	0.45 W/cfm-	0.9 PV scaling
13	VLLDCS	Code Min	Code Min	Code Min	0.25 solar reflectance	0.24/0.23 windows	R-10 slab insulation	Code Min	0.45 W/cfm	0.9 PV scaling
14	VLLDCS	Code Min	Code Min	Code Min	0.25 solar reflectance	0.24/0.23 windows	R-10 slab insulation	Code Min	0.45 W/cfm	0.9 PV scaling
15	VLLDCS	Code Min	Code Min	Code Min	0.25 solar reflectance	0.24/0.23 windows	R-10 slab insulation	Code Min	0.45 W/cfm	0.9 PV scaling
16	VLLDCS	Code Min	Code Min	Code Min	Code Min	0.24/0.50 windows	R-10 slab insulation	Code Min	0.45 W/cfm	0.9 PV scaling

Table 46: Multifamily All-Electric Efficiency & PV/Battery Package Measure Summary

		ran	IC TO. II.	i mi manin	uy mu meemie n	micically be i v	/ Dallery Lacine	tiery rackage measure building				
<u>cz</u>	Duct	Infiltration	Wall	Attic	<u>Roof</u>	Glazing	<u>Slab</u>	DHW	HVAC	PV		
1	VLLDCS	Code Min	Code Min	Code Min	Code Min	0.24/0.50 windows	R-10 slab insulation	Code Min	0.45 W/cfm	1.0 PV scaling + 22kWh batt		
12	VLLDCS	Code Min	Code Min	Code Min	0.25 solar reflectance	Code Min	R-10 slab insulation	Code Min	0.45 W/cfm	1.0 PV scaling + 22kWh batt		
3	Code Min	Code Min	Code Min	Code Min	Code Min	Code Min	R-10 slab insulation	Code Min	0.45 W/cfm	1.0 PV scaling + 22kWh batt		
4	VLLDCS	Code Min	Code Min	Code Min	0.25 solar reflectance	Code Min	R-10 slab insulation	Code Min	0.45 W/cfm	1.0 PV scaling + 22kWh batt		
5	VLLDCS	Code Min	Code Min	Code Min	Code Min	Code Min	R-10 slab insulation	Code Min	Code Min	1.0 PV scaling + 22kWh batt		
б	VLLDCS	Code Min	Code Min	Code Min	0.25 solar reflectance	Code Mîn	Code Min	Code Min	0.45 W/cfm	1.0 PV scaling + 22kWh batt		
7	Code Min	Code Min	Code Min	Code Min	0.25 solar reflectance	Code Min	Code Min	Code Min	0.45 W/cfm	1.0 PV scaling + 22kWh batt		
8	VLLDCS	Code Min	Code Min	Code Min	0.25 solar reflectance	Code Min	Code Min	Code Min	0.45 W/cfm	1.0 PV scaling + 22kWh batt		
9 :	VLLDCS	Code Min	Code Min	Code Min	0.25 solar reflectance	Code Min	Code Min	Code Min	0.45 W/cfm	1.0 PV scaling + 22kWh batt		
10	VLLDCS	Code Min	Code Min	Code Min	0.25 solar reflectance	Code Min	R-10 slab insulation	Code Min	0.45 W/cfm	1.0 PV scaling + 22kWh batt		
11	VLLDCS	Code Min	Code Min	Code Min	0.25 solar reflectance	0.24/0.23 windows	R-10 slab insulation	Code Min	0.45 W/cfm	1.0 PV scaling + 22kWh batt		
12	VLLDCS	Code Min	Code Min	Code Min	0.25 solar reflectance	0.24/0.23 windows	R-10 slab insulation	Code Min	0.45 W/cfm	1.0 PV scaling + 22kWh batt		
13	VLLDCS	Code Min	Code Min	Code Min	0.25 solar reflectance	0.24/0.23 windows	R-10 slab insulation	Code Min	0.45 W/cfm	1.0 PV scaling + 22kWh batt		
14	VILLDCS	Code Min	Code Min	Code Min	0.25 solar reflectance	0.24/0.23 windows	R-10 slab insulation	Code Min	0.45 W/cfm	1.0 PV scaling + 22kWh batt		
15	VLLDCS	Code Min	Code Min	Code Min	0.25 solar reflectance	0.24/0.23 windows	R-10 slab insulation	Code Min	0.45 W/cfm	1.0 PV scaling + 22kWh batt		
16	VLLDCS	Code Min	Code Min	Code Min	Code Min	0.24/0.50 windows	R-10 slab insulation	Code Min	0.45 W/cfm	1.0 PV scaling + 22kWh batt		



Appendix G – Results by Climate Zone

Climate Zone 1	80
Climate Zone 2	82
Climate Zone 3 เลเองเหมือนเกษอย์การเลยเกมเกษาสามารถและเกษาเกษาเกษาเกษาเกษาเกษาเกษาเกษาเกษาเกษา	84
Climate Zone 4	86
Climate Zone 5 PG&E	88
Climate Zone 5 PG&E/SoCalGas	90
Climate Zone 6 เมษายน เมษายน และ เล่าเล่าเล่าเล่าเล่าเล่าเล่าเล่าเล่าเล่า	92
Climate Zone 7 การกระบานเกลยและการเกลย์นั้นและพระบุร์สุดและและสมเดอกเลยและเกลย์นเกลย์นเกลย์นเกลย์นเกลย์	94
Climate Zone 8	96
Climate Zone 9	98
Climate Zone 10 SCE/SoCalGas	
Climate Zone 10 SDGE	102
Climate Zone 11	104
Climate Zone 12	106
Climate Zone 13	108
Climate Zone 14 SCE/SoCalGas	110
Climate Zone 14 SDGE	112
Climate Zone 15	114
Climate Zone 16	



Climate Zone 1

Table 47: Single Family Climate Zone 1 Results Summary

Clim PG&	ate Zone 1 .F	Annual	Annual therms	EDR Margin ⁴	PV Size Change (kW) ⁵	CO2-Equivalent Emissions (lbs/sf)		NPV of Lifetime	Benefit to Cost Ratio (B/C)	
arika aberahan	le Family	Net kWh				Total	Reduction	Incremental Cost (\$)	On-Bill	TDV
=	Code Compliant	(O)	581	n/a	n/a	3.00	n/a	n/a	n/a	n/a
Fue!1	Efficiency-Non-Preempted	(0)	480	5.0	(0.08)	2.51	0.49	\$1,355	3.38	2.82
Mixed	Efficiency-Equipment	0	440	6.5	(0.07)	2.32	0.68	\$1,280	4.92	4.10
Ē	Efficiency & PV/Battery	(28)	480	10.5	0.04	2.40	0.60	\$5,311	0.87	1.61
7	Code Compliant	7,079	0	n/a	n/a	- 1.51	n/a	n/a	n/a	n/a
LLic	Efficiency-Non-Preempted	4,461	0	15.0	0.00	1.01	0.50	\$7,642	1.79	1.66
Elect	Efficiency-Equipment	5,933	0	6.5	0.00	1.29	0.22	\$2,108	2.94	2.74
AII-E	Efficiency & PV	889	0	31.0	2.67	0.52	1.00	\$18,192	1.81	1.45
	Efficiency & PV/Battery	(14)	0	41.0	3.45	0.28	1.23	\$24,770	1.45	1.40
ي. 12 س	Code Compliant	7,079	0	0.0	0.00	. 1,51	1.49	(\$5,349)	0.37	0.91
Fuel f	Efficiency & PV	889	0	31.0	2.67	0.52	2.48	\$12,844	1.43	2,11
ixed F	Neutral Cost	5,270	0	8.0	1:35	1,26	1,74	\$0	0.00	1.09
Mix	Min Cost Effectiveness	3,106	.0	18.0	2.97	0.95	2.04	(\$6,372)	1.08	>1

All reductions and incremental costs relative to the mixed fuel code compliant home.



²All reductions and incremental costs relative to the all-electric code compliant home.

All reductions and incremental costs relative to the mixed fuel code compliant home except the EDR Margins are relative to the Standard Design for each case which is the all-electric code compliant home. Incremental costs for these packages reflect the cots used in the On-Bill cost effectiveness methodology. Costs differ for the TDV methodology due to differences in the site gas infrastructure costs (see Section 2.6).

This represents the Efficiency EDR Margin for the Efficiency-Non-Preempted and Efficiency-Equipment packages and Total EDR Margin for the Efficiency & PV, Efficiency & PV/Battery, Neutral Cost, and Min Cost Effectiveness packages. Positive values indicate an increase in PV capacity relative to the Standard Design.

Table 48: Multifamily Climate Zone 1 Results Summary (Per Dwelling Unit)

Clim PG&	ate Zone 1. ⊏	Annual			PV Size	secretary with the party to be a facility of the said	quivalent ons (lbs/sf)	NPV of Lifetime	[4] [2] [4] [4] [4] [4] [4] [4] [4] [4] [4] [4	to Cost (B/C)
经过程证明的统	family	Net kWh	Annual therms	EDR ≟Margin⁴	Change (kW)⁵	Total	Reduction	Incremental Cost (\$)	On-Bill	=-TDV
el 1	Code Compliant	(0)	180	n/a	n/a	2.75	n/a	n/a	n/a	n/a
H	Efficiency-Non-Preempted	(0)	147	3.0	0.00	2.31	0.44	\$960 ·	1.10	1.18
xed	-Efficiency-Equipment	(0)	159	2.0	(0.01)	2.48	0.27	\$507	1,29	1.41
N N	Efficiency & PV/Battery	(14)	147	11.5	0.07	2.13	0.61	\$3,094	0.35	1:21
	Code Compliant	2,624	O.	n/a	n/a	1.62	n/a	n/a	n/a	n/a
ctric ²	Efficiency-Non-Preempted	2,328	0	3,5	0.00	1.46	0,15	\$949	1,55	1.40
: Elect	Efficiency-Equipment	2,278	. 0.	3.0	0.00	1.41	0.20	\$795	2.39	2.26
AII-Ele	-Efficiency-& PV	499	0	22.5	1.37	0.75	0.86	\$5,538	2.04	1.50
	Efficiency & PV/Battery	(7)	0	34.5	1.80	0.38	1.24	\$8,919	1.33	1.43
ر د	Code Compliant	2,624	0	0.0	0.00	1.62	1.13	(\$2,337)	0.38	1.01
-uel t ctric	Efficiency & PV	62	0	22.5	1.37	0.75	2.00	\$3,202	1.63	>1
ced F	Neutral Cost	1,693	.0	9.5	0.70	1.25	1.50	\$0	0.00	1.57
	Min Cost Effectiveness	1,273	0	14.0	1.01	1.09	1.66	(\$1,052)	1.14	3.76

¹All reductions and incremental costs relative to the mixed fuel code compliant home.

⁵Positive values indicate an increase in PV capacity relative to the Standard Design.



²All reductions and incremental costs relative to the all-electric code compliant home.

³All reductions and incremental costs relative to the mixed fuel code compliant home except the EDR Margins are relative to the Standard Design for each case which is the all-electric code compliant home. Incremental costs for these packages reflect the cots used in the On-Bill cost effectiveness methodology. Costs differ for the TDV methodology due to differences in the site gas infrastructure costs (see Section 2.6).

⁴This represents the Efficiency EDR Margin for the Efficiency-Non-Preempted and Efficiency-Equipment packages and Total EDR Margin for the Efficiency & PV Efficiency & PV/Battery, Neutral Cost, and Min Cost Effectiveness packages.

Climate Zone 2

Table 49: Single Family Climate Zone 2 Results Summary

Quinter to the control of the contro	Climate Zone 2 CG&E		Appual	-DB	PV Size		quivalent ons (Ibs/sf)	NPV of Lifetime Incremental	The State of the S	to Cost (B/C)
Sing	ile Family	Net kWh	Annual therms	EDR Margin⁴	Change (kW)⁵	Total	Reduction	Cost (\$)	On-Bill	TDV
=	Code Compliant	(0)	421	n/a	n/a	2.23	n/a	n/a	n/a	n/a
Fuel	Efficiency-Non-Preempted	0	360	3.0	(0,04)	1.94	0.30	\$1,504	1.63	1.66
Mixed	Efficiency-Equipment	(0)	352	3.0	(0.03)	1.90	0.33	\$724	3.77	3.63
Ē	Efficiency & PV/Battery	(22)	360	10.0	0.06	1.82	0.41	\$5,393	0.47	1.56
	Code Compliant	5,014	0	n/a	n/a	1.11	n/a	n/a	n/a	n/a
ric²	Efficiency-Non-Preempted	4,079	0	4.5	0.00	0.94	0.18	\$3,943	1.21	1.07
AII-Electric	Efficiency-Equipment	4,122	. 0	5.0	0.00	0.94	0.17	\$2,108	2.25	2.10
	Efficiency & PV	847	0	19.0	2.07	0.49	0.63	\$12,106	1.83	1.38
	Efficiency & PV/Battery	(15)	0	30.0	2.71	0.26	0.86	\$18,132	1.37	1.43
el to	Code Compliant	5,014	0	0.0	0.00	1.11	1.12	(\$5,349)	0.52	1.59
Mixed Fuel to All-Electric ³	Efficiency & PV	847	0	19.0	2.07	0.49	1.75	\$6,758	1.76	39.70
Mixe	Neutral Cost	2,891	0	9.5	1.36	0.82	1.41	\$0	>1	>1

All reductions and incremental costs relative to the mixed fuel code compliant home.

⁵Positive values indicate an increase in PV capacity relative to the Standard Design.



²All reductions and incremental costs relative to the all-electric code compliant home,

³All reductions and incremental costs relative to the mixed fuel code compliant home except the EDR Margins are relative to the Standard Design for each case which is the all-electric code compliant home. Incremental costs for these packages reflect the cots used in the On-Bill cost effectiveness methodology. Costs differ for the TDV methodology due to differences in the site gas infrastructure costs (see Section 2.6).

⁴This represents the Efficiency EDR Margin for the Efficiency-Non-Preempted and Efficiency-Equipment packages and Total EDR Margin for the Efficiency & PV, Efficiency & PV/Battery, and Neutral Cost packages.

Table 50: Multifamily Climate Zone 2 Results Summary (Per Dwelling Unit)

Clim PG8	nate Zone 2 Œ	Annual	Annual therms	EDR Margin ⁴	PV Size Change (kW) ⁵	CO2-Equivalent Emissions (lbs/sf)		- NPV of Lifetime	TOTAL	to Cost (B/C)
Mult	ifamily	Net kWh				Total	Reduction	Incremental Cost (\$)	On-Bill	TDV
<u>-</u>	Code Compliant	(0)	150	n/a	n/a	2.37	n/a	n/a	n/a	n/a
4 2 4	Efficiency-Non-Preempted	. 0	142	1.5	(0.02)	2.25	0.12	\$309	0.97	1.75
Mixed	Efficiency-Equipment	(0)	134	2.0	(0.01)	2.15	0.22	\$497	1.08	1.49
8	Efficiency & PV/Battery	(11)	142	10.5	0.04	2.07	0.30	\$2,413	0.17	1.60
	Code Compliant	2,151	0	n/a	n/a	1.38	n/a	n/a	n/a	n/a
ric ²	Efficiency-Non-Preempted	2,038	:0	1.5	0.00	1.32	0.06	\$361	- 1:73	2.05
All-Electric	Efficiency-Equipment	1,928	.0	3.0	0.00	1.25	0.13	\$795	1.56	1.56
=	Efficiency & PV	476	0	17.5	1.00	0.72.	0.67	\$3,711 -	2.42	1.82
	Efficiency & PV/Battery	(7)	0	30.5	1.36	0,35`	1.04	\$6,833	1.38	1.74
el to	Code Compliant	2,151	0	0.0	0.00	1.38	0.99	(\$2,337)	0,53	1.42
ed Fuel -Electri	Efficiency & PV	60	0	17.5	- 1.00	0.72	1,65	\$1,375	3.31	>1
Mixe AII-I	Neutral Cost	1,063	Ö	10.5	0.70	0.96	1.41	\$0	>1	>1

¹All reductions and incremental costs relative to the mixed fuel code compliant home.



²All reductions and incremental costs relative to the all-electric code compliant home.

⁸All reductions and incremental costs relative to the mixed fuel code compliant home except the EDR Margins are relative to the Standard Design for each case which is the all-electric code compliant home. Incremental costs for these packages reflect the cots used in the On-Bill cost effectiveness methodology. Costs differ for the TDV methodology due to differences in the site gas infrastructure costs (see Section 2.6).

⁴This represents the Efficiency EDR Margin for the Efficiency-Non-Preempted and Efficiency-Equipment packages and Total EDR Margin for the Efficiency & PV/Battery, and Neutral Cost packages.

⁵Positive values indicate an increase in PV capacity relative to the Standard Design.

Climate Zone 3

Table 51: Single Family Climate Zone 3 Results Summary

	Climate Zone 3 PG&E		Annual	EDD	PV Size		quivalent ons (Ibs/sf)	NPV of Lifetime	Benefit Ratio	an Artific Consultations
Sing	jle Family	Net kWh	Annual therms	EDR Margin ⁴	Change (kW)⁵	Total	Reduction	Incremental Cost (\$)	On-Bill	TDV
7	Code Compliant	(0)	348	n/a	n/a	1.88	n/a	n/a	n/a	n/a
Fuel ¹	Efficiency-Non-Preempted	(0)	296	2.5	(0.03)	1.63	0.26	\$1,552	1.28	1.31
Mixed	Efficiency-Equipment	(0)	273	4.0	(0.03)	1.52	0.37	\$1,448	1.91	1.97
Ē	Efficiency & PV/Battery	(20)	296	10.0	0.07	1.50	0.38	\$5,438	0.38	1.38
	Code Compliant	4,355	.0.	n/a	n/a	1.00	n/a	n/a	n/a	n/a
AII-Electric ²	Efficiency-Non-Preempted	3,584	0	4.5	0.00	0.85	0.15	\$1,519	2.60	2.36
Sect	Efficiency-Equipment	3,670	0	4.0	0.00	0.86	0.14	\$2,108	1.76	1.62
∀	Efficiency & PV	790	.0	18.0	1.77	0.46	0.54	\$8,517	2.22	1.68
	Efficiency & PV/Battery	(12)	0	29.0	2.37	0.23	0.76	\$14,380	1.50	1.58
el to	Code Compliant	4,355	0	0.0	0.00	1.00	0.89	(\$5,349)	0.55	1,53
Mixed Fuel to All-Electric ³	Efficiency & PV	790	0	18.0	1.77	0.46	1.43	\$3,169	2.88	>1
Mixe	Neutral Cost	2,217	0	10.5	1.35	0.70	1.18	\$0	>1	>1

All reductions and incremental costs relative to the mixed fuel code compliant home.

⁵Positive values indicate an increase in PV capacity relative to the Standard Design.



²All reductions and incremental costs relative to the all-electric code compliant home.

³All reductions and incremental costs relative to the mixed fuel code compliant home except the EDR Margins are relative to the Standard Design for each case which is the all-electric code compliant home. Incremental costs for these packages reflect the cots used in the On-Bill cost effectiveness methodology. Costs differ for the TDV methodology due to differences in the site gas infrastructure costs (see Section 2.6).

⁴This represents the Efficiency EDR Margin for the Efficiency-Non-Preempted and Efficiency-Equipment packages and Total EDR Margin for the Efficiency & PV/Battery, and Neutral Cost packages.

Table 52: Multifamily Climate Zone 3 Results Summary (Per Dwelling Unit)

Clim PG&	ate Zone 3	Annual	Annual	FDD	PV Size Change (kW) ⁵		quivalent ons (lbs/sf)	NPV of Lifetime	Benefit Ratio	7. C. C. C. T. S. C.
Mult	ifamily	Net kWh	Annual therms	EDR Margin⁴		Total	Reduction	Incremental Cost (\$)	On-Bill	TDV
<u>6</u> 11	Code Compliant	(0)	133	n/a	n/a	2.13	n/a	n/a	n/a	n/a
_ ∄	Efficiency-Non-Preempted	(0):	127	0.5	(0.00)	2.06	0.07	\$175	1.00	1,11
Mixed	Efficiency-Equipment	-(0)	119	1.5	(0.00)	1.94	0.19	\$403	1,11	1,23
Ž	Efficiency & PV/Battery	(10)	127	10.0	0,05	1.86	0.27	\$2,279	0.11	1.41
	Code Compliant	1,944	0	n/a	n/a	1.27	n/a	n/a	n/a	n/a
ctric	Efficiency-Non-Preempted	1,944	0	0.0	0.00	1.27	0.00	\$ 0		10 .00.000 00°
-Eleci	Efficiency-Equipment	1,698	0:	2.5	0.00	1.13	0.14	\$795	1,73	1,58
AII-E	Efficiency & PV	457	0	16,0	0.92	0.69	0.58	\$3,272	2.43	1.73
	Efficiency & PV/Battery	(7)	0	29.5	1.26	0.33	0.94	\$6,344	1.32	1,64
Fuel to ectric ³	Code Compliant	1,944	0	0.0.	0.00	1.27	0.86	(\$2,337)	0.58	1.46
d Fu	Efficiency & PV	57	Ö	16.0	0.92	0,69	1.43	\$936	4.18	.>1
Mixed All-El	Neutral Cost	845	.0	11.5	0.70	0.85	1.28	\$0	>1	>1



¹All reductions and incremental costs relative to the mixed fuel code compliant home. ²All reductions and incremental costs relative to the all-electric code compliant home.

³All reductions and incremental costs relative to the mixed fuel code compliant home except the EDR Margins are relative to the Standard Design for each case which is the all-electric code compliant home. Incremental costs for these packages reflect the cots used in the On-Bill cost effectiveness methodology. Costs differ for the TDV methodology due to differences in the site gas infrastructure costs (see Section 2.6).

⁴This represents the Efficiency EDR Margin for the Efficiency-Non-Preempted and Efficiency-Equipment packages and Total EDR Margin for the Efficiency & PV, Efficiency & PV/Battery, and Neutral Cost packages.

⁵Positive values indicate an increase in PV capacity relative to the Standard Design.

Climate Zone 4

Table 53: Single Family Climate Zone 4 Results Summary

Clim PG&	ate Zone 4 E	Annual			PV Size		Equivalent ons (Ibs/sf)	NPV of Lifetime	 A STATE OF CONTRACTOR 	to Cost (B/C)
Sing	le Family	Net kWh	Annual therms	EDR Margin⁴	Change (kW)⁵	Total	Reduction	Incremental Cost (\$)	On-Bill	TDV
<u>-</u>	Code Compliant	0	347	n/a	n/a	1.88	n/a	n/a	n/a	n/a
E	Efficiency-Non-Preempted	0	306	2.5	(0.03)	1.68	0.20	\$1,556	0.93	1.15
Mixed	Efficiency-Equipment	(0)	294	2.5	(0.02)	1.62	0.26	\$758	2.39	2.67
B	Efficiency & PV/Battery	(18)	306	10.0	0.07	1,55	0.33	\$5,434	0.30	1.48
2	Code Compliant	4,342	0	n/a	n/a	1.00	n/a	n/a	n/a	n/a
	Efficiency-Non-Preempted	3,775	.0	3.0	0.00	0.89	0.11	\$1,519	1.92	1.84
AII-Electric	Efficiency-Equipment	3,747	0	3.5	0.00	0.88	0.12	\$2,108	1.52	1.52
7II-E	Efficiency & PV	814	0	17.0	1.84	0.48	0.52	\$8,786	2.13	1.62
	Efficiency & PV/Battery	(11)	0	28.5	2.44	0.25	0.75	\$14,664	1.46	1.61
el to	Code Compliant	4,342	Ö	0.0	0.00	1.00	0.88	(\$5,349)	0.55	1.59
Mixed Fuel to All-Electric 3	Efficiency & PV	814	0	17.0	1.84	0,48	1.40	\$3,438	2.64	>1
Mixe All-E	Neutral Cost	2,166	0	10.0	1.35	0.70	1.18	\$0	>1	>1

¹All reductions and incremental costs relative to the mixed fuel code compliant home.

⁵Positive values indicate an increase in PV capacity relative to the Standard Design.



²All reductions and incremental costs relative to the all-electric code compliant home.

³All reductions and incremental costs relative to the mixed fuel code compliant home except the EDR Margins are relative to the Standard Design for each case which is the all-electric code compliant home. Incremental costs for these packages reflect the cots used in the On-Bill cost effectiveness methodology. Costs differ for the TDV methodology due to differences in the site gas infrastructure costs (see Section 2.6).

⁴This represents the Efficiency EDR Margin for the Efficiency-Non-Preempted and Efficiency-Equipment packages and Total EDR Margin for the Efficiency & PV/Battery, and Neutral Cost packages.

Table 54: Multifamily Climate Zone 4 Results Summary (Per Dwelling Unit)

Clim PG&	ate Zone 4 E	Annual.			PV Size		quivalent ons (lbs/sf)	NPV of Lifetime	Benefit - Ratio	to Cost (B/C)
Mult	ifamily	Net kWh	Annual : therms	EDR Margin⁴	Change ₹ (kW)⁵	Total	Reduction	Incremental Cost (\$)	On-Bill	TDV
uel 1	Code Compliant	(0)	134	n/a	n/a	2.16	n/a	n/a	n/a	n/a
* W 🚉	Efficiency-Non-Preempted	(0)	127	1.0	(0.01)	2.06	0.10	\$329	0.75	1.24
Mixed	Efficiency-Equipment	(0)	123	1.5	(0.01)	2.01	0.15	\$351	1.06	1.74
\	Efficiency & PV/Battery	(9)	127	11.0	0.04	1.87	0,29	\$2,429	0.17	1.60
N	Code Compliant	1,887	0	n/a	n/a	1.25	n/a	n/a	n/a	n/a
	Efficiency-Non-Preempted	1,794	0	1.0	0.00	1.21	0.05	\$361	1,38	1.54
Electric	Efficiency-Equipment	1,712	0	2.0	0.00	1.15	0.10	\$795	1.23	1.09
₹ E	-Efficiency & PV	453	0	15.0	0.83	0.69	0.57	\$3,158	2.43	1.81
	Efficiency & PV/Battery	(7)	0	28.5	1.17	0.32	0.93	\$6,201	1.30	1.77
uel to	Code Compliant	1,887	Ó	0.0	0.00	1.25	0.90	(\$2,337)	0.65	1.77
ed Fuel Electri	Efficiency & PV	57	.0	15.0	0.83	0.69	1.47	\$822	4.96	>1
Mixe AII-I	Neutral Cost	767	0	11.0	0.70	0.82	1.33	\$0	>1	>1

¹All reductions and incremental costs relative to the mixed fuel code compliant home.



²All reductions and incremental costs relative to the all-electric code compliant home.

³All reductions and incremental costs relative to the mixed fuel code compliant home except the EDR Margins are relative to the Standard Design for each case which is the all-electric code compliant home. Incremental costs for these packages reflect the cots used in the On-Bill cost effectiveness methodology. Costs differ for the TDV methodology due to differences in the site gas infrastructure costs (see Section 2.6).

⁴This represents the Efficiency EDR Margin for the Efficiency-Non-Preempted and Efficiency-Equipment packages and Total EDR Margin for the Efficiency & PV, Efficiency & PV/Battery, and Neutral Cost packages.

⁵Positive values indicate an increase in PV capacity relative to the Standard Design...

Climate Zone 5 PG&E

Table 55: Single Family Climate Zone 5 PG&E Results Summary

Clim PG&	ate Zone 5 E	Annual			PV Size		quivalent ons (lbs/sf)	NPV of Lifetime	Ratio	to Cost (B/C)
Sing	le Family	Net kWh	Annual therms	EDR Margin⁴	Change (kW)⁵	Total	Reduction	Incremental Cost (\$)	On-Bill	TDV
7	Code Compliant	0	331	n/a	n/a	1.79	n/a	n/a	n/a	n/a
Fue	Efficiency-Non-Preempted	(0)	281	2.5	(0.03)	1.55	0.24	\$1,571	1.10	1.22
Mixed	Efficiency-Equipment	(0)	279	2.5	(0.02)	1.54	0.25	\$772	2.29	2.48
Ξ	Efficiency & PV/Battery	(14)	281	9.0	0.07	1.43	0.36	\$5,433	0.37	1,32
2	Code Compliant	4,452	.0	: n/a	n/a	1.01	n/a	n/a	n/a	n/a
	Efficiency-Non-Preempted	3,687	. 0	4.0	0.00	0.86	0.15	\$1,519	2.58	2.31
Electric	Efficiency-Equipment:	3,737	0	4.0	0.00	0.87	0.14	\$2,108	1.85	1.70
AII-E	Efficiency & PV	798	0	18.0	1.72	0.46	0.55	\$8,307	2.31	1.76
	Efficiency & PV/Battery	(8)	0	28.5	2.29	0.24	0.78	\$14,047	1.59	1.63
el to	Code Compliant	4,452	0	0.0	0.00	1.01	0.78	(\$5,349)	0.48	1.32
Mixed Fuel to All-Electric ³	Efficiency & PV	798	0	18.0	1.72	0,46	1.33	\$2,959	2.72	>1
Mixe All-I	Neutral Cost	2,172	0	11.0	1,35	0.70	1.10	\$0	>1	40.07

¹All reductions and incremental costs relative to the mixed fuel code compliant home.

⁵Positive values indicate an increase in PV capacity relative to the Standard Design:



²All reductions and incremental costs relative to the all-electric code compliant home.

³All reductions and incremental costs relative to the mixed fuel code compliant home except the EDR Margins are relative to the Standard Design for each case which is the all-electric code compliant home. Incremental costs for these packages reflect the cots used in the On-Bill cost effectiveness methodology. Costs differ for the TDV methodology due to differences in the site gas infrastructure costs (see Section 2.6).

⁴This represents the Efficiency EDR Margin for the Efficiency-Non-Preempted and Efficiency-Equipment packages and Total EDR Margin for the Efficiency & PV/Battery, and Neutral Cost packages.

Table 56: Multifamily Climate Zone 5 PG&E Results Summary (Per Dwelling Unit)

Clim PG&	ate Zone 5 E	Annual			PV Size	A THE STREET STREET, S	quivalent ons (lbs/sf)	NPV of Lifetime	A STATE OF THE PARTY OF THE PAR	to Cost (B/C)
Mult	ifamily :	Net ⊑ kWh =	Annual therms	EDR Margin⁴	Change (kW)⁵	Total	Reduction	Incremental Cost (\$)	On-Bill	TDV
<u>-</u>	Code Compliant	0	131	л/а	n/a	2.10	n/a	n/a	n/a	n/a
Fue	Efficiency-Non-Preempted	(0)	126	0.5	(0.00)	2.03	0.07	\$180	0.99	1.03
Mixed	Efficiency-Equipment	(0)	117	1.5	(0,00)	1.92	0.19	\$358	1.24	1.34
Ž	Efficiency-&-PV/Battery	(7)	126	9.5	0.05	1.84	0.26	\$2,273	0.15	1.38
	Code Compliant	2,044	0	n/a	n/a	1.32	n/a	n/a	n/a	n/a
tric²	Efficiency-Non-Preempted	1,990	0 -	0.5	-0.00	1.30	0.03	\$247	1.09	0.86
3lec	Efficiency-Equipment	1,738	0	3.5	0.00	1.15	0,17	\$795	2.15	2.03
All-Elect	Efficiency & PV	465	0	17.0	0.91	0.70	0.62	\$3,293	2.53	1.82
	Efficiency & PV/Battery	(6)	O	30.0	1.24	0.34	0.98	\$6,314	1.44	1.69
el to	Code Compliant	2,044	0	0.0	0.00	1.32	0.78	(\$2,337)	0.50	1,:28
Mixed Fuel to All-Electric ³	Efficiency & PV	58	· .0·	17:0	0,91	0.70	1.40	\$956	3.80	>1
Mixe All-	Neutral Cost	874	0	12.5	0.70	0.87	1,23	\$ 0	>1	23.44

¹All reductions and incremental costs relative to the mixed fuel code compliant home.

⁵Positive values indicate an increase in PV capacity relative to the Standard Design



²All reductions and incremental costs relative to the all-electric code compliant home.

³All reductions and incremental costs relative to the mixed fuel code compliant home except the EDR Margins are relative to the Standard Design for each case which is the all-electric code compliant home. Incremental costs for these packages reflect the cots used in the On-Bill cost effectiveness methodology. Costs differ for the TDV methodology due to differences in the site gas infrastructure costs (see Section 2.6).

⁴This represents the Efficiency EDR Margin for the Efficiency-Non-Preempted and Efficiency-Equipment packages and Total EDR Margin for the Efficiency & PV, Efficiency & PV/Battery, and Neutral Cost packages.

Climate Zone 5 PG&E/SoCalGas

Table 57: Single Family Climate Zone 5 PG&E/SoCalGas Results Summary

BANG WET	nate Zone 5 E/SoCalGas	Annual			PV Size		quivalent ons (Ibs/sf)	NPV of Lifetime	place the strain of the	t to Cost o (B/C)
	le Family	Net kWh	Annual therms	EDR Margin ⁴	Change (kW)⁵	Total	Reduction	Incremental Cost (\$)	On- Bill	TDV
+	Code Compliant	, 0	331	n/a	n/a	1.79	n/a	n/a	n/a	n/a
正	Efficiency-Non-Preempted	(0)	281	2.5	(0.03)	1.55	0.24	\$1,571	0.92	1.22
Mixed Fuel ¹	Efficiency-Equipment	(0)	279	2.5	(0.02)	1.54	0.25	\$772	1.98	2.48
Ξ	Efficiency & PV/Battery	(14)	281	9.0	0.07	1.43	0.36	\$5,433	0.31	1.32
	Code Compliant	4,452	0	n/a	n/a	1.01	n/a	n/a	n/a	n/a
rric ²	Efficiency-Non-Preempted	3,687	0	4.0	0.00	0.86	0.15	\$1,519	2.58	2.31
Sect	Efficiency-Equipment	3,737	0	4.0	0.00	0.87	0.14	\$2,108	1.85	1.70
AII-Electric	Efficiency & PV	798	0	18.0	1.72	0.46	0.55	\$8,307	2.31	1.76
7	Efficiency & PV/Battery	(8)	0 :	28.5	2.29	0.24	0.78	\$14,047	1.59	1.63
uel to	Code Compliant	4,452	0	0.0	0.00	1.01	0.78	(\$5,349)	0.48	1.32
Mixed Fuel to All-Electric ³	Efficiency & PV	798	0	18.0	1.72	0.46	1.33	\$2,959	2.75	>1
Mixe All-I	Neutral Cost	2,172	Q	11.0	1.35	0.70	1.10	\$0	>1	40.07

¹All reductions and incremental costs relative to the mixed fuel code compliant home.



²All reductions and incremental costs relative to the all-electric code compliant home.

³All reductions and incremental costs relative to the mixed fuel code compliant home except the EDR Margins are relative to the Standard Design for each case which is the all-electric code compliant home. Incremental costs for these packages reflect the cots used in the On-Bill cost effectiveness methodology. Costs differ for the TDV methodology due to differences in the site gas infrastructure costs (see Section 2.6).

⁴This represents the Efficiency EDR Margin for the Efficiency-Non-Preempted and Efficiency-Equipment packages and Total EDR Margin for the Efficiency & PV, Efficiency & PV/Battery, and Neutral Cost packages.

5Positive values indicate an increase in PV capacity relative to the Standard Design.

Table 58: Multifamily Climate Zone 5 PG&E/SoCalGas Results Summary (Per Dwelling Unit)

CHIER AND TO	ate Zone 5 E/SoCalGas	Annual Net	Annual	= EDR	PV Size		quivalent ons (lbs/sf)	NPV of Lifetime Incremental	A PROPERTY OF THE PARTY OF THE	to Cost (B/C)
Multi	ifamily	kWh	therms	Margin⁴	Change (kW)⁵	Total	Reduction	Cost (\$)	On-Bill	TDV
7	Code Compliant	0	131	n/a	n/a	2.10	n/a	n/a	n/a	n/a
Fuel	Efficiency-Non-Preempted:	(0)	126	0.5	(0.00)	2.03	0.07	\$180	0.85	1.03
Mixed	Efficiency-Equipment	(0)	117	1.5	(0.00)	1.92	0.19	\$358	1.09	1.34
Σ	Efficiency & PV/Battery	(7)	126	9,5	0.05	1,84	0.26	\$2,273	0.14	1,38
2	Code Compliant	2,044	0	n/a	n/a	1.32	n/a	n/a	n/a	n/a
ctric	Efficiency-Non-Preempted	1,990	0	0.5	0.00	1.30	0.03	\$247	1.09	0.86
Elec	Efficiency-Equipment	1,738	.0	3.5	0.00	1.15	0.17	\$795	2.15	2.03
AII:	Efficiency & PV	465	. 0	17.0	0.91	0.70	0.62	\$3,293	2.53	- 1.82
	Efficiency & PV/Battery	(6)	, O.	30.0	1,24	0.34	0,98	\$6,314	1.44	1.69
Fuel to ectric ³	Code Compliant	2,044	0	0.0	0.00	1.32	0.78	(\$2,337)	0.65	1,28
ed Fu -Elect	Efficiency & PV	58	Ö	17.0	- 0.91	0.70	1.40	\$956	4.98	>1
Mixe All-I	Neutral Cost	874	0.	12.5	0.70	0.87	1,23	\$0	>1	23.44

All reductions and incremental costs relative to the mixed fuel code compliant home.

⁵Positive values indicate an increase in PV capacity relative to the Standard Design.



²All reductions and incremental costs relative to the all-electric code compliant home,

³All reductions and incremental costs relative to the mixed fuel code compliant home except the EDR Margins are relative to the Standard Design for each case which is the all-electric code compliant home. Incremental costs for these packages reflect the cots used in the On-Bill cost effectiveness methodology. Costs differ for the TDV methodology due to differences in the site gas infrastructure costs (see Section 2.6).

⁴This represents the Efficiency EDR Margin for the Efficiency-Non-Preempted and Efficiency-Equipment packages and Total EDR Margin for the Efficiency & PV/Battery, and Neutral Cost packages.

Climate Zone 6

Table 59: Single Family Climate Zone 6 Results Summary

in constitution	ate Zone 6 /SoCalGas	Annual			PV Size		Equivalent ons (lbs/sf)	NPV of Lifetime	Benefit Ratio	and a first of the contract
Sing	gle Family Code Compliant Efficiency-Non-Preempte Efficiency-Equipment Efficiency & PV/Battery	Net kWh	Annual therms	EDR Margin ⁴	Change (kW)⁵	Total	Reduction	Incremental Cost (\$)	On-Bill	TDV
el [Code Compliant	(0)	249	n/a	n/a	1.57	n/a	n/a	n/a	n/a
E	Efficiency-Non-Preempted	0	229	2.0	(0.02)	1.47	0.10	\$1,003	0.66	1.15
Mixed	Efficiency-Equipment	(0)	218	1.5	(0.01)	1.41	0.15	\$581	1.58	2.04
Z	Efficiency & PV/Battery	(13)	229	9.5	0,08	1.22	0.34	\$4,889	0.84	1.27
2	Code Compliant	3,099	0.	n/a	n/a	0.87	n/a	n/a	n/a	n/a.
	Efficiency-Non-Preempted	2,885	0	2.0	0.00	0.83	0.05	\$926	1.31	1,41
Jecl	Efficiency-Equipment	2,746	0	2.5	0.00	0.80	0.08	\$846	2.20	2.29
AII-Electric	Efficiency & PV	722	0	14.0	1.37	0.63	0.24	\$6,341	1.19	1.48
7	Efficiency & PV/Battery	(6)	0	26.0	1.93	0.33	0.55	\$12,036	1.15	1.43
el to	Code Compliant	3,099	0	0.0	0.00	0,87	0.69	(\$5,349)	1.19	2.46
Mixed Fuel to All-Electric ³	Efficiency & PV	722	0	14.0	1.37	0.63	0.93	\$992	3.07	>1
Mixe AII-I	Neutral Cost	959	0	12.0	1.36	0.67	0.89	\$0	>1	>1

All reductions and incremental costs relative to the mixed fuel code compliant home.

⁵Positive values indicate an increase in PV capacity relative to the Standard Design.



²All reductions and incremental costs relative to the all-electric code compliant home.

³All reductions and incremental costs relative to the mixed fuel code compliant home except the EDR Margins are relative to the Standard Design for each case which is the all-electric code compliant home. Incremental costs for these packages reflect the cots used in the On-Bill cost effectiveness methodology. Costs differ for the TDV methodology due to differences in the site gas infrastructure costs (see Section 2.6).

⁴This represents the Efficiency EDR Margin for the Efficiency-Non-Preempted and Efficiency-Equipment packages and Total EDR Margin for the Efficiency & PV, Efficiency & PV/Battery, and Neutral Cost packages.

Table 60: Multifamily Climate Zone 6 Results Summary (Per Dwelling Unit)

	nate Zone 6 /SoCalGas	Annual	Annual	EDR	PV Size		quivalent ons (lbs/sf)	NPV of Lifetime	対象を発展してもからかからしたないとる。	to Cost (B/C)
Mult	ifamily	Net kWh	therms	Margin ⁴	Change (kW)⁵	Total	Reduction	Incremental Cost (\$)	On-Bill	TDV
- -	Code Compliant	(0)	114	n/a	n/a	2.17	n/a	n/a	n/a	n/a
Fuel	Efficiency-Non-Preempted	(0)	112	1.0	(0.01)	2.14	0.03	\$190	0.65	1.49
Mixed	Efficiency-Equipment	(0)	103	1.0	(0.00)	2.03	0.15	\$213	1.43	1.74
2	Efficiency & PV/Battery	(6)	112	10.5	0.04	1.76	0.41	\$2,294	0.56	1.35
7	Code Compliant	1,558	Ö	n/a	n/a	1.28	n/a	n/a	n/a	n/a
ctric.	Efficiency-Non-Preempted	1,531	0	1.0	0.00	1.26	0.02	\$231	0.65	1.34
<u> </u>	Efficiency-Equipment	1,430	0	2.0	0.00	1.20	0.08	\$361	1.62	1.91
A E	Efficiency & PV	427	0:	13.5	0.70	0.97	0.31	\$2,580	1.24	1.71
	Efficiency & PV/Battery	(5)	Ó	27.5	1.02	0.49	0.79	\$5,590	1,22	1,58
uel fo	Code Compliant	1,558	0	0.0	0.00	1.28	0.90	(\$2,337)	2.59	2.38
ed Fuel -Electri	Efficiency & PV	53	0	13.5	0.70	0.97	1.20	\$243	9,50	>1
Mixe	Neutral Cost	459	0	12.5	0.70	0.99	1,18	\$0	>1	>1

¹All reductions and incremental costs relative to the mixed fuel code compliant home.



²All reductions and incremental costs relative to the all-electric code compliant home.

³All reductions and incremental costs relative to the mixed fuel code compliant home except the EDR Margins are relative to the Standard Design for each case which is the all-electric code compliant home, incremental costs for these packages reflect the cots used in the On-Bill cost effectiveness methodology, Costs differ for the TDV methodology due to differences in the site gas infrastructure costs (see Section 2.6).

⁴This represents the Efficiency EDR Margin for the Efficiency-Non-Preempted and Efficiency-Equipment packages and Total EDR Margin for the Efficiency & PV, Efficiency & PV/Battery, and Neutral Cost packages.

⁵Positive values indicate an increase in PV capacity relative to the Standard Design.

Climate Zone 7

Table 61: Single Family Climate Zone 7 Results Summary

Clim SDG	iate Zone 7 8&E	Annual	Net Annual	100	PV Size		Equivalent ons (lbs/sf)	NPV of Lifetime	Benefit Ratio	to Cost (B/C)
Sing	ıle Family	kWh	therms	EDR Margin ⁴	Change (kW)⁵	Total	Reduction	Incremental Cost (\$)	On-Bill	TDV
-	Gode Compliant	(0)	196	n/a	n/a	1.30	n/a	n/a	n/a	n/a
Fuel 1	Efficiency-Non-Preempted	(0)	196	0.0	0.00	1.30	0.00	\$0		-
Mixed	Efficiency-Equipment	.0.	171	1.5	(0.00)	1.18	0.12	\$606	1.50	1.40
Ē	Efficiency & PV/Battery	(12)	189	9.0	0.10	1.04	0.26	\$4,028	0.06	1.32
N	Code Compliant	2,479	0	n/a	n/a	0.75	n/a	n/a	n/a	n/a
	Efficiency-Non-Preempted	2,479	.0	0.0	0.00	0.75	0.00	\$0	The Company of the Co	Aller Williams Constitutions
AII-Electric	Efficiency-Equipment	2,222	0	2.0	0.00	0.69	0.06	\$846	1.60	1.65
#	Efficiency & PV	674	0	11.0	1.10	0.58	0.17	\$4,436	1.87	1.55
	Efficiency & PV/Battery	(6)	0.	24.0	1.61	0.29	0.46	\$9,936	1.25	1,47
Mixed Fuel to All-Electric 3	Code Compliant	2,479	0	0.0	0.00	0.75	0.55	(\$5,349)	1,04	2.54
id Fu Electr	Efficiency & PV	674	0	11.0	1.10	0.58	0.72	(\$912)	>1	>1
Vlixe AII-I	Neutral Cost	267	0	13.5	1.35	0.55	0.75	\$0	>1	>1

¹All reductions and incremental costs relative to the mixed fuel code compliant home.

⁵Positive values indicate an increase in PV capacity relative to the Standard Design.



²All reductions and incremental costs relative to the all-electric code compliant home.

³All reductions and incremental costs relative to the mixed fuel code compliant home except the EDR Margins are relative to the Standard Design for each case which is the all-electric code compliant home. Incremental costs for these packages reflect the cots used in the On-Bill cost effectiveness methodology. Costs differ for the TDV methodology due to differences in the site gas infrastructure costs (see Section 2.6).

⁴This represents the Efficiency EDR Margin for the Efficiency-Non-Preempted and Efficiency-Equipment packages and Total EDR Margin for the Efficiency & PV, Efficiency & PV/Battery, and Neutral Cost packages.

Table 62: Multifamily Climate Zone 7 Results Summary (Per Dwelling Unit)

Clim SDG	ate Zone 7 &E	Annual		- FAD	PV Size		quivalent ons (lbs/sf)	NPV of Lifetime	The Control of the Co	to Cost (B/C)
Mult	ifamily	Net kWh	Annual therms	EDR Margin ⁴	Change (kW)⁵	Total	Reduction	Incremental Cost (\$)	On-Bill	:TDV
	Code Compliant	(0)	110	n/a	n/a	2.11	n/a	n/a	n/a	n/a
Fuel1	Efficiency-Non-Preempted	(0)	108	0.5	(0.01)	2.08	0.03	\$90	0.73	2.24
Mixed	Efficiency-Equipment	(0)	99	2.0	(0.00)	1.96	0.15	\$366	1.07	1.41
Σ	Efficiency & PV/Battery	(6)	108	11.0	0.05	1.71	0.40	\$2,188	0.03	1.40
	Code Compliant	1,434	0.	n/a	⊬n/a	1.21	n/a	n/a	n/a	n/a
ilc 2	Efficiency-Non-Preempted	1,416	0	0.5	0.00	1.20	0.01	\$202	0.60	1.02
Electric	Efficiency-Equipment	1,319	0	1.5	0.00	1.14	0.07	\$361	1.59	1.71
AII.E	Efficiency & PV	412	0	12.5	0.61	0.94	0.27	\$2,261	2.08	1.76
	Efficiency & PV/Battery	(5)	0	27.0	0.92	0.47	0.74	\$5,203	1.19	1.62
e 다음	Code Compliant	1,434	0	. 0.0	0.00	1.21	0.90	(\$2,337)	1.12	2.47
od Fuel Electri	Efficiency & PV	-51	*O	12,5	0.61	0.94	1.17	(\$75)	>1	Ϋ́
Mixe All-E	Neutral Cost	294	0	13.5	0.70	0.91	1.20	\$0	>1	>1

¹All reductions and incremental costs relative to the mixed fuel code compliant home.

⁵Positive values indicate an increase in PV capacity relative to the Standard Design



²All reductions and incremental costs relative to the all-electric code compliant home.

³All reductions and incremental costs relative to the mixed fuel code compliant home except the EDR Margins are relative to the Standard Design for each case which is the all-electric code compliant home. Incremental costs for these packages reflect the cots used in the On-Bill cost effectiveness methodology. Costs differ for the TDV methodology due to differences in the site gas infrastructure costs (see Section 2.6).

⁴This represents the Efficiency EDR Margin for the Efficiency-Non-Preempted and Efficiency-Equipment packages and Total EDR Margin for the Efficiency & PV, Efficiency & PV/Battery, and Neutral Cost packages.

Climate Zone 8

Table 63: Single Family Climate Zone 8 Results Summary

and a fair of the	iate Zone 8 /SoCalGas	Annual	,		PV Size		Equivalent ons (lbs/sf)	NPV of Lifetime	Benefit Ratio	at the same of the contract of the
Sing	le Family	Net kWh	Annual therms	EDR Margin⁴	Change (kW)⁵	Total	Reduction	Incremental Cost (\$)	On-Bill	TDV
ī	Code Compliant	(0)	206	n/a	n/a	1.38	n/a	n/a	n/a	n/a
Fuel ¹	Efficiency-Non-Preempted	(0)	198	1.0	(0.02)	1.34	0.05	\$581	0.57	1.41
Mixed	Efficiency-Equipment	0	181	1.5	(0.01)	1.27	0.12	\$586	1.30	1.82
Ē	Efficiency & PV/Battery	(13)	198	8.0	0.08	1:11	0.27	\$4,466	0.90	1.31
2	Code Compliant	2,576	0	n/a	n/a	0.80	n/a	n/a	n/a	n/a
ctric?	Efficiency-Non-Preempted	2,483	0	1.5	.00,0	0.78	0.02	\$926	0.57	1.22
]ec	Efficiency-Equipment	2,352	0	1.5	0.00	0.75	0.05	\$412	2.82	3.03
AII-Ele	Efficiency & PV	703	0	10.5	1.13	0.62	0.18	\$5,373	1.00	1.48
	Efficiency & PV/Battery	(7)	0	21.5	1.67	0.32	0.48	\$11,016	1.09	1.42
el to	Code Compliant	2,576	0	0.0	0.00	0.80	0.58	(\$5,349)	1.83	2.99
Mixed Fuel to All-Electric 3	Efficiency & PV	703	0	10.5	1.13	0.62	0.77	\$25	107.93	>1
Mixe AII-I	Neutral Cost	439	0	11.0	1.36	0.60	0.78	\$0	>1	>1

All reductions and incremental costs relative to the mixed fuel code compliant home.

⁵Positive values indicate an increase in PV capacity relative to the Standard Design.



²All reductions and incremental costs relative to the all-electric code compliant home.

³All reductions and incremental costs relative to the mixed fuel code compliant home except the EDR Margins are relative to the Standard Design for each case which is the all-electric code compliant home. Incremental costs for these packages reflect the cots used in the On-Bill cost effectiveness methodology. Costs differ for the TDV methodology due to differences in the site gas infrastructure costs (see Section 2.6).

⁴This represents the Efficiency EDR Margin for the Efficiency-Non-Preempted and Efficiency-Equipment packages and Total EDR Margin for the Efficiency & PV, Efficiency & PV/Battery, and Neutral Cost packages.

Table 64: Multifamily Climate Zone 8 Results Summary (Per Dwelling Unit)

不同可知识的	ate Zone 8 /SoCalGas	Annual Net	Annual	EDR-	PV Size Change		quivalent ons (lbs/sf)	NPV of Lifetime Incremental	· · · · · · · · · · · · · · · · · · ·	to Cost (B/C)
Mult	ifamily	kWh	therms	Margin ⁴	(kW)⁵	Total	Reduction	Cost (\$)	On-Bill	TDV
	Code Compliant	(0)	109	n/a	n/a	2.18	n/a	n/a	n/a	n/a
" 是"	Efficiency-Non-Preempted	(0)	106	1.5	(0.02)	2.13	0.05	\$250	0.70	1.36
Mixed	Efficiency-Equipment	(0)	99	1.0	(0.00)	2.04	0.14	\$213	1.37	1.67
	Efficiency & PV/Battery	(6)	106	9.5	0.03	1.77	0.41	\$2,353	0.74	1.32
2	Code Compliant	1,409	0	n/a	n/a	1.26	n/a	n/a	n/a	n/a
ctric	Efficiency-Non-Preempted	1,373	0:	1.0	0.00	1.24	0.02	\$231	0.87	1.72
<u>Б</u>	Efficiency-Equipment	1,276	0	1.5	0.00	1.18	0.08	\$361	1.63	1.75
AII-E	Efficiency & PV	426	0	11.5	0.60	0.99	0.27	\$2,240	1.26	1.78
	Efficiency & PV/Battery	(5)	.0	24.0	0.92	0.53	0.73	\$5,249	1.24	1.59
el to	Code Compliant	1,409	0	0.0	0.00	1.26	0.91	(\$2,337)	6.69	2.67
Wixed Fuel to All-Electric ³	Efficiency & PV	53	0	11.5	0,60	0.99	1,18	(\$96)	>1.	>1
Mixe	Neutral Cost	309	0,	12.0	0.70	0.98	1.20	\$0	>1	>1

¹All reductions and incremental costs relative to the mixed fuel code compliant home.



²All reductions and incremental costs relative to the all-electric code compliant home.

³All reductions and incremental costs relative to the mixed fuel code compliant home except the EDR Margins are relative to the Standard Design for each case which is the all-electric code compliant home. Incremental costs for these packages reflect the cots used in the On-Bill cost effectiveness methodology. Costs differ for the TDV methodology due to differences in the site gas infrastructure costs (see Section 2.6).

⁴This represents the Efficiency EDR Margin for the Efficiency-Non-Preempted and Efficiency-Equipment packages and Total EDR Margin for the Efficiency & PV/Battery, and Neutral Cost packages.

⁵Positive values indicate an increase in PV capacity relative to the Standard Design.

Table 65: Single Family Climate Zone 9 Results Summary

12040-2414	iate Zone 9 /SoCalGas	Annual			PV Size	Callegraph of an owner and all the	quivalent ons (lbs/sf)	NPV of Lifetime	Library 1978 - 1. No. 2 (2017)	to Cost (B/C)
Sing	ile Family	Net kWh	Annual therms	EDR Margin⁴	Change (kW) ⁵	Total	Reduction	Incremental Cost (\$)	On-Bill	TDV
_	Gode Compliant	0	229	n/a	n/a	1.53	n/a	n/a	⊬ n/a	n/a
Fuel 1	Efficiency-Non-Preempted	(0)	216	2.5	(0.04)	1.46	0.07	\$912	0.69	1.97
Mixed	Efficiency-Equipment	0	201	2.5	(0.04)	1.38	0.15	\$574	1.80	3.66
Ξ	Efficiency & PV/Battery	(14)	216	8.5	0.05	1.23	0.30	\$4,785	0.99	1.48
	Code Compliant	2,801	0	n/a	n/a	0.87	n/a	n/a	n/a	n/a
ric ²	Efficiency-Non-Preempted	2,645	0	2.5	0.00	0.84	0.04	\$1,180	0.78	1.96
All-Electric	Efficiency-Equipment	2,460	0.	3.0	0.00	0.80	0.07	\$846	2.11	3.22
	Efficiency & PV	745	0	11.5	1.16	0.66	0.21	\$5,778	1.08	1.64
	Efficiency & PV/Battery	(9)	0	21.0	1.72	0.37	0.50	\$11,454	1.11	1.53
el to	Code Compliant	2,801	0	0.0	0.00	0.87	0.66	(\$5,349)	1.67	2.90
Mixed Fuel to All-Electric ³	-Efficiency & PV	745	0	11.5	1.16	.0.66	0.87	\$429	7.15	>1
Mixe All-i	Neutral Cost	594	0	10.0	1.36	0.67	0.86	\$0	>1	>1

¹All reductions and incremental costs relative to the mixed fuel code compliant home.

⁵Positive values indicate an increase in PV capacity relative to the Standard Design.



²All reductions and incremental costs relative to the all-electric code compliant home.

³All reductions and incremental costs relative to the mixed fuel code compliant home except the EDR Margins are relative to the Standard Design for each case which is the all-electric code compliant home. Incremental costs for these packages reflect the cots used in the On-Bill cost effectiveness methodology. Costs differ for the TDV methodology due to differences in the site gas infrastructure costs (see Section 2.6).

⁴This represents the Efficiency EDR Margin for the Efficiency-Non-Preempted and Efficiency-Equipment packages and Total EDR Margin for the Efficiency & PV/Battery, and Neutral Cost packages.

Table 66: Multifamily Climate Zone 9 Results Summary (Per Dwelling Unit)

	ate Zone 9 /SoCalGas	Annual			PV Size		quivalent ons (lbs/sf)	NPV of Lifetime	Benefit i Ratio	A CONTRACT OF CHARLES TO THE ACT
Mult	ifamily	Net kWh	Annual therms	EDR Margin ⁴	Change (kW)⁵	Total	Reduction	Incremental Cost (\$)	On-Bill	TDV
- -	Code Compliant	0	111	n/a	n/a	2.24	n/a	n/a	n/a	n/a
급	Efficiency:Non-Preempted	(0)	109	1.5	(0.03)	2.19	0.05	\$136	1.46	3.35
Mixed	Efficiency-Equipment	(0)	101	2.5	(0.03)	2.08	0.16	\$274	1.66	2.87
Z	Efficiency & PV/Battery	(7)	109	9.5	0.03	1.84	0.40	\$2,234	0.90	1.49
7	Code Compliant	1,468	0.	n/a	n/a	1.33	n/a	n/a	n/a	n/a
ctric.	Efficiency-Non-Preempted	1,414	.0	1.5	0.00	1.30	0.03	\$231	1.29	2.70
-Elect	Efficiency-Equipment	1,334	. 0	1.5	0.00	1.25	80.0	\$361	1.63	1.58
AII-E	Efficiency & PV	441	0 :	_ 11.0	0.60	1.04	0.29	\$2,232	1.34	1.91
	Efficiency & PV/Battery	(7)	0	23.0	0.92	0.58	0.75	\$5,236	1,28	1.67
Fuel to lectric ³	Code Compliant ः । । नही।	1,468	0.	0.0	0.00	1.33	0.91	(\$2,337)	4.38	2.55
d Fu Elect	Efficiency & P.V.	55	Ο.	11.0	0.60	1.04	1.20	(\$104)	>1	>1
Mixed AII-EK	Neutral Cost	331	0.,	11.0	0.70	1.03	1.21	\$0	>1	>1

¹All reductions and incremental costs relative to the mixed fuel code compliant home.



²All reductions and incremental costs relative to the all-electric code compliant home.

⁸All reductions and incremental costs relative to the mixed fuel code compliant home except the EDR Margins are relative to the Standard Design for each case which is the all-electric code compliant home. Incremental costs for these packages reflect the cots used in the On-Bill cost effectiveness methodology. Costs differ for the TDV methodology due to differences in the site gas infrastructure costs (see Section 2.6).

⁴This represents the Efficiency EDR Margin for the Efficiency-Non-Preempted and Efficiency-Equipment packages and Total EDR Margin for the Efficiency & PV/Battery, and Neutral Cost packages.

⁵Positive values indicate an increase in PV capacity relative to the Standard Design.

Climate Zone 10 SCE/SoCalGas

Table 67: Single Family Climate Zone 10 SCE/SoCalGas Results Summary

	nate Zone 10 E/SoCalGas	Annual			PV Size		quivalent ons (lbs/sf)	NPV of Lifetime	Benefit Ratio	医皮脂类 建整维 经执证债券 化机
Sing	gle Family	Net kWh	Annual therms	EDR Margin ⁴	Change (kW)⁵	Total	Reduction	Incremental Cost (\$)	On-Bill	TDV
—	Code Compliant	(0)	239	n/a	n/a	1.61	n/a	n/a	n/a	n/a
Fuel	Efficiency-Non-Preempted	(0)	217	3.0	(0.07)	1.48	0.13	\$1,648	0.63	1,33
Mixed	Efficiency-Equipment	(0)	209	3.0	(0.06)	1.45	0.16	\$593	2.05	3.84
Ž	Efficiency & PV/Battery	(12)	217	9.5	0.03	1.25	0.36	\$5,522	100	1.48
	Code Compliant	2,981	0.	n/a	n/a	0.94	n/a	n/a	n/a	n/a ,
ric	Efficiency-Non-Preempted	2,673	0	3.0	0.00	0.88	0.07	\$1,773	0.92	1.52
lect	Efficiency-Equipment	2,563	, 0	3.0	0.00	0.85	0.10	\$949	2.27	3.19
All-Electric	Efficiency & PV	762	0	11.0	1.17	0.70	0.24	\$6,405	1.08	1.50
	Efficiency & PV/Battery	(6)	0.	21.0	1.74	0.41	0.53	\$12,129	1;11	1.51
el to ric ³	Code Compliant	2,981	, O	0.0	0.00	0.94	0.67	(\$5,349)	1.45	2.66
ed Fuel -Electri	Efficiency & PV	762	0	11.0	1.17	0.70	0.91	\$1,057	3.04	>1
Mixe AII-E	Neutral Cost	770	0	9.0	1.36	0.74	0.87	\$0	>1	>1

¹All reductions and incremental costs relative to the mixed fuel code compliant home.

⁵Positive values indicate an increase in PV capacity relative to the Standard Design.



²All reductions and incremental costs relative to the all-electric code compliant home.

All reductions and incremental costs relative to the mixed fuel code compliant home except the EDR Margins are relative to the Standard Design for each case which is the all-electric code compliant home. Incremental costs for these packages reflect the cots used in the On-Bill cost effectiveness methodology. Costs differ for the TDV methodology due to differences in the site gas infrastructure costs (see Section 2.6).

⁴This represents the Efficiency EDR Margin for the Efficiency-Non-Preempted and Efficiency-Equipment packages and Total EDR Margin for the Efficiency & PV/Battery, and Neutral Cost packages.

Table 68: Multifamily Climate Zone 10 SCE/SoCalGas Results Summary (Per Dwelling Unit)

	ate Zone 10 /SoCalGas	Annual	A = - 1	EDR	PV Size		quivalent ons (lbs/sf)	NPV of Lifetime	the programmer have a few times	to Cost (B/C)
Mult	ifamily	Net kWh	Annual therms	Margin⁴	Change (kW)⁵	- Total	Reduction	Incremental Cost (\$)	On-Bill	#TDV
<u>a</u>	Code Compliant	(0)	112	n/a	n/a	2,29	n/a	n/a	n/a	n/a
. ₽	Efficiency-Non-Preempted	(0)	108	1.5	(0.02)	2.23	0.06	\$278	0.81	1.69
Mixed	Efficiency-Equipment	(0)	102	2.5	(0.04)	2.13	0.16	\$250	1.96	3.27
Ž	Efficiency & PV/Battery	(6)	108	10.0	0.03	1.88	0.41	\$2,376	0.98	1.57
2	Code Compliant	1,507	0	n/a	n/a	1.39	n/a	n/a	n/a	n/a
i Lic	Efficiency-Non-Preempted	1,425	, 0	1.5	0.00	1.34	0.05	\$361	1,16	2.00
<u>le</u> ct	Efficiency-Equipment	1,369	0	1.5	0.00	1.31	0.08	\$361	1.71	1.98
AII-Elec	Efficiency & PV	450	0	10.5	0.60	1.09	0.30	\$2,371	1.31	1.79
	Efficiency & PV/Battery	(4)	:0	23.0	0.93	0.63	0.76	\$5,395	1.27	1.69
el to	Code Compliant	1,507	.0`	0.0	0.00	1.39	* 0.90	(\$2,337)	3.35	2.36
ed Fuel 1 Electric	Efficiency &:PV	56	.0.	10.5	0.60	1.09	1.20*	\$34	70.89	>1
Mixe	Neutral Cost	372	Ö.	10.5	0.70	1.10	1.19	\$0	>1	>1

¹All reductions and incremental costs relative to the mixed fuel code compliant home,



²All reductions and incremental costs relative to the all-electric code compliant home.

³All reductions and incremental costs relative to the **mixed** fuel code compliant home except the EDR Margins are relative to the Standard Design for each case which is the **all-electric** code compliant home. Incremental costs for these packages reflect the cots used in the On-Bill cost effectiveness methodology. Costs differ for the TDV methodology due to differences in the site gas infrastructure costs (see Section 2.6).

⁴This represents the Efficiency EDR Margin for the Efficiency-Non-Preempted and Efficiency-Equipment packages and Total EDR Margin for the Efficiency & PV/Battery, and Neutral Cost packages.

⁶Positive values indicate an increase in PV capacity relative to the Standard Design.

Climate Zone 10 SDGE

Table 69: Single Family Climate Zone 10 SDGE Results Summary

Clin SDC	nate Zone 10 S&E	Annual		EDR	PV Size		equivalent ons (Ibs/sf)	NPV of Lifetime	Benefit Ratio	
Sing	gle Family	Net kWh	Annual therms	Margin⁴	Change (kW) ⁵	Total	Reduction	Incremental Cost (\$)	On-Bill	TDV
-	Gode Compliant	(0)	239	n/a	n/a	1,61	n/a	n/a	n/a	n/a
Fuel ¹	Efficiency-Non-Preempted	(0)	217	3.0	(0.07)	1.48	0.13	\$1,648	0.80	1.33
Mixed	Efficiency-Equipment	<u>(0)</u>	209	3.0	(0.06)	1.45	0.16	\$593	2.64	3.84
E	Efficiency & PV/Battery	(12)	217	9.5	0.03	1.25	0.36	\$5,522	0.58	1.48
2	Code Compliant	2,981	0	n/a	n/a	0.94	n/a	n/a	n/a	n/a
	Efficiency-Non-Preempted	2,673	0,	3.0	0.00	0.88	0.07	\$1,773	1.08	1.52
All-Electric	Efficiency-Equipment	2,563	0	3,0	0.00	0.85	0.10	\$949	2.62	3.19
=======================================	Efficiency & PV	762	0	11.0	1.17	0.70	0.24	\$6,405	1.68	1.50
	Efficiency & PV/Battery	(6)	Ö.	21.0	1.74	0.41	0.53	\$12,129	1.42	1.51
Fuel to lectric ³	Code Compliant	2,981	Ō.	0.0	0.00	0.94	0.67	(\$5,349)	0.90	2.66
d Fu Elect	Efficiency & PV	762	. 0	11.0	1.17	0.70	0.91	\$1,057	4.55	>1
Mixed All-Ele	Neutral Cost	770	0	9.0	1.36	0.74	0.87	\$0	>1	>1

¹All reductions and incremental costs relative to the mixed fuel code compliant home.

⁵Positive values indicate an increase in PV capacity relative to the Standard Design.



²All reductions and incremental costs relative to the all-electric code compliant home.

³All reductions and incremental costs relative to the mixed fuel code compliant home except the EDR Margins are relative to the Standard Design for each case which is the all-electric code compliant home. Incremental costs for these packages reflect the cots used in the On-Bill cost effectiveness methodology. Costs differ for the TDV methodology due to differences in the site gas infrastructure costs (see Section 2.6).

⁴This represents the Efficiency EDR Margin for the Efficiency-Non-Preempted and Efficiency-Equipment packages and Total EDR Margin for the Efficiency & PV/Battery, and Neutral Cost packages.

Table 70: Multifamily Climate Zone 10 SDGE Results Summary (Per Dwelling Unit)

Clim	nate Zone 10 6&E	Annual			PV Size		quivalent ons (lbs/sf)	NPV of Lifetime	1937 State Committee Committee	to Cost (B/C)
Mult	ifamily	Net kWh	Annual therms	EDR Margin⁴	Change (kW)⁵	Total	Reduction	Incremental Cost (\$)	On-Bill	TDV
7	Code Compliant	(0)	112	n/a	n/a	2.29	n/a	n/a	n/a	n/a
Fuel1	Efficiency-Non-Preempted	(0)	108	1.5	(0.02)	2.23	0.06	\$278	1.09	1.69
Mixed	Efficiency-Equipment	(0)	102	2.5	(0.04)	2.13	0.16	\$250	2.60	3.27
Ž	Efficiency & PV/Battery +	(6)	108	10.0	0.03	1.88	0.41	\$2,376	0.23	1.57
	Code Compliant	1,507	0	n/a	n/a	1.39	n/a	n/a	n/a	n/a
ric.	Efficiency-Non-Preempted	1,425	0	1.5	0.00	1.34	0.05	\$361	1.53	2.00
AII-Electric	Efficiency-Equipment	1,369	- 0	1.5	0.00	1.31	0.08	\$361	2.05	1.98
	Efficiency & PV	450	0	10.5	0.60	1.09	0.30	\$2,371	2.12	1.79
	Efficiency & PV/Battery	(4)	0.	23.0	.0.93	0.63	0.76	\$5,395	1.44	1.69
Fuel to lectric ³	:Code Compliant	1,507	0	×0.0	0.00	1.39	0.90	(\$2,337)	0.73	2.36
d Fu Electi	Efficiency & PV	56	0:	10.5	0.60	1.09	1.20	: \$34	54.15	>1
Mixed AII-Ele	Neutral Cost	372	0	10.5	0.70	1.10	1.19	\$ 0	>1	>1

¹All reductions and incremental costs relative to the mixed fuel code compliant home.



²All reductions and incremental costs relative to the all-electric code compliant home.

³All reductions and incremental costs relative to the mixed fuel code compliant home except the EDR Margins are relative to the Standard Design for each case which is the all-electric code compliant home. Incremental costs for these packages reflect the cots used in the On-Bill cost effectiveness methodology. Costs differ for the TDV methodology due to differences in the site gas infrastructure costs (see Section 2.6).

⁴This represents the Efficiency EDR Margin for the Efficiency-Non-Preempted and Efficiency-Equipment packages and Total EDR Margin for the Efficiency & PV/Battery; and Neutral Cost packages.

⁵Positive values indicate an increase in PV capacity relative to the Standard Design.

Table 71: Single Family Climate Zone 11 Results Summary

Clim PG&	ate Zone 11 E	Annual		EDR	PV Size		Equivalent ons (lbs/sf)	NPV of Lifetime	Benefit Ratio	to Cost (B/C)
Sing	le Family	Net kWh	Annual therms	Margin⁴	Change (kW)⁵	Total	Reduction	Incremental Cost (\$)	On-Bill	TDV
el1	Code Compliant	(0)	378	n/a	n/a	2.14	n/a	n/a	n/a	n/a
己	Efficiency-Non-Preempted	(0)	333	4.0	(0.19)	1.90	0.24	\$3,143	0.78	1.20
Mixed	Efficiency-Equipment	0	320	5.0	(0.21)	1.83	0.31	\$1,222	2.50	3.68
Ē	Efficiency & PV/Battery	(18)	333	9.0	(0.09)	1.78	0,36	\$7,026	0.36	1.51
	Code Compliant	4,585	0	n/a	n/a	1.15	n/a	n/a	n/a	n/a
iric ²	Efficiency-Non-Preempted	3,815	0	4.5	0.00	0,99	0.16	\$3,735	1.24	1.47
All-Electric	Efficiency-Equipment	3,533	0	5.5	0.00	0.93	0.22	\$2,108	2.97	3.33
∃-:	Efficiency & PV	957	0	14.0	1.79	0.60	0.55	\$10,827	1.84	1.55
7	Efficiency & PV/Battery	(13)	0	23.0	2.49	0.36	0.79	\$17,077	1.49	1.61
el to ric³	Code Compliant	4,585	0	0.0	0.00	1.15	0.99	(\$5,349)	0.49	1.69
Mixed Fuel to All-Electric ³	Efficiency & PV	957	0	14.0	1.79	0.60	1.54	\$5,478	1,64	>1
Mixe All-I	Neutral Cost	2,429	0	7.0	1.36	0.85	1.29	\$0	>1	>1

¹All reductions and incremental costs relative to the mixed fuel code compliant home.

⁵Positive values indicate an increase in PV capacity relative to the Standard Design.



²All reductions and incremental costs relative to the all-electric code compliant home.

³All reductions and incremental costs relative to the mixed fuel code compliant home except the EDR Margins are relative to the Standard Design for each case which is the all-electric code compliant home. Incremental costs for these packages reflect the cots used in the On-Bill cost effectiveness methodology. Costs differ for the TDV methodology due to differences in the site gas infrastructure costs (see Section 2.6).

⁴This represents the Efficiency EDR Margin for the Efficiency-Non-Preempted and Efficiency-Equipment packages and Total EDR Margin for the Efficiency & PV, Efficiency & PV/Battery, and Neutral Cost packages.

Table 72: Multifamily Climate Zone 11 Results Summary (Per Dwelling Unit)

Clim PG&	ate Zone 11 .E	Annual		EDR	PV Size	The second secon	quivalent ons (lbs/sf)	NPV of Lifetime	PROCESSAN STREET, CARROLL	to Cost (B/C)
Mult	ifamily	Net kWh	Annual therms	Margin ⁴	Change (kW)⁵	- Total	Reduction	Incremental Cost (\$)	On-Bill	TDV
-	Code Compliant	(0)	141	n/a	n/a	2.38	n/a	n/a	n/a	n/a
Fuel	Efficiency-Non-Preempted	0	127	2.5	(0.05)	2.18	0.20	\$850	0.65	1.17
Mixed	Efficiency-Equipment	(0)	126	3.0	(0.06)	2.16	0.22	\$317	1.84	3.29
Ξ	Efficiency & PV/Battery	(9)	127	10.5	- 0.01	2,00	0.38	\$2,950	0.39	1.60
	Code Compliant	1,974	0	n/a	n/a	1.42	n/a	n/a	n/a	n/a
ctric,	Efficiency-Non-Preempted.	1,732	0	3.5	. 0.00	1.29	0.13	\$1,011	1.40	1.64
Elect	Efficiency-Equipment	1,707	0	3.5	0.00	1.26	0.16	\$795	2.02	2.33
₽ E	Efficiency & PV	504	0	13.0	0.77	0.81	0.61	\$3,601	2.22	1.81
	Efficiency & PV/Battery	(6)	0	25.0	1.14	0.45	0.98	\$6,759	1.42	1.81
uel to	Code Compliant	1,974	:0	0.0	0.00	1.42	0.96	(\$2,337)	0.56	1.33
- ده	Efficiency & PV	63	Ö	13.0	0.77	0.81	1.56	\$1,264	3,03	>1
Mixed All-El	Neutral Cost	866	0	9.0	0.70	0.99	1.38	\$0	>1.	73.96

¹All reductions and incremental costs relative to the mixed fuel code compliant home.

⁵Positive values indicate an increase in PV capacity relative to the Standard Design.



²All reductions and incremental costs relative to the all-electric code compliant home.

³All reductions and incremental costs relative to the mixed fuel code compliant home except the EDR Margins are relative to the Standard Design for each case which is the all-electric code compliant home. Incremental costs for these packages reflect the cots used in the On-Bill cost effectiveness methodology. Costs differ for the TDV methodology due to differences in the site gas infrastructure costs (see Section 2.6).

⁴This represents the Efficiency EDR Margin for the Efficiency-Non-Preempted and Efficiency-Equipment packages and Total EDR Margin for the Efficiency & PV, Efficiency & PV/Battery, and Neutral Cost packages.

Table 73: Single Family Climate Zone 12 Results Summary

Clim PG&	ate Zone 12 E	Annual			PV Size		Equivalent ons (Ibs/sf)	NPV of Lifetime	Benefit Ratio	to Cost (B/C)
Sing	le Family	Net kWh	Annual therms	EDR ⊪Margin⁴	Change (kW) ⁵	Total	Reduction	Incremental Cost (\$)	On-Bill	TDV
7	Code Compliant	(0)	390	n/a	n/a	2.11	n/a	n/a	n/a	n/a
Fue! ¹	Efficiency-Non-Preempted	(0)	344	3.5	(0.06)	1.88	0.23	\$1,679	1.18	1.83
Wixed	Efficiency-Equipment	0	338	3.0	(0.05)	1.85	0.26	\$654	3.31	4.65
Ē	Efficiency & PV/Battery	(23)	344	9.5	0.04	1.76	0.35	\$5,568	0.43	1.72
	Code Compliant	4,492	. 0	n/a	n/a	1.05	n/a	n/a	n/a	n/a
tric²	Efficiency-Non-Preempted	3,958	0	3.5	0.00	0.94	0.10	\$3,735	0.78	1.06
Elec	Efficiency-Equipment	3,721	0	5.0	0.00	0.90	0.15	\$2,108	2.00	2.51
All-Electric	Efficiency & PV	867	0	15.5	1.97	0.51	0.53	\$11,520	1.69	1.41
	Efficiency & PV/Battery	(15)	0	25.0	2.62	0,29	0.76	\$17,586	1.29	1.48
el to ríc ³	Code:Compliant	4,492	0	0.0	0.00	1.05	1.07	(\$5,349)	0.63	1.89
Mixed Fuel to All-Electric ³	Efficiency & PV	867	O	15.5	1.97	0.51	1.60	\$6,172	1.77	>1
Mixe AII-1	Neutral Cost	2,374	0	8.0	1.35	0.76	1.36	\$0	>1	>1

¹All reductions and incremental costs relative to the mixed fuel code compliant home.

⁵Positive values indicate an increase in PV capacity relative to the Standard Design.



²All reductions and incremental costs relative to the all-electric code compliant home.

³All reductions and incremental costs relative to the mixed fuel code compliant home except the EDR Margins are relative to the Standard Design for each case which is the all-electric code compliant home. Incremental costs for these packages reflect the cots used in the On-Bill cost effectiveness methodology. Costs differ for the TDV methodology due to differences in the site gas infrastructure costs (see Section 2.6).

⁴This represents the Efficiency EDR Margin for the Efficiency-Non-Preempted and Efficiency-Equipment packages and Total EDR Margin for the Efficiency & PV/Battery, and Neutral Cost packages.

Table 74: Multifamily Climate Zone 12 Results Summary (Per Dwelling Unit)

Clim PG&	ate Zone 12 E	Annual Net		EDR	PV Size	CORNER COMPANIES LE COMPANIES DE LA PROPERTIE DE LA COMPANIE DE LA	quivalent ons (lbs/sf)	NPV of Lifetime	and the control of the street of the	to Cost (B/C)
Mult	ifamily	kWh	Annual therms	Margin⁴	Change (kW)⁵	Total	Reduction	Incremental Cost (\$)	On-Bill	TDV
<u>.</u>	Code Compliant	(0)	143	n/a	n/a	2.33.	n/a	n/a	n/a	n/a
Enel	-Efficiency-Non-Preempted	(0)	135	1.5	(0.02)	2.21	0.12	\$291	1.10	2.22
Mixed	Efficiency-Equipment	0 ,	128	2.5	(0.03)	2,12	0.21	\$434	1.25	2.22
Ξ	Efficiency & PV/Battery	(11)	135	10.0	0.03	2.03	0.30	\$2,394	0.30	1.75
	Code Compliant	1,963	0	h/a	n/a	1.34	n/a	n/a	n/a	n/a
Ė	Efficiency-Non-Preempted	1,792	0	2.5	0.00	1.24	0.09	\$1,011	0.91	1.12
Electric	Efficiency-Equipment	1,744	0	2 <i>.</i> 5	0.00	1.21	0.13	\$795	1.56	1.63
AII-E	Efficiency & PV	472	.0	14.0	0.84	0.73	0.60	\$3,835	2.08	1.65
	Efficiency & PV/Battery	(8)	0	26.5	1.20	0.38	0.96	\$6,943	1.26	1.68
d Fuel to lectric ³	Code Compliant	1,963	0	0.0	0.00	1.34	1.00	(\$2,337)	0.64	1.66
ed Fu -Elect	Efficiency & PV	59	0	14.0	0.84	0.73	1,60	\$1,498	2.88	۸,
Mixe All-I	Neutral Cost	872	0:	9.5	0.70	0.92	1.42	\$0	>1	>1

¹All reductions and incremental costs relative to the mixed fuel code compliant home.



²All reductions and incremental costs relative to the all-electric code compliant home.

³All reductions and incremental costs relative to the mixed fuel code compliant home except the EDR Margins are relative to the Standard Design for each case which is the all-electric code compliant home. Incremental costs for these packages reflect the cots used in the On-Bill cost effectiveness methodology. Costs differ for the TDV methodology due to differences in the site gas infrastructure costs (see Section 2.6).

⁴This represents the Efficiency EDR Margin for the Efficiency-Non-Preempted and Efficiency-Equipment packages and Total EDR Margin for the Efficiency & PV/Battery, and Neutral Cost packages.

⁵Positive values indicate an increase in PV capacity relative to the Standard Design.

Table 75: Single Family Climate Zone 13 Results Summary

Clim PG&	ate Zone 13 E	Annual			PV Size	 September 1987 of the september 1989. 	quivalent ons (lbs/sf)	NPV of Lifetime	Benefit Ratio	to Cost (B/C)
Sing	le Family	Net kWh	Annual therms	EDR Margin⁴	Change (kW) ⁵	Total	Reduction	Incremental Cost (\$)	On-Bill	TDV
⊺[en	Code Compliant	(0)	352	n/a	n/a	2.02	n/a	n/a	n/a	n/a
	Efficiency-Non-Preempted	(0)	311	4.5	(0.21)	1.80	0.22	\$3,060°	0.76	1.28
Mixed	Efficiency-Equipment	(0)	292	5.5	(0.24)	1.70	0.32	\$611	5.26	8.40
Ξ	Efficiency & PV/Battery	(19)	311	9.5	(0.11)	1.69	0.33	.\$6,954	0.36	1.56
	Code Compliant	4,180	0	n/a	n/a	1.08	n/a	n/a	n/a	n/a
íric²	Efficiency-Non-Preempted	3,428	.0	5.0	0.00	0.92	0.15	\$4,154	1.12	1.40
AII-Electric	Efficiency-Equipment	3,177	0	6.0	0.00	0.87	0.21	\$2,108	2.88	3.30
3-1-	Efficiency & PV	934	0	13.0	1.61	0.57	0.50	\$10,532	1.70	1.47
	Efficiency & PV/Battery	(11)	0	22.0	2.32	0.35	0.73	\$16,806	1.40	1.54
el to	Code Compliant	4,180	0	0.0	0.00	1.08	0.94	(\$5,349)	0.54	1.83
ed Fuel Electri	Efficiency & PV	934	0	13.0	1.61	0.57	1.44	\$5,184	1.56	>1
Mixed All-El	Neutral Cost	2,092	0	7.0	1.36	0.79	1.23	\$0	>1	>1

¹All reductions and incremental costs relative to the mixed fuel code compliant home.

⁵Positive values indicate an increase in PV capacity relative to the Standard Design.



²All reductions and incremental costs relative to the all-electric code compliant home.

³All reductions and incremental costs relative to the mixed fuel code compliant home except the EDR Margins are relative to the Standard Design for each case which is the all-electric code compliant home. Incremental costs for these packages reflect the cots used in the On-Bill cost effectiveness methodology. Costs differ for the TDV methodology due to differences in the site gas infrastructure costs (see Section 2.6).

⁴This represents the Efficiency EDR Margin for the Efficiency-Non-Preempted and Efficiency-Equipment packages and Total EDR Margin for the Efficiency & PV/Battery, and Neutral Cost packages.

Table 76: Multifamily Climate Zone 13 Results Summary (Per Dwelling Unit)

Clim PG&	iate Zone 13	Annual			PV Size	Transaction of the Committee of Tention	quivalent ons (lbs/sf)	NPV_of Lifetime	and the day for the first to the	to Cost (B/C)
Mult	ifamily	Net kWh	Annual therms	EDR Margin⁴	∴ Change (kW)⁵	Total	Reduction	Incremental Cost (\$)	On-Bill	TDV
	Code Compliant	(0)	135	n/a	n/a	2.30	n/a	n/a	n/a	n/a
Fuel	Efficiency-Non-Preempted	(0)	123	3.0	(0.05)	2.12	0.18	\$831	0.63	1.27
Mixed	Efficiency-Equipment	(0)	121	3.0	(0.07)	2.10	0.21	\$290	1.95	3.75
S	Efficiency, & PV/Battery	(9)	123 -	10.5	0.00	1.95	0.35	\$2,936	0.38	1.64
	Code Compliant	1,849	0	n/a	n/a	1,36	n/a	n/a *	n/a	n/a
ctric	Efficiency-Non-Preempted	1,629	0	3.0	0.00	1.24	0.12	\$1,011	1.31	1.56
Elect	Efficiency-Equipment	1;590	0	3.5	0.00	1.21	0.16	\$795	1.98	2.28
AII-E	Efficiency & PV	501	.0	12.0	0.73	0.80	0.56	\$3,462	2.12	1.71
	Efficiency & PV/Battery	(5)	0	23.5	1.11	0.44	0.92	\$6,650	1.35	1.74
uel to	Code Compliant	1,849	. 0	0.0	0.00	1.36	0.94	(\$2,337)	0.63	1.54
ed Fuel Electri	Efficiency & PV	63	0	12.0	0.73	0.80	1.50	\$1,125	3,22	>1
Mixe All-I	Neutral Cost	773	10.	8.5	0.70	0.94	1,36	\$0	>1	>1

¹All reductions and incremental costs relative to the mixed fuel code compliant home.

⁵Positive values indicate an increase in PV capacity relative to the Standard Design.



²All reductions and incremental costs relative to the all-electric code compliant home.

⁹All reductions and incremental costs relative to the **mixed** fuel code compliant home except the EDR Margins are relative to the Standard Design for each case which is the **all-electric** code compliant home. Incremental costs for these packages reflect the cots used in the On-Bill cost effectiveness methodology. Costs differ for the TDV methodology due to differences in the site gas infrastructure costs (see Section 2.6).

⁴This represents the Efficiency EDR Margin for the Efficiency-Non-Preempted and Efficiency-Equipment packages and Total EDR Margin for the Efficiency & PV/Battery, and Neutral Cost packages.

Climate Zone 14 SCE/SoCalGas

Table 77: Single Family Climate Zone 14 SCE/SoCalGas Results Summary

	Climate Zone 14 SCE/SoCalGas				PV Size	CO2-Equivalent Emissions (Ibs/sf)		NPV of Lifetime	Benefit to Cost Ratio (B/C)	
	le Family	Net kWh	Annual therms	EDR Margin⁴	Change (kW)⁵	Total	Reduction	Incremental Cost (\$)	On-Bill	TDV
LI	Code Compliant	(0)	371	n/a	n/a	2.35	n/a	n/a	n/a	n/a
Fuel ¹	Efficiency-Non-Preempted	(0)	319	4.5	(0.17)	2.06	0.29	\$1,662	1.57	2.46
Mixed	Efficiency-Equipment	(0)	305	5.5	(0.19)	1.98	0.36	\$799	3.95	6.14
Z	Efficiency & PV/Battery	(5)	319	9.0	(0.08)	1,83	0.52	\$5,526	1.31	1.74
(A)	Code Compliant	4,725	0.	n/a	n/a	1.38	n/a	n/a	n/a	n/a
ıric ²	Efficiency-Non-Preempted	3,819	0	5.5	0.00	1.19	0.19	\$4,154	0.95	1.46
AII-Electric	Efficiency-Equipment	3,676	0	6.0	0.00	1.16	0.22	\$2,108	2.29	3.13
7	Efficiency & PV	953	0	15.5	1:60	0,93	0.45	\$10,459	1.21	1.62
Ţ	Efficiency & PV/Battery	(2)	0.	23.5	2.21	0.63	0.75	\$16,394	1.35	1.59
.3°C	Code Compliant	4,725	0	0.0	0.00	1.38	0.97	(\$5,349)	0.72	1.67
Fuel to ectric ³	Efficiency & PV	953	0	15.5	1.60	0.93	1.42	\$5,111	1.01	>1
. 9 ш	Neutral Cost	2,299	0	8.5	1.35	1.15.	1.19	\$0	0.00	>1
MIX	Min Cost Effectiveness	1,853	0	10.0	1.61	1.12	1.23	(\$1,000)	1.24	>1

All reductions and incremental costs relative to the mixed fuel code compliant home.

⁵Positive values indicate an increase in PV capacity relative to the Standard Design.



²All reductions and incremental costs relative to the all-electric code compliant home.

All reductions and incremental costs relative to the mixed fuel code compliant home except the EDR Margins are relative to the Standard Design for each case which is the all-electric code compliant home. Incremental costs for these packages reflect the cots used in the On-Bill cost effectiveness methodology. Costs differ for the TDV methodology due to differences in the site gas infrastructure costs (see Section 2.6).

This represents the Efficiency EDR Margin for the Efficiency-Non-Preempted and Efficiency-Equipment packages and Total EDR Margin for the Efficiency & PV, Efficiency & PV/Battery, Neutral Cost, and Min Cost Effectiveness packages.

Table 78: Multifamily Climate Zone 14 SCE/SoCalGas Results Summary (Per Dwelling Unit)

SCE	ate Zone 14 /SoCalGas	Annual Net	Annual	EDR	PV Size Change	CO2-Equivalent Emissions (lbs/sf)		NPV of Lifetime Incremental	Benefit to Cost - Ratio (B/C)	
WUIT	ifamily	kWh≔	therms	Margin ⁴	(kW) ⁵	Total	Reduction	Cost (\$)	On-Bill	TDV
. T	Code Compliant	(0)	141	n/a	n/a	2,76	n/a	n/a	n/a	n/a
₹	Efficiency-Non-Preempted	(0)	126	3.0	(0.04)	2.53	0.23	\$874	0.73	1.21
Mixed	Efficiency=Equipment	(0)	126	3.0	(0.05)	2.52	0.23	\$347	1.96	2:99
Ξ	Efficiency & PV/Battery	(3)	126	9.5	0.01	2.18	0.58	\$2,957	1.09	1.39
6-10-1	Code Compliant	2,022	0	n/a	n/a	1.73	n/a	n/a	n/a	n/a
ن. ط	Efficiency-Non-Preempted	1,759	0	3.5	0.00	1.58	0.15	\$1,011	1.24	1.65
AII-Electric	Efficiency-Equipment	1,748	0	3.5	0.00	1.56	0.16	\$795	1.59	2.20
=	Efficiency & PV	504	0	14.0	0.70	1.26	0.47	\$3,356	1.39	1.91
	Efficiency & PV/Battery	(2)	0	24.5	1.03	0.79	0.94	\$6,380	1.36	1.77
uel to	Code Compliant	2,022	0	0,0	0.00	1.73	1.03	(\$2,337)	1.13	1.48
누음	Efficiency & PV	63	.0	14.0	0.70	1.26	1.50	\$1,019	2.57	>1
Mixe All-E	Neutral Cost	772	0.	10.0	0.70	1.41	1.35	\$0	>1	>1

All reductions and incremental costs relative to the mixed fuel code compliant home.

⁵Positive values indicate an increase in PV capacity relative to the Standard Design.



²All reductions and incremental costs relative to the all-electric code compliant home.

³All reductions and incremental costs relative to the mixed fuel code compliant home except the EDR Margins are relative to the Standard Design for each case which is the all-electric code compliant home. Incremental costs for these packages reflect the cots used in the On-Bill cost effectiveness methodology. Costs differ for the TDV methodology due to differences in the site gas infrastructure costs (see Section 2.6).

⁴This represents the Efficiency EDR Margin for the Efficiency-Non-Preempted and Efficiency-Equipment packages and Total EDR Margin for the Efficiency & PV/Battery, and Neutral Cost packages.

Climate Zone 14 SDGE

Table 79: Single Family Climate Zone 14 SDGE Results Summary

Clim SDG	rate Zone 14 6&E	Annual		FDD	PV Size		Equivalent ons (lbs/sf)	NPV of Lifetime Incremental	Benefit to Cost Ratio (B/C)	
Sing	ile Family	Net kWh	Annual therms	EDR Margin ⁴	Change (kW)⁵	Total	Reduction	Cost (\$)	On-Bill	TDV
<u>,</u>	Code Compliant	(0)	371	n/a	:n/a	2.35	n/a	n/a	n/a	n/a
Fuel (Efficiency-Non-Preempted	(0)	319	4.5	(0.17)	2.06	0.29	\$1,662	1.92	2.46
Mixed	Efficiency-Equipment	(0)	305	5.5	(0.19)	1.98	0.36	\$799	4.88	6.14
Ξ	Efficiency & PV/Battery	(5)	319	9.0	(0.08)	1.83	0.52	\$5,526	1.23	1.74
2	Code Compliant	4,725	.0	n/a	n/a	1.38	n/a	n/a	n/a	n/a
	Efficiency-Non-Preempted	3,819	0	5.5	0.00	1.19	0.19	\$4,154	1.30	1.46
All-Electric	Efficiency-Equipment	3,676	0	6.0	0.00	1.16	0.22	\$2,108	2.92	3.13
#	Efficiency & PV	953	0	15.5	1.60	0.93	0.45	\$10,459	1.80	1.62
	Efficiency & PV/Battery	(2)	0 .	23.5	2.21	0.63	0.75	\$16,394	1.67	1.59
ked Fuel to I-Electric 3	Code Compliant	4,725	0	0.0	0.00	1.38	0.97	(\$5,349)	0.60	1.67
d Fu	Efficiency & PV	953	0	15.5	1.60	0,93	1.42	\$5,111	1.94	>1
Mixe All-I	Neutral Cost	2,299	0	8.5	1.35	1.15	1.19	\$0	>1	>1

¹All reductions and incremental costs relative to the mixed fuel code compliant home.

⁵Positive values indicate an increase in PV capacity relative to the Standard Design.



²All reductions and incremental costs relative to the all-electric code compliant home.

³All reductions and incremental costs relative to the mixed fuel code compliant home except the EDR Margins are relative to the Standard Design for each case which is the all-electric code compliant home. Incremental costs for these packages reflect the cots used in the On-Bill cost effectiveness methodology. Costs differ for the TDV methodology due to differences in the site gas infrastructure costs (see Section 2.6).

⁴This represents the Efficiency EDR Margin for the Efficiency-Non-Preempted and Efficiency-Equipment packages and Total EDR Margin for the Efficiency & PV/Battery, and Neutral Cost packages.

Table 80: Multifamily Climate Zone 14 SDGE Results Summary (Per Dwelling Unit)

	Climate Zone 14 SDG&E			EDR	PV Size Change	CO2-Equivalent Emissions (lbs/sf)		NPV of Lifetime — Incremental	Benefit to Cost Ratio (B/C)	
Mult	ifamily	Net kWh	∴ Annual ∵ therms	Margin⁴	(kW)⁵	Total	Reduction	Cost (\$)	On-Bill	TDV
el1	Code Compliant	(0)	141	n/a	n/a	2.76	n/a	n/a	n/a	n/a
근	Efficiency-Non-Preempted	(0)	126	3.0	(0.04)	2.53	0.23	\$874	0.93	1.21
xed	Efficiency-Equipment	(0)	126	3.0	(0.05)	2.52	0.23	\$347	2.48	2.99
E	Efficiency & PV/Battery	(3)	126	9.5	0.01	2.18	0.58	\$2,957	0.51	1.39
	Code Compliant	2,022	0	n/a	n/a	1.73	n/a	n/a	n/a	n/a
iric ²	Efficiency-Non-Preempted	1,759	0	3.5	0.00	1.58	0.15	\$1,011	1.47	1.65
lectric	Efficiency-Equipment	1,748	0	3.5	0.00	1.56	0.16	\$795	2.00	2.20
AII-E	Efficiency & PV	504	0	14.0	0.70	1.26	0.47	\$3,356	2.16	1.91
	Efficiency & PV/Battery	(2)	0	24.5	1.03	0.79	0.94	\$6,380	1.69	1.77
el to	Code Compliant	2,022	. 0	0.0	0.00	1.73	1.03	(\$2,337)	0.51	1.48
ed Fue Electri	Efficiency & PV	63	. 0	14.0	0:70	1.26	1.50	\$1,019	2,60	>1
Mixe	Neutral Cost	772	0	10.0	0.70	1.41	1.35	\$0	>1	>1

¹All reductions and incremental costs relative to the mixed fuel code compliant home.

⁵Positive values indicate an increase in PV capacity relative to the Standard Design.



²All reductions and incremental costs relative to the all-electric code compliant home.

³All reductions and incremental costs relative to the mixed fuel code compliant home except the EDR Margins are relative to the Standard Design for each case which is the all-electric code compliant home. Incremental costs for these packages reflect the cots used in the On-Bill cost effectiveness methodology. Costs differ for the TDV methodology due to differences in the site gas infrastructure costs (see Section 2.6).

⁴This represents the Efficiency EDR Margin for the Efficiency-Non-Preempted and Efficiency-Equipment packages and Total EDR Margin for the Efficiency & PV/Baltery, and Neutral Cost packages.

Table 81: Single Family Climate Zone 15 Results Summary

(E) virialista (ph	ate Zone 15 /SoCalGas	Annual			PV Size	CO2-Equivalent Emissions (lbs/sf)		NPV of Lifetime Incremental	Benefit to Cost Ratio (B/C)	
Sing	ile Family	Net kWh	Annual therms	EDR Margin⁴	Change (kW)⁵	Total	Reduction	Incremental Cost (\$)	On-Bill	TDV
Έ.	Code Compliant	0	. 149	n/a	n/a	1.69	n/a	n/a	n/a	n/a
Fuel 1	Efficiency-Non-Preempted	.0	141	4.5	(0.43)	1.56	0.13	\$2,179	1.00	1.58
Mixed	Efficiency-Equipment	(0)	132	4.5	(0.45)	1.51	0.18	(\$936)	>1	>1
Ξ	Efficiency & PV/Battery	(3)	141	7.0	(0.34)	- 1.38	0.32	\$6,043	1,15	1.51
2	Code Compliant	2,149	0	n/a	n/a	1.32	n/a	n/a	n/a	n/a
	Efficiency-Non-Preempted	1,230	0	5.5	0,00	1.12	-0.20	\$4,612	1.12	1.58
Iec.	Efficiency-Equipment	866	0	7.0	0.00	1.04	0.28	\$2,108	3.30	4.47
All-Electric	Efficiency & PV	1,030	0.	6.0	0.12	1.10	0.22	\$5,085	1.12	1.57
	Efficiency & PV/Battery	(2)	0.	13.0	0.83	0.84	0.48	\$11,382	1.16	1.54
el to	Code Compliant	2,149	0	0.0	0.00	1.32	0.37	(\$5,349)	1.73	2.21
Mixed Fuel to AII-Electric ³	Efficiency & PV	1,030	0	6.0	0.12	1.10	0.59	(\$264)	>1	>1
Mixe AII-I	Neutral Cost	.23	0	6.0	1.36	1.13	0.57	\$0	>1	>1

¹All reductions and incremental costs relative to the mixed fuel code compliant home.

⁵Positive values indicate an increase in PV capacity relative to the Standard Design.



²All reductions and incremental costs relative to the all-electric code compliant home.

All reductions and incremental costs relative to the mixed fuel code compliant home except the EDR Margins are relative to the Standard Design for each case which is the all-electric code compliant home. Incremental costs for these packages reflect the cots used in the On-Bill cost effectiveness methodology. Costs differ for the TDV methodology due to differences in the site gas infrastructure costs (see Section 2.6).

⁴This represents the Efficiency EDR Margin for the Efficiency-Non-Preempted and Efficiency-Equipment packages and Total EDR Margin for the Efficiency & PV, Efficiency & PV/Battery, and Neutral Cost packages.

Table 82: Multifamily Climate Zone 15 Results Summary (Per Dwelling Unit)

(李) 李) 经 新	ate Zone 15 /SoCalGas	Annual			PV Size計		quivalent ons (lbs/sf)	NPV of Lifetime	Low-Market Workship Comment	to Cost (B/C)
Mult	ifamily	Net kWh	Annual therms	. EDR . Margin⁴	Change - (kW) ⁵	Total	Reduction	Incremental Cost (\$)	On-Bill	₹DV.
el 1	Code Compliant	0 -	.93	n/a	n/a	2.53	n/a	n/a	n/a	n/a
2	Efficiency-Non-Preempted	Ö	92	4.0	(0.15)	2.42	0.11	\$510	1.35	2.28
Mixed	Efficiency-Equipment	0	86	4.0	(0.16)	2.33	0.20	(\$157)	>1	>1
Ē	Efficiency & PV/Battery	(3)	92	8.5	(0.10)	2.13	0.40	\$2,604	1.29	1.70
2	Code Compliant	1,243	0	n/a	n/a	1.78	n/a	n/a	n/a	n/a
	Efficiency-Non-Preempted	954	0	4.0	0.00	1.61	0.17"	\$1,011	1.50	2.28
<u> </u>	Efficiency-Equipment	764	0	6.0	0.00	1.50	0.29	\$1,954	1.24	1.72
AII-Electric	Efficiency & PV	548	. 0	. 7.0	0.24	1.50	0.28	\$1,826	1.43	2.07
	Efficiency & PV/Battery	(3)	. 0	16.5	0.62	1.08	0.70	\$5,020	1.34	1.80
Fuel to ectric ³	Code Compliant	1,243	0	0.0	0.00	1.78	0.75	(\$2,337)	6.36	2.35
ed Fu Elect	Efficiency & PV	68	.0	7.0	0.24	1,50	1.03	(\$511)	>1	>1
Mixe AII-J	Neutral Cost	78	0	7.5	0.70	1.48	1.05	.\$0	>1	>1

¹All reductions and incremental costs relative to the mixed fuel code compliant home.



²All reductions and incremental costs relative to the all-electric code compliant home.

³All reductions and incremental costs relative to the mixed fuel code compliant home except the EDR Margins are relative to the Standard Design for each case which is the all-electric code compliant home. Incremental costs for these packages reflect the cots used in the On-Bill cost effectiveness methodology. Costs differ for the TDV methodology due to differences in the site gas infrastructure costs (see Section 2.6).

⁴This represents the Efficiency EDR Margin for the Efficiency-Non-Preempted and Efficiency-Equipment packages and Total EDR Margin for the Efficiency & PV/Battery, and Neutral Cost packages.

⁵Positive values indicate an increase in PV capacity relative to the Standard Design.

Table 83: Single Family Climate Zone 16 Results Summary

Clim PG8	nate Zone 16 Æ	Annual			PV Size	CO2-Equivalent Emissions (lbs/sf)		NPV of Lifetime	Benefit to Cost Ratio (B/C)	
	jle Family	Net kWh	Annual therms	EDR Margin⁴	Change (kW) ⁵	Total	Reduction	Incremental Cost (\$)	On-Bill	TDV
1.	Code Compliant	(0)	605	n/a	n/a	3.31	n/a	n/a	n/a	n/a
Fue!1	Efficiency-Non-Preempted	0	454	5.0	0.01	2.59	0.72	\$3,542	1.62	1.46
Mixed	Efficiency-Equipment	0	474	6.0	(0.08)	2.66	0.65	\$2,441	2.19	2.20
	Efficiency & PV/Battery	(18)	454	10.5	0.10	2.36	0.95	\$7,399	0.87	1.37
7	Code Compliant	7,694	0	n/a	n/a	1.73	n/a	n/a	n/a	n/a
	Efficiency-Non-Preempted	5,696	0	9.5	0.00	1,38	0.35	\$5,731	1.72	1.69
:lect	Efficiency-Equipment	6,760	0	4.5	0.00	1,55	0.18	\$2,108	2.36	2.32
All-Electric	Efficiency & PV	1,032	0	26.5	2.75	0.94	0.79	\$16,582	2.09	1.62
	Efficiency & PV/Battery	(11)	0	35,0	3,45	0.64	1.09	\$22,838	1,71	1.55
<u>.</u> و	Code Compliant	7,694	0	0.0	0.00	1.73	1.58	(\$5,349)	0.31	0.68
Fuel t ectric	Efficiency & PV	1,032	0	26.5	2.75	0.94	2.37	\$11,234	1.55	2.02
Mixed I All-Ele	Neutral Cost	5,398	0	8.5	1.35	1.51	1.80	\$0	0.00	0.74
Mix	Min Cost Effectiveness	3,358	0	16.0	2.56	1.32	1.99	(\$4,753)	1.24	1.40

All reductions and incremental costs relative to the mixed fuel code compliant home.

⁵Positive values indicate an increase in PV capacity relative to the Standard Design.



²All reductions and incremental costs relative to the all-electric code compliant home.

³All reductions and incremental costs relative to the mixed fuel code compliant home except the EDR Margins are relative to the Standard Design for each case which is the all-electric code compliant home. Incremental costs for these packages reflect the cots used in the On-Bill cost effectiveness methodology. Costs differ for the TDV methodology due to differences in the site gas infrastructure costs (see Section 2.6).

This represents the Efficiency EDR Margin for the Efficiency-Non-Preempted and Efficiency-Equipment packages and Total EDR Margin for the Efficiency & PV, Efficiency & PV/Battery, Neutral Cost, and Min Cost Effectiveness packages.

Table 84: Multifamily Climate Zone 16 Results Summary (Per Dwelling Unit)

100000	Climate Zone 16 PG&E				PV Size	the state of majority and the	quivalent ons (lbs/sf)	NPV of Lifetime	Benefit to Cost Ratio (B/C)	
Mult	ifamily	Net kWh	Annual therms	EDR Margin ⁴	Change (kW) ⁵	Total	Reduction	©ost (\$)	On-Bill	TDV
el1	Çode Compliant	0:	206	n/a	n/a.	3.45	n/a	n/a	n/a	n/a
표	Efficiency-Non-Preempted	(0)	172	2.0	0.03	3.02	0.44	\$937	1.11	1.19
Mixed	Efficiency-Equipment	(0)	183	2.5	(0.02)	3.12	0.33	\$453	1.76	2.15
\`∑	Efficiency & PV/Battery	(9)	172	9.5	0.08	2.65	0.80	\$3,028	0.47	1.28
7	Code Compliant	2,699	.0.	n/a	n/a	1.86	n/a	n/a	n/a	n/a
Ë	Efficiency-Non-Preempted-	2,329	0	4,0	0.00	1.70	0.16	\$843	2.08	2.05
Шecl	Efficiency-Equipment	2,470	0	3.0	0.00	1.74	0.13	\$795	1.59	1.70
AII.E	Efficiency & PV	518	Ō	19.5	1.07	1.23	0.63	\$4,423	2.58	1.89
	Efficiency & PV/Battery	(6)	-0	29.5	1.42	0.75	- 1,11	\$7,533	1.65	1.69
el to	Code Compliant	2,699	: O	0.0	0.00	1.86	1.59	(\$2,337)	0.43	1.03
표정	Efficiency & PV	65	0	19.5	1.07	1.23	2.22	\$2,087	2,87	>1
Mixed All-Ele	Neutral Cost	1,518	· jo	10.0	0.70	1.56	1.90	\$0	≽1	2.58

⁵Positive values indicate an increase in PV capacity relative to the Standard Design.



¹All reductions and incremental costs relative to the mixed fuel code compliant home. ²All reductions and incremental costs relative to the all-electric code compliant home.

³All reductions and incremental costs relative to the mixed fuel code compliant home except the EDR Margins are relative to the Standard Design for each casewhich is the all-electric code compliant home. Incremental costs for these packages reflect the cots used in the On-Bill cost effectiveness methodology. Costs differ for the TDV methodology due to differences in the site gas infrastructure costs (see Section 2.6).

⁴This represents the Efficiency EDR Margin for the Efficiency-Non-Preempted and Efficiency-Equipment packages and Total EDR Margin for the Efficiency & PV, Efficiency & PV/Battery, and Neutral Cost packages.



London N. Breed Mayor

COMMISSION

Angus McCarthy President

Debra Walker Vice-President

Kevin Clinch John Konstin Frank Lee San Moss James Warshell

Sonya Harris Secretary

Shirley Wong Assistant Secretary

Tom C. Hui S.E., C.B.O., Director BUILDING INSPECTION COMMISSION (BIC) RECEIVED RECEIVED

Department of Building Inspection Voice (415) 558-5164 Fax (415) 558-6509 1660 Mission Street, San Francisco, California 94103-2414

2013 SEL 52 MU 2. 20

August 12, 2019

Ms. Angela Calvillo
Clerk of the Board
Board of Supervisors, City Hall

1 Dr. Carlton B. Goodlett Place, Room 244

San Francisco, CA 94102-4694

RE: Code amendments to the 2019 California Building Standards Code, including the Building, Existing Building, Residential, Mechanical, Plumbing, Electrical, and Green Building Codes and recommend approval to the Board of Supervisors.

Dear Ms. Calvillo:

On July 17, 2019 the Building Inspection Commission held a public hearing on the proposed Code amendments referenced above.

The Commission voted unanimously (6-0) to recommend that the Board of Supervisors approve the amendments.

The Commissioners voted as follows:

President McCarthy Yes Vice-President Walker Yes
Commissioner Clinch Yes Commissioner Konstin Excused
Commissioner Lee Yes Commissioner Moss Yes
Commissioner Warshell Yes

Enclosed please find the Code Advisory Committee's recommendation to the BIC. Under separate cover, copies of the proposed amendments will follow from the Technical Services Division of the Department of Building Inspection.

Should you have any questions, please do not hesitate to call me at 558-6164.


Sincerely,

Sonya Harris


Commission Secretary

cc;

Tom C. Hui, S.E., C.B.O., Director Mayor London N. Breed Supervisor Vallie Brown Supervisor Sandra Lee Fewer Supervisor Matt Haney Supervisor Rafael Mandelman Supervisor Gordon Mar Supervisor Aaron Peskin Supervisor Hillary Ronen Supervisor Ahsha Safai Supervisor Catherine Stefani Supervisor Shamann Walton Supervisor Norman Yee Deputy City Attorney Robb Kapla







AARON PESKIN 佩斯金市參事

DATE:

October 21, 2019

TO:

Angela Calvillo

Clerk of the Board of Supervisors

FROM:

Supervisor Aaron Peskin, Chair, Land Use and Transportation Committee

RE:

Land Use and Transportation Committee

COMMITTEE REPORTS

Pursuant to Board Rule 4.20, as Chair of the Land Use and Transportation Committee, I have deemed the following matters are of an urgent nature and request they be considered by the full Board on Tuesday, October 29, 2019, as Committee Reports:

190866 Fire Code - Repealing 2016 Code, Adopting 2019 Code

Ordinance repealing the existing San Francisco Fire Code in its entirety and enacting a new San Francisco Fire Code consisting of the 2019 California Fire Code and portions of the 2018 International Fire Code, together with amendments specific to San Francisco with an operative date of January 1, 2020; adopting findings of local conditions pursuant to California Health and Safety Code, Section 17958.7; directing the Clerk of the Board of Supervisors to forward San Francisco's amendments to the California Building Standards Commission and State Fire Marshal; and making environmental findings.

190964 Green Building Code - Repeal of Existing 2016 Code and Enactment of 2019 Edition

Ordinance repealing the 2016 Green Building Code in its entirety and enacting a 2019 Green Building Code consisting of the 2019 California Green Building Standards Code as amended by San Francisco; adopting environmental findings and findings of local conditions under the California Health and Safety Code; providing for an operative date of January 1, 2020; and directing, the Clerk of the Board of Supervisors to forward the legislation to the California Building Standards Commission as required by State law.

These matters will be heard in the Land Use and Transportation Committee at a Regular Meeting on Monday, October 28, 2019, at 1:30 p.m.

RECEIVED BOARD OF SUPERVISORE SAN FRANCISCO

City Hall

1 Dictor Roll B. Cookert Plate Room 244

San Aparicisco, CA 94102-4689

Tel. N6. 554-6516 Fax No. 554-7674 TDD/TTY No. 544-6546




President, District 7
BOARD of SUPERVISORS.

Norman Yee

Date: October 1, 2019 To: Angela Calvillo, Clerk of the Board of Supervisors Madam Clerk, Pursuant to Board Rules, I am hereby: Waiving 30-Day Rule (Board Rule No. 3,23) File No. 190964 Department (Primary Sponsor)
Madam Clerk, Pursuant to Board Rules, I am hereby: Waiving 30-Day Rule (Board Rule No. 3.23) File No. 190964 Department
Pursuant to Board Rules, I am hereby: Waiving 30-Day Rule (Board Rule No. 3.23) File No. 190964 Department
File No. 190964 Department
Title. Green Building Code - Repeal of Existing 2016 Code and Enactment of 2019 Edition
☐ Transferting (Board Rule No 3.3)
File No.
(Primary Sponsor) Title.
From: Committee
To: Committee
Assigning Temporary Committee Appointment (Board Rule No. 3.1)
Supervisor: Replacing Supervisor:
For: Meeting
(Date) (Committee) OFull Meeting
Duration: Pattial Start Time End Time Until original Committee Member returns
Norman Yee, President Board of Supervisors

City and County of San Francisco Department of Building Inspection



2019 SEP 23 AM 9: 56

September 20, 2019

Angela Calvillo, Clerk of the Board Board of Supervisors #1 Dr. Carlton B. Goodlett Place, Room 244 San Francisco, CA 94102-4689

Dear Ms. Calvillo:

Attached please find an original and two copies (1 electronic CD) of seven proposed ordinances (approved by the Building Inspection Commission on July 17, 2019) for the Board of Supervisors approval, which repeal the San Francisco amendments to the 2016 California Building Standards Codes and adopt replacement amendments to the new 2019 California Building Standards Codes effective January 1, 2019. (One copy of these 2019 California Building Standards Codes are hereby provided for your reference.)

The following is a list of accompanying documents:

- 1) Approval letter from the Building Inspection Commission
- 2) San Francisco Building Code and Residential Code Ordinance, Legislative Digest), Exhibit A Standard Findings, Findings, proposed amendment text (Building)
- 3) San Francisco Existing Building Code Ordinance, Legislative Digest, Exhibit A Standard Findings, Findings, proposed amendment text. (Existing Building)
- 4) San Francisco Electrical Code Ordinance, Legislative Digest, Exhibit A Standard Findings, Findings, proposed amendment text (Electrical)
- 5) San Francisco Mechanical Code Ordinance, Legislative Digest, Exhibit A Standard Findings, Findings, proposed amendment text (Mechanical)
- 6) San Francisco Plumbing Code Ordinance, Legislative Digest, Exhibit A Standard Findings, Findings, proposed amendment text (Plumbing)
- 7) San Francisco Green Building Code Ordinance, Legislative Digest, Exhibit A Standard Findings, Findings, proposed amendment text (Green), Cost effectiveness study.

In order for the San Francisco code amendments to coordinate with the California codes, which have an effective date of January 1, 2019, the timeline for approval and adoption requires that the codes be submitted to the Board of Supervisors on or before September 23, 2019 for introduction and assignment to the Land Use Committee (on October 1, 2019). We will be requesting a waiver to the thirty-day rule prior to hearing at the Land Use Committee such that the Codes may be heard by the Land Use Committee on October 7, 2019. When approved, it is proposed that the Board of Supervisor agendize Readings on October 15, 2019 and October 22, 2019. Upon their approval, the ordinances will be forwarded to the Mayor for signature within 10 days, followed by a 30-day wait period (ending approximately December 9, 2019) before filing with the California Building Standards Commission to become effective for an implementation date of January 1, 2020.

Technical Services Division

1660 Mission Street – San Francisco CA 94103

Office (415) 558-6205– FAX (415) 558-6401 – www.sfdbi.org

The following person may be contacted regarding this matter:

Michelle Yu, Manager

Technical Services Division

Department of Building Inspection

Phone: (415) 558-6059

Attachments: As stated

Table of Content

1. General

- a. Approval letter from the Building Inspection Commission
- 2. Building Code and Residential Building Requirements
 - a. Legislative Digest
 - b. San Francisco Building Code Ordinance including Residential Building Requirements
 - c. Exhibit A Standard Findings
 - d. Findings
 - e. San Francisco Building Code Amendments
 - f. Residential Building Requirements See Chapter 36 of the San Francisco Building Code
- 3. Existing Building Code
 - a. Legislative Digest
 - b. San Francisco Existing Building Code Ordinance
 - c. Exhibit A Standard Findings
 - d. Findings
 - e. San Francisco Existing Building Code Amendments
- 4. Electrical Code
 - a. Legislative Digest
 - b. San Francisco Electrical Code Ordinance
 - c. Exhibit A Standard Findings
 - d. Findings
 - e. San Francisco Electrical Code Amendments
- 5. Mechanical Code
 - a. Legislative Digest
 - b. San Francisco Mechanical Code Ordinance
 - c. Exhibit A Standard Findings
 - d. Findings
 - e. San Francisco Mechanical Code Amendments
- 6. Plumbing Code
 - a. Legislative Digest
 - b. San Francisco Plumbing Code Ordinance
 - c. Exhibit A Standard Findings
 - d. Findings
 - e. San Francisco Plumbing Code Amendments
- 7. Green Building Code
 - a. Legislative Digest
 - b. San Francisco Green Building Code Ordinance
 - c. Exhibit A Standard Findings
 - d. Findings
 - e. San Francisco Green Building Code Amendments
 - f. Nonresidential New Construction Reach Code Cost Effectiveness Study
 - g. Cost-effectiveness Study: Low-Rise Residential New Construction